


# Ansökan om tillstånd enligt kärntekniklagen

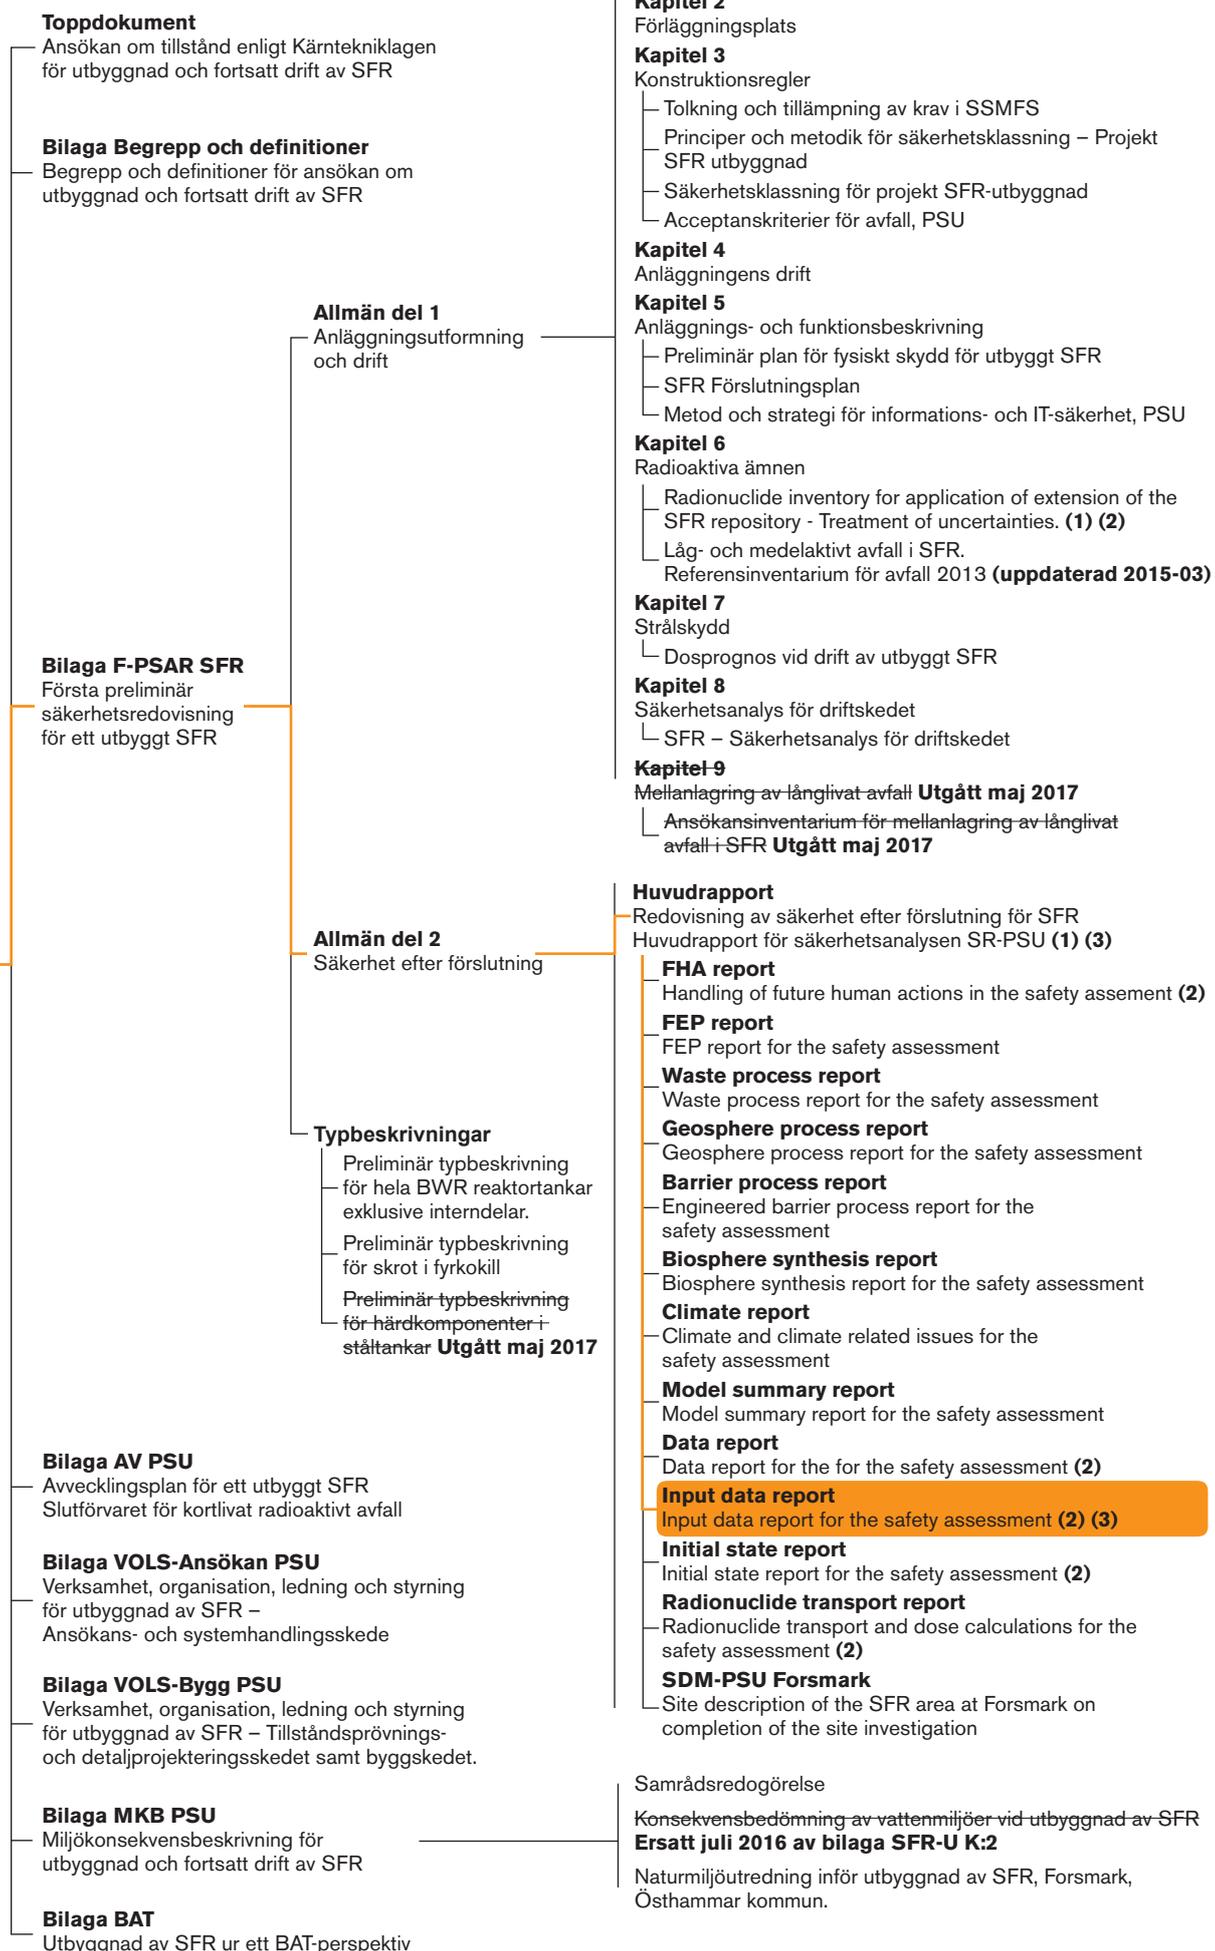

## Kompletteringar

- (1) September 2015 – Svensk version av *Huvudrapport SR-PSU* i allmän del 2 samt ny version (3.0) av *Radionuclide inventory* i allmän del 1 kapitel 6
- (2) Oktober 2015 – Fem uppdaterade rapporter i allmän del 2 samt ny version (4.0) av *Radionuclide inventory* i allmän del 1 kapitel 6
- (3) Oktober 2017 – Uppdatering av *Huvudrapport SR-PSU* och *Input data report*

# Technical Report

## TR-14-12

### Input data report for the safety assessment SR-PSU

Svensk Kärnbränslehantering AB

December 2014

**Svensk Kärnbränslehantering AB**

Swedish Nuclear Fuel  
and Waste Management Co

Box 250, SE-101 24 Stockholm  
Phone +46 8 459 84 00





ISSN 1404-0344

SKB TR-14-12

ID 1461926

Updated 2017-04

# **Input data report for the safety assessment SR-PSU**

Svensk Kärnbränslehantering AB

December 2014

## Update notice

The original report, dated December 2014, was found to contain factual errors which have been corrected in this updated version. The corrected factual errors are presented below

### Updated 2017-04

Location	Original text	Corrected text
Page 22, Section 2.3.1, paragraph 3	The concentration of complexing agents governs a reduction in the sorption capacity of the concrete, further described in the Data report, Chapter 7. The concentrations are used as input in the high concentrations of complexing agents calculation case to set the sorption reduction factors, see the Radionuclide transport report.	The concentration of complexing agents governs a reduction in the sorption capacity of the concrete, further described in the Data report, Chapter 7. The concentrations are used as input in all calculation cases where sorption is accounted for to set the sorption reduction factors, see the Section 3.15.1 and the Radionuclide transport report. A further reduction with a factor of 10 for all radionuclides that are potentially affected by complexing agents (i.e. all radionuclides but C, Ca, Cl, I, Cs, and Mo) are used in the high concentrations of complexing agents calculation case.
Page 45, Section 3.15.1, paragraph 4, <i>Link missing</i> after the heading Concrete		<a href="svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/NearfieldKd(AMF75).xlsx">svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/NearfieldKd(AMF75).xlsx</a>

### Updated 2015-10

Location	Original text	Corrected text
Page 23, Section 2.4.1, paragraph 2	...Inventory report (SKB 2013a).	...Inventory report (SKB 2013a, SKBdoc 1481419 (Mo-93)).
Page 24, Section 2.4.3, paragraph 2	...Inventory report (SKB 2013a)...	...Inventory report (SKB 2013a, SKBdoc 1481419 (Mo-93))...
Page 24, Section 2.4.4, paragraph 2	...Inventory report (SKB 2013a).	...Inventory report (SKB 2013a, SKBdoc 1481419 (Mo-93)).
Page 25, Section 2.4.5, paragraph 2, last sentence	The estimated high radionuclide inventory in each waste-type package in the waste vault is given in Appendix B in SKBdoc 1427105.	This sentence is deleted
Page 135, updated reference	1427105 ver 1.0	1427105 ver 4.0
Page 135, new reference		SKBdoc 1481419 ver 1.0. Ny beräkning av Mo-93 i normkolli till PSU 2015-05 (In Swedish.) SKB, 2015.

# Preface

This report provides data or references to where data can be found that are used in the assessment of the long-term radiation safety of the low-and intermediate level waste repository SFR. The report forms part of the SR-PSU safety assessment, which supports the application for a licence to extend SFR.

The report has been edited by Mikael Asperö, Kemakta Konsult AB. Numerous experts with responsibility for specific scientific topics have contributed to the report.

The report has been reviewed by Sara Grolander, Sara Grolander Miljökonsult AB and the undersigned.

Stockholm, December 2014

*Fredrik Vahlund*

Project leader SR-PSU



## Summary

This report is a compilation of input data and references to input data used in the many different activities in the post-closure safety assessment SR-PSU. The report uses the Assessment Model Flowchart (AMF) to map the data flows between each SR-PSU activity. For each data flow there is a section in this report describing the dataset, its usage and giving a reference to the originating report. Therefore the report can be seen as a complete reference to all input data used in SR-PSU.

The **Input data report** differs from the **Data report** in that the former is a compilation of all the data used in the safety assessment, and the latter is a qualification of selected data deemed as important to the safety assessment. No data qualification is performed in the **Input data report**.

## Sammanfattning

Denna rapport är en sammanställning av alla data som används av de olika delprojekten och aktiviteterna inom den långsiktiga säkerhetsanalysen SR-PSU. Rapporten tar hjälp av en Assessment Model Flowchart (AMF) för att kartlägga dataflödena mellan varje aktivitet, och för varje dataflöde återfinns ett kapitel i rapporten som beskriver dataset, vad de används till och med en referens till ursprungsrapport. Denna rapport kan alltså ses som ett referensverk till alla inputdata inom SR-PSU.

Denna rapport skiljer sig från **Datarapporten** i det att den sistnämnda väljer ut och kvalificerar användandet av ett antal dataset som anses vara av stor betydelse för säkerhetsanalysen. I denna rapport sker ingen sådan kvalificering av data.

# Contents

<b>1</b>	<b>Introduction</b>	15
1.1	Background	15
1.2	Report hierarchy in the SR-PSU safety assessment	16
1.3	This report	16
1.4	Structure of report	18
1.4.1	The Assessment Model Flowchart	18
1.4.2	Section template	18
<b>2</b>	<b>Waste</b>	21
2.1	AMF Number 47	21
2.1.1	Gas formation rates and total gas volumes formed in each waste vault	21
2.2	AMF Number 79	21
2.2.1	Amounts and surface area of metals in each waste vault	21
2.2.2	Amounts and type of organic material in each waste vault	22
2.3	AMF Number 81	22
2.3.1	Molar concentration of complexing agents	22
2.4	AMF Number 86	23
2.4.1	Average radionuclide inventory in each waste-type package (Silo, BMA, BTF)	23
2.4.2	Number of waste packages in each waste vault (Silo, BMA, BTF)	23
2.4.3	Total radionuclide inventory in each waste vault (BLA)	24
2.4.4	Radionuclide inventory in each reactor pressure vessel in BRT	24
2.4.5	Uncertainties in the radionuclide inventory	25
2.5	AMF Number 94	25
2.5.1	Corrosion rates of Al and Zn, carbon steel and stainless steel	25
2.6	AMF Number 95	26
2.6.1	Reactor pressure vessel thickness and corrosion rates as a function of time	26
2.7	AMF Number 118	27
2.7.1	Amounts of complexing agents in waste packages	27
2.7.2	Amounts of cellulose in waste packages	27
2.7.3	Amounts of hydrated cement in waste packages	28
2.7.4	Pore and void volume in the waste packages	28
2.8	AMF Number 120	28
2.8.1	Corrosion rate of steel	28
2.9	AMF Number 122	29
2.9.1	Reactor pressure vessel dimensions and materials	29
2.10	AMF Number 125	30
2.10.1	Possible swelling pressures of bitumen conditioned waste packages in Silo and 1BMA	30
2.11	AMF Number 126	30
2.11.1	Amounts of bitumen, ion exchange resins and salts in waste packages	30
2.12	AMF Number 134	31
2.12.1	Microbial degradation rates	31
2.13	AMF Number 137	31
2.13.1	Amount and allocation of waste packages B05, B06, F17 and F18 in Silo and BMA vaults	31
2.14	AMF Number 154	32
2.15	AMF Number 156	32
2.15.1	Corrosion rates	32
2.16	AMF Number 161	33
2.16.1	Radionuclide inventory	33

2.17	AMF Number 177	33
2.17.1	Amounts of materials in different vaults	33
2.18	AMF Number 178	34
2.18.1	Amounts of materials such as metals and organic matter	34
2.19	AMF Number 208	35
2.19.1	Sodium sulphate, mono sulphate and Katoite amounts in waste	35
<b>3</b>	<b>Near-field excluding waste</b>	<b>37</b>
3.1	AMF Number 25	37
3.1.1	Possibility of concrete degradation due to seismic activity	37
3.2	AMF Number 33	37
3.2.1	Amounts and dimensions of steel in each waste vault	37
3.3	AMF Number 35	38
3.3.1	Assessment of the impact of mechanical processes on the concrete during the assessment time-period	38
3.4	AMF Number 36	38
3.4.1	Concrete freezing temperature	38
3.5	AMF Number 38	39
3.5.1	Assessment of the impact of chemical processes on the concrete during the assessment time-period	39
3.6	AMF Number 41	39
3.6.1	Assessment of the consequences on ice lens formation in the Silo	39
3.7	AMF Number 44	40
3.7.1	Silo vault and waste dimensions	40
3.8	AMF Number 45	40
3.8.1	The physical porosities of the concrete materials used in SFR	40
3.8.2	The hydraulic conductivities of the installed concrete/cement types present in SFR	41
3.9	AMF Number 46	41
3.9.1	The physical porosities of bentonite barrier and plug materials	41
3.9.2	The hydraulic conductivities of bentonite barrier and plug materials	41
3.10	AMF Number 49	42
3.10.1	Redox conditions	42
3.11	AMF Number 50	43
3.11.1	Water flows and flow directions (x, y, z) for each vault and concrete degradation state during relevant time steps.	43
3.12	AMF Number 51	43
3.12.1	Speciation of fresh concrete porewater	43
3.13	AMF Number 61	44
3.13.1	Assessment regarding the state of concrete barriers during assessment time-period	44
3.14	AMF Number 63	44
3.14.1	Assessment regarding state of the bentonite barriers and plugs during assessment time-period	44
3.15	AMF Number 75	45
3.15.1	Sorption partitioning constants for the different materials present in the repository	45
3.15.2	Effective diffusivities for the different materials present in the repository	46
3.15.3	Diffusion available porosities of the different materials present in the repository	47
3.15.4	Densities of the different materials present in the repository	48
3.16	AMF Number 76	49
3.16.1	Radionuclide release from the near-field to the geosphere	49
3.17	AMF Number 85	49
3.17.1	Dimensions of concrete barriers in Silo, BMA, BRT and BTF vaults	49
3.18	AMF Number 100	50
3.18.1	Dimensions of bentonite and bentonite/sand barriers in Silo.	50

3.19	AMF Number 104	51
3.19.1	Assessment of the impact of the repository water flow on sorption processes	51
3.20	AMF Number 109	51
3.20.1	Outflow of water from the repository	51
3.21	AMF Number 113	52
3.21.1	Backfill hydraulic conductivity	52
3.22	AMF Number 116	52
3.22.1	Geometries of SFR 1 and SFR 3 repositories	52
3.23	AMF Number 121	53
3.23.1	pH evolution in BRT vault during assessment time-period	53
3.24	AMF Number 127	53
3.24.1	Geometries of SFR 1 and SFR 3 repositories	53
3.25	AMF Number 132	54
3.25.1	Amounts of hydrated cement present in construction concrete and grout	54
3.25.2	Pore and void volume in vaults	54
3.26	AMF Number 133	55
3.26.1	pH evolution in vaults during assessment time-period	55
3.27	AMF Number 140	55
3.27.1	Subzero temperature at which concrete disintegrates.	55
3.28	AMF Number 146	56
3.28.1	Concrete porewater composition	56
3.29	AMF Number 150	56
3.29.1	Grouting assessment for bitumen containing waste packages	56
3.30	AMF Number 151	57
3.30.1	Allocation of bitumen conditioned waste packages in 1BMA	57
3.30.2	Structural strength data for Silo structural concrete and grout	57
3.30.3	Structural strength data for 1BMA structural concrete, grout and floor gravel	57
3.31	AMF Number 152	58
3.31.1	Geometries of the 1BMA and 2BMA vaults, backfill and concrete barriers	58
3.31.2	Hydraulic conductivities of backfill and concrete barriers	58
3.31.3	Physical porosities of backfill and concrete barriers	59
3.32	AMF Number 153	59
3.32.1	Water flow and flow patterns within the vaults, backfill and concrete barriers	59
3.33	AMF Number 157	60
3.33.1	Effective diffusivities	60
3.33.2	Physical porosities	60
3.33.3	Particle densities	61
3.33.4	Hydraulic conductivities	61
3.33.5	Concrete/Cement Sorption distribution coefficients.	61
3.34	AMF Number 158	62
3.34.1	Near-field water flows during set points in time	62
3.35	AMF Number 160	62
3.35.1	Sorption distribution coefficients for near-field materials	62
3.35.2	Effective diffusivities for near-field materials	63
3.35.3	Diffusion available porosities for Near-field materials	63
3.36	AMF Number 174	64
3.36.1	pH evolution in vaults during assessment time-period	64
3.37	AMF Number 175	64
3.37.1	Void and pore volumes in repository vaults	64
3.37.2	Cement and concrete amounts in repository vaults	65
3.38	AMF Number 176	65
3.38.1	Near-field water flows	65
3.39	AMF Number 179	66
3.39.1	Near-field water flows	66

3.40	AMF Number 181	66
3.40.1	Concrete porewater composition	66
3.41	AMF Number 182	67
3.41.1	Bentonite properties	67
3.41.2	Concrete properties	67
3.42	AMF Number 183	68
3.42.1	Silo layout	68
3.43	AMF Number 185	68
3.43.1	Assessment on bentonite ice lens formation.	68
3.44	AMF Number 205	69
3.44.1	Bentonite material properties	69
3.45	AMF Number 206	69
3.45.1	Evolution of pH in the repository vaults	69
3.46	AMF Number 207	70
3.46.1	Literature data	70
3.47	AMF Number 209	70
3.47.1	Capacity of cement and waste to absorb sulphate	70
<b>4</b>	<b>Geosphere</b>	<b>71</b>
4.1	AMF Number 2	71
4.1.1	Sorption partitioning coefficients	71
4.1.2	Effective diffusivity	71
4.1.3	Rock matrix porosity	72
4.2	AMF Number 3	72
4.2.1	SR-PSU Groundwater types	72
4.3	AMF Number 4	73
4.3.1	Hydrogeological model from SDM-PSU	73
4.4	AMF Number 6	73
4.4.1	Presence or non-presence of extensive rock fallout and EDZ	73
4.5	AMF Number 7	74
4.5.1	Pressure at rock volume boundaries	74
4.5.2	Groundwater velocities in rock volume	74
4.5.3	Permeability of rock volume	75
4.6	AMF Number 9	75
4.6.1	Particle tracks to and from the SFR repositories	75
4.7	AMF Number 10	76
4.7.1	Fracture stress test data	76
4.7.2	Fracture mapping data	76
4.8	AMF Number 11	77
4.8.1	F-factors for travel paths from each repository vault to the surface	77
4.8.2	Travel time for travel paths from each repository vault to the surface	77
4.8.3	Peclet number applicable for entire rock volume	78
4.9	AMF Number 12	78
4.9.1	Exit locations (coordinates) for defined time steps/events	78
4.10	AMF Number 16	79
4.10.1	Radionuclide release from the geosphere to the biosphere	79
4.11	AMF Number 17	80
4.11.1	2D profile at Forsmark	80
4.11.2	Topography and soil types	80
4.11.3	Rock domains and deformation zones	80
4.11.4	Hydraulic properties for rock domains and soil types	81
4.11.5	Thermal properties for rock domains and soil types	81
4.11.6	Ionic composition of ground water	81
4.11.7	Geothermal heat flow	81
4.12	AMF Number 24	82
4.12.1	Seismic response spectrum load of Silo	82
4.13	AMF Number 26	82
4.13.1	Analysis of the consequence of rock fallout	82

4.14	AMF Number 28	83
	4.14.1 Assessment of groundwater influence on repository water	83
4.15	AMF Number 29	83
	4.15.1 Conceptual hydrogeochemical model	83
4.16	AMF Number 62	84
	4.16.1 Site specific data	84
4.17	AMF Number 84	84
	4.17.1 Hydrogeological properties of the rock	84
4.18	AMF Number 87	85
	4.18.1 Sorption partitioning coefficients applicable for entire rock volume	85
	4.18.2 Effective diffusivity applicable for entire rock volume	85
	4.18.3 Rock matrix porosity applicable for entire rock volume	86
4.19	AMF Number 105	86
	4.19.1 Fracture mineral types and occurrences.	86
4.20	AMF Number 110	87
	4.20.1 Mechanical rock properties	87
4.21	AMF Number 135	87
	4.21.1 Fraction of repository water reaching well locations	87
4.22	AMF Number 136	88
	4.22.1 Dose to well	88
4.23	AMF Number 139	88
	4.23.1 Groundwater compositions	88
4.24	AMF Number 145	89
	4.24.1 Groundwater compositions	89
4.25	AMF Number 184	89
	4.25.1 BMA and BLA vault dimensions	89
4.26	AMF Number 197	90
	4.26.1 2D profile at Forsmark	90
	4.26.2 Topography and soil types	90
	4.26.3 Rock domains and deformation zones	90
	4.26.4 Hydraulic properties for rock domains and soil types	91
	4.26.5 Thermal properties for rock domains and soil types	91
	4.26.6 Ionic composition of ground water	91
	4.26.7 Geothermal heat flow	91
4.27	AMF Number 211	92
	4.27.1 Péclet number	92
<b>5</b>	<b>Climate</b>	<b>93</b>
5.1	AMF Number 13	93
	5.1.1 Shore-level evolution	93
5.2	AMF Number 18	93
	5.2.1 Maximum permafrost depth	93
	5.2.2 Shore-level evolution	94
5.3	AMF Number 65	94
	5.3.1 Lowest bedrock temperature at repository depth	94
5.4	AMF Number 66	95
	5.4.1 Monthly mean air temperature at 2 m height	95
5.5	AMF Number 67	96
	5.5.1 Weichselian surface denudation	96
5.6	AMF Number 68	96
	5.6.1 Proxy paleo-air temperature evolution	96
5.7	AMF Number 69	97
	5.7.1 Weichselian ice-sheet load development	97
5.8	AMF Number 72	97
	5.8.1 Shore-level evolution	97
	5.8.2 Wet and warm climate, precipitation	98
	5.8.3 Wet and warm climate, potential evapotranspiration	98
	5.8.4 Wet and warm climate, near-surface air temperature	98

5.9	AMF Number 74	99
5.9.1	Maximum permafrost depth	99
5.10	AMF Number 128	100
5.10.1	Climate evolution	100
5.11	AMF Number 141	100
5.11.1	Range of air temperature and precipitation change until 2100 AD	100
5.11.2	Range of air temperature and precipitation evolution until 12,000 AD	101
5.11.3	Range of climate evolution until 102,000 AD	101
5.11.4	Minimum future projected atmospheric CO2 concentration until 102,000 AD	102
5.12	AMF Number 142	102
5.12.1	Reconstructed Weichselian air temperature evolution	102
5.13	AMF Number 144	103
5.13.1	Range of future sea-level rise at Forsmark	103
5.14	AMF Number 188	104
5.14.1	Maximum depth of isotherms at repository location	104
5.15	AMF Number 189	104
5.15.1	Maximum surface denudation rate	104
5.16	AMF Number 190	105
5.16.1	Shore-level evolution for a future warm climate	105
5.17	AMF Number 191	106
5.17.1	Weichselian glacial cycle climate case ice-sheet evolution	106
5.17.2	Weichselian glacial cycle climate case geosphere temperature evolution	106
5.17.3	Weichselian glacial cycle climate case shore-level evolution	107
5.17.4	Weichselian glacial cycle climate case evolution of climate domains	107
5.18	AMF Number 192	108
5.18.1	Reconstructed Weichselian geosphere temperature development	108
5.19	AMF Number 193	108
5.19.1	Weichselian ice-sheet thickness and temperature development	108
5.20	AMF Number 194	109
5.20.1	Reconstructed Weichselian shore-level evolution	109
5.21	AMF Number 195	109
5.21.1	Weichselian surface denudation	109
5.22	AMF Number 196	110
5.22.1	Weichselian glacial cycle climate case ice-sheet development	110
5.22.2	Weichselian glacial cycle climate case shore-level evolution	110
5.23	AMF Number 198	111
5.23.1	Geothermal heat flux	111
5.24	AMF Number 200	112
5.24.1	Digital elevation	112
5.25	AMF Number 203	112
5.25.1	Future vegetation and surface cover types	112
5.25.2	Future lakes	113
5.26	AMF Number 204	113
5.26.1	Weichselian denudation rate	113
5.27	AMF Number 210	114
5.27.1	Minimum Forsmark air temperature at 2-metres height	114
<b>6</b>	<b>Biosphere</b>	<b>115</b>
6.1	AMF Number 1	115
6.1.1	Bedrock and regolith-layer geometrical data	115
6.1.2	Development of lakes and streams	115
6.1.3	Location of future taliks	116
6.2	AMF Number 20	117
6.2.1	Present day topography and bathymetry	117

6.3	AMF Number 22	118
6.3.1	Present-day climate, precipitation	118
6.3.2	Present-day climate, potential evapotranspiration	118
6.3.3	Present-day climate, near-surface air temperature	119
6.3.4	Present-day sea level	119
6.4	AMF Number 52	120
6.4.1	Regolith depth and stratigraphy models	120
6.4.2	Site-specific hydrogeological properties of regolith types	121
6.5	AMF Number 54	121
6.5.1	Thresholds of the landscape	121
6.5.2	Geometric parameters and infilling of the biosphere objects	122
6.6	AMF Number 88	122
6.6.1	Site generic data	122
6.6.2	Dose coefficients	123
6.7	AMF Number 99	124
6.7.1	Future vegetation and surface cover types	124
6.7.2	Future lakes	124
6.8	AMF Number 102	125
6.8.1	Ecosystem data	125
6.9	AMF Number 103	125
6.9.1	Biosphere object delineation	125
6.10	AMF Number 138	126
6.10.1	Inter-basin water exchange in marine area	126
6.10.2	Inter-compartment water fluxes in marine, limnic and terrestrial ecosystems	127
6.11	AMF Number 164	127
6.11.1	Geometry parameters for biosphere objects	127
6.12	AMF Number 165	128
6.12.1	Element-specific $K_d$ and CR data	128
6.13	AMF Number 166	128
6.13.1	Site-specific concentrations	128
6.13.2	Literature $K_d$ and CR data	129
6.14	AMF Number 172	129
6.14.1	Well investigation	129
6.15	AMF Number 173	130
6.15.1	Percolation	130
	<b>References</b>	131
	<b>Appendix A</b> CC-number used in the compilation of input data for the radionuclide transport calculations and the corresponding CC-name used in the reporting of the PSU safety assessment	137
	<b>Appendix B</b> Assessment Model Flowchart	139




# 1 Introduction

## 1.1 Background

The final repository for short-lived radioactive waste (SFR) located in Forsmark, Sweden is used for the final disposal of short-lived low- and intermediate-level operational waste from Swedish nuclear facilities. SKB plans to extend SFR to host waste from the decommissioning of the nuclear power plants and other nuclear facilities. Additional disposal capacity is needed also for operational waste from nuclear power units in operation since their operation life-times have been extended compared with what was originally planned.

The SFR repository includes waste vaults underground together with buildings above ground that include a number of technical installations. The underground part of the existing facility (SFR 1) is situated at 60 metres depth in the rock and is located below the Baltic Sea. SFR 1 comprises five waste vaults with a disposal capacity of approximately 63,000 m<sup>3</sup>. The extension (SFR 3<sup>1</sup>) will be built at 120 metres depth and will have a disposal capacity of 108,000 m<sup>3</sup> in five new waste vaults plus one new vault for nine boiling water reactor pressure vessels, see Figure 1-1.

The long-term post closure safety of the whole SFR has been assessed and documented in the SR-PSU Main report with supporting documents, see Section 1.2. The Main report is part of SKB's licence application to extend and continue to operate SFR. This report is a main reference and presents, references to the large amounts of data that have been used in SR-PSU safety assessment to calculate and assess the system.

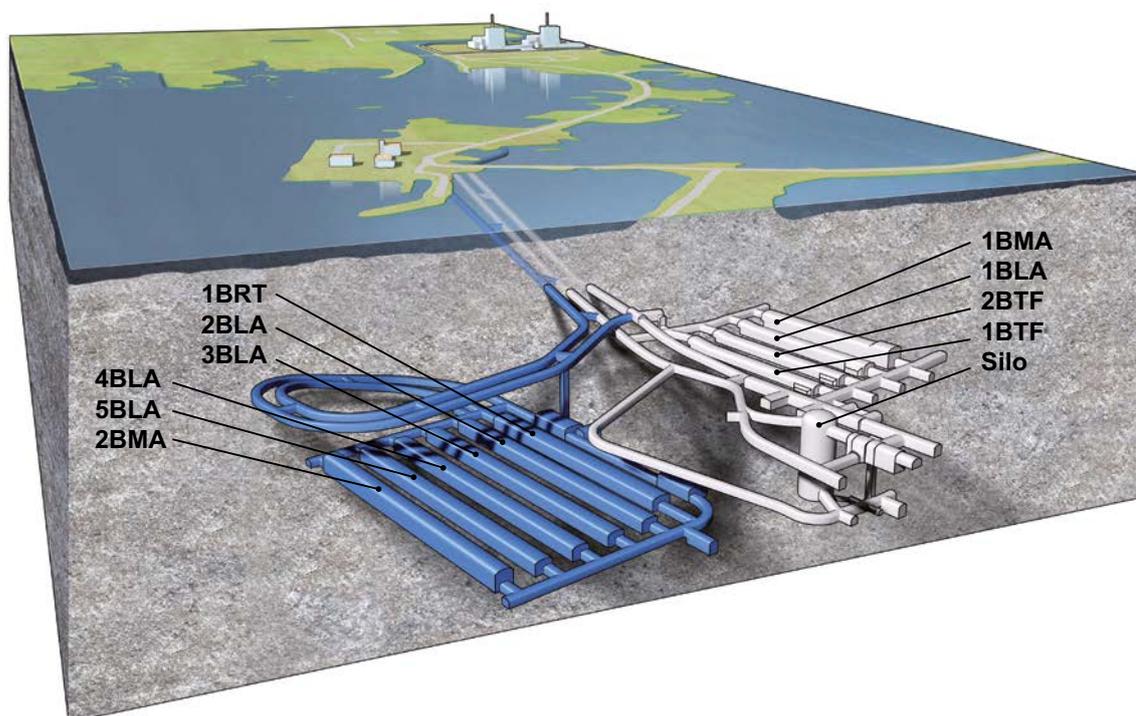

**Figure 1-1.** Schematic illustration of SFR. The grey part is the existing repository (SFR 1) and the blue part is the planned extension (SFR 3). The waste vaults in the figure are the silo for intermediate-level waste, 1–2BMA vaults for intermediate-level waste, 1–2BTF vaults for concrete tanks, 1BLA and 2–5BLA vaults for low-level waste and the BRT vault for reactor pressure vessels.

<sup>1</sup> The extension is called SFR 3 since the name SFR 2 was used in a previous plan to build vaults adjacent to SFR 1 for disposal of reactor core components and internal parts. The current plan is to dispose of this waste in a separate repository.

## 1.2 Report hierarchy in the SR-PSU safety assessment

The applied methodology for the long-term safety comprises ten steps and is described in Chapter 2 of the **Main report**. Several of the steps carried out in the safety assessment are described in more detail in supporting documents, so called main references that are of central importance for the conclusions and analyses in the **Main report**. The full titles of these reports together with the abbreviations by which they are identified in the following text (**abbreviated names in bold font**) together with short comments on the report contents are given in Table 1-1.


There are also a large number of additional references. The additional references include documents compiled within SR-PSU, but also documents compiled outside of the project, either by SKB or equivalent organisations as well as in the scientific literature. Additional publications and other documents are referenced in the usual manner.

A schematic illustration of the safety assessment documents is shown in Figure 1-2.

## 1.3 This report

The Input data report provides data or references to where data can be found for data that are used in the long-term safety assessment SR-PSU of the SFR repository. SR-PSU is performed according to a developed methodology including ten steps (see Chapter 2 in the Main report). This report focuses on Step 6 – Compilation of input data.

Within the SR-PSU safety assessment there are two reports regarding the data handling. This report that gives references to the data used in the safety assessment and the Data report that qualifies the data. The Data report concern the data connected to the SR-PSU safety functions, as defined in assessment Step 5, and their longevity through the repository life time. Data are provided for a selection of relevant conditions and are qualified through traceable standardised procedures. Together these two reports form a data package which both qualifies and motivates important data as well as documents used input data in assessment Step 9 – Analysis of the selected scenarios.

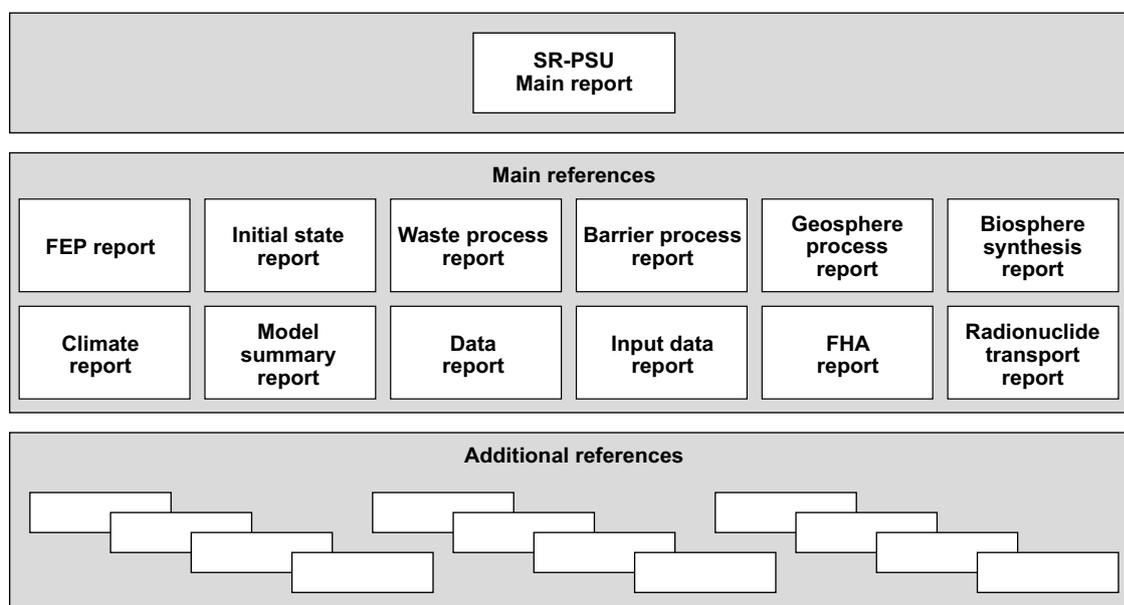

**Figure 1-2.** The hierarchy of the Main report, main references and additional references in the SR-PSU long-term safety assessment. The additional references either support the Main report or any of the main references.

**Table 1-1. Main report and Main references in the SR-PSU long term safety assessment.**  
**All reports are available at [www.skb.se](http://www.skb.se)**

Abbreviation used when referenced in this report	Full reference	Comment on content
Main report	<b>Main report, 2014.</b> Safety analysis for SFR. Long-term safety. Main report for the safety assessment SR-PSU. SKB TR-14-01, Svensk Kärnbränslehantering AB.	This document is the main report of the SR-PSU long-term post-closure safety assessment for SFR. The report is part of SKB's licence application to extend and continue to operate SFR.
Barriers process report	<b>Engineered barriers process report, 2014.</b> Engineered barrier process report for the safety assessment SR-PSU. SKB TR-14-04, Svensk Kärnbränslehantering AB.	Describes the current scientific understanding of the processes in the engineered barriers that have been identified in the FEP processing as potentially relevant for the long-term safety of the repository. Reasons are given in the process report as to why each process is handled a particular way in the safety assessment.
Biosphere synthesis report	<b>Biosphere synthesis report, 2014.</b> Biosphere synthesis report for the safety assessment SR-PSU. SKB TR-14-06, Svensk Kärnbränslehantering AB.	Describes the handling of the biosphere in the safety assessment. The report summarises site description and landscape evolution, FEP handling, exposure pathway analysis, the radionuclide model for the biosphere, included parameters, biosphere calculation cases and simulation results.
Climate report	<b>Climate report, 2014.</b> Climate and climate-related issues for the safety assessment SR-PSU. SKB TR-13-05, Svensk Kärnbränslehantering AB.	Describes the current scientific understanding of climate and climate-related processes that have been identified in the FEP processing as potentially relevant for the long-term safety of the repository. The report also describes the climate cases that are analysed in the safety assessment.
Data report	<b>Data report, 2014.</b> Data report for the safety assessment SR-PSU. SKB TR-14-10, Svensk Kärnbränslehantering AB.	Qualifies data and describes how data, including uncertainties, that are used in the safety assessment are quality assured.
FEP report	<b>FEP report, 2014.</b> FEP report for the safety assessment SR-PSU. SKB TR-14-07, Svensk Kärnbränslehantering AB.	Describes the establishment of a catalogue of features, events and processes (FEPs) that are of potential importance in assessing the long-term functioning of the repository.
FHA report	<b>FHA report, 2014.</b> Handling of future human actions in the safety assessment SR-PSU. SKB TR-14-08, Svensk Kärnbränslehantering AB.	Describes radiological consequences of future human actions (FHA) that are analysed separately from the main scenario, which is based on the reference evolution and less probable evolutions.
Geosphere process report	<b>Geosphere process report, 2014.</b> Geosphere process report for the safety assessment SR-PSU. SKB TR-14-05, Svensk Kärnbränslehantering AB.	Describes the current scientific understanding of the processes in the geosphere that have been identified in the FEP processing as potentially relevant for the long-term safety of the repository. Reasons are given in the process report as to why each process is handled a particular way in the safety assessment.
Initial state report	<b>Initial state report, 2014.</b> Initial state report for the safety assessment SR-PSU. SKB TR-14-02, Svensk Kärnbränslehantering AB.	Describes the conditions (state) prevailing in SFR after closure. The initial state is based on verified and documented properties of the repository and an assessment of the evolution during the period up to closure.
Input data report	<b>Input data report, 2014.</b> Input data report for the safety assessment SR-PSU. SKB TR-14-12, Svensk Kärnbränslehantering AB.	Describes the activities performed within the SR-PSU safety assessment and the input data used to perform these activities.
Model summary report	<b>Model summary report, 2014.</b> Model summary report for the safety assessment SR-PSU. SKB TR-14-11, Svensk Kärnbränslehantering AB.	Describes the calculation codes used in the assessment.
Radionuclide transport report	<b>Radionuclide transport report, 2014.</b> Radionuclide transport and dose calculations for the safety assessment SR-PSU. SKB TR-14-09, Svensk Kärnbränslehantering AB.	Describes the radionuclide transport calculations carried out for the purpose of demonstrating fulfilment of the criterion regarding radiological risk.
Waste process report	<b>Waste process report, 2014.</b> Waste form and packaging process report for the safety assessment SR-PSU. SKB TR-14-03, Svensk Kärnbränslehantering AB.	Describes the current scientific understanding of the processes in the waste and its packaging that have been identified in the FEP processing as potentially relevant for the long-term safety of the repository. Reasons are given in the process report as to why each process is handled in a particular way in the safety assessment.

## 1.4 Structure of report

This section explains how the report is structured and how data identification was performed.

### 1.4.1 The Assessment Model Flowchart

To be able to identify all the SR-PSU activities and the data flow between these activities an Assessment Model Flowchart (AMF) was created with boxes representing modelling activities and lines between the boxes representing data flow, see Appendix B.

The AMF aims to be as complete as possible regarding the data flow occurring within the SR -PSU safety assessment but there are some limitations that need to be highlighted. References to older methodology and software usage e.g. from earlier safety assessments are not included as data, which also includes references to mathematical expressions and deductions.

Oval shapes in the AMF signify that they do not have any input connections. These oval shapes symbolise data taken either from the **Initial state report**, previous long-term safety assessments (SR Site (SKB 2011) or SAR-08/SAFE reports (SKB 2001, 2008)), or peer reviewed literature taken from outside the SR-PSU safety assessment.

To be able to map the data going between the different activities each of the lines connecting the boxes are assigned a unique number as seen in Appendix B. This box number corresponds to a section in this report, and the sections are ordered by these numbers within the areas: Waste (yellow), Near-field, excluding waste (blue), Geosphere (red), Climate (grey) and Biosphere (green).

As the sections are sorted by the AMF numbers in an ascending order the report might seem unstructured from a quick browsing perspective. To avoid this it is recommended to print out the AMF in Appendix B and use it as guide when reading the report.

Each section is made from a section template which is designed to be easily readable and easily understandable for someone looking for information regarding particular data flows.

### 1.4.2 Section template

As written above each section in this report follows the same template. This template is described below with text under each heading describing what is supposed to be found there. Therefore this section can be seen both as a guide for the reader and as an instruction for the writing by the data supplier. Each section starts with an overview table detailing the datasets included in it, see below.

Dataset name (Just the name of the dataset, for readability and Microsoft Word indexing. No text is written below the header.)

---

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Originating AMF Activity	AMF Activity where data will be used

---

**Dataset**  
Dataset 1 name  
Dataset 2 name

---

#### **Short description of data**

Here a short description of the dataset is given. The focus in this section is the data itself and not what is used for, which is described further in a section below. For instance, if the dataset contains possible concentrations of complexing agents in repository vaults it is sufficient to describe what the complexing agents consists of. The description need not be longer than a couple of lines and use of references to underlying reports are encouraged.

### **Source of data**

This section should give a description of how the data were produced. Was it a result from for example a modelling activity, assessment, experiment, site investigation or a literature survey? The text should be short but a reference to the underlying assessment (a chapter in the **Data report**) or modelling activity is required. If the data are taken from a SR-Site report or from the **Initial state report** it is sufficient to reference to them, preferably not only to the report but also to the table the data have been taken from.

### **Used in model or assessment activity**

This section should describe how and for what purpose the dataset is used. If the dataset is used in a model a short description of the purpose of the modelling activity should be supplied along with a reference to the underlying report. If the data are used in an assessment the purpose of the latter should be described along with a reference (which can be a **Data report** chapter).

### **Data used**

In this section a link or reference to where the complete dataset can be found is given. The reference can be to a table in a published report and/or if applicable with a SVN-link or SKBdoc-number to where the dataset can be found.<sup>2</sup>

TortoiseSVN is a Subversion (SVN) client, implemented as a Windows shell extension. TortoiseSVN is an Open Source project developed under the GNU General Public License (GPL) and has a wide-spread use all over the world (<http://tortoisesvn.net/>). It provides a user friendly interface for Subversion (<http://subversion.apache.org/>). Subversion is a widespread version handler for files and open source project under The Apache Software Foundation, licensed under the Apache License, Version 2.0. Subversion provides flexible and traceable environment for modelling results, parameter data, model and documents.

All GIS (Geographical Information System) related data at SKB are stored in the SDE (Spatial Database Engine) database. The SDE-database is a server-software sub-system and managed by ESRI (<http://www.esri.com/software/arcgis/arcscde>).

---

<sup>2</sup> The data stored as SVN-files, documents in SKBdoc, and in the GIS database can be made available upon request.



## 2 Waste

### 2.1 AMF Number 47

---

<b>Output from AMF activity</b> Production of gas	<b>Input to AMF activity</b> RN transport due to gas pressure
--	--

---

**Dataset**  
Gas formation rates and total gas volumes formed in each waste vault

---

#### 2.1.1 Gas formation rates and total gas volumes formed in each waste vault

##### *Short description of data*

The dataset contains rates of gas formed from corrosion of metals in waste packages and structures, and from microbial degradation of cellulose and other organic material. The gases produced are mainly H<sub>2</sub> from the metallic corrosion and CH<sub>4</sub> and CO<sub>2</sub> from the microbial degradation.

##### *Source of data*

The data are taken from calculations given in Moreno and Neretnieks (2013, Appendix A).

##### *Used in model or assessment activity*

The data are used in modelling activities that assess the consequences of the formed gas pressuring out the radionuclides from the vaults. This is further described in Moreno and Neretnieks (2013).

##### *Data used*

The gas formation rates due to metallic corrosion and microbial degradation for the silo and the waste vaults are given in Moreno and Neretnieks (2013, Table A-12). Initially, the gas formation rate is totally dominated by the corrosion of aluminium and the total amount of gas is dominated by the corrosion of steel. Total gas volumes formed in the repository are given in Moreno and Neretnieks (2013, Table A-13).

### 2.2 AMF Number 79

---

<b>Output from AMF activity</b> Initial state – Waste	<b>Input to AMF activity</b> Production of gas
--	---

---

**Dataset**  
Amounts and surface area of metals in each waste vault  
Amounts and type of organic material in each waste vault

---

#### 2.2.1 Amounts and surface area of metals in each waste vault

##### *Short description of data*

The datasets contain amounts and corroding surface areas of aluminium/zinc and stainless/carbon steel found in the waste packages in the repository.

##### *Source of data*

In Moreno and Neretnieks (2013, Appendix A) references are given to where the datasets are taken from.

### ***Used in model or assessment activity***

The datasets are used in the calculations of gas formation in SFR due to metal corrosion. This is further described in Moreno and Neretnieks (2013, Appendix A, Section 2).

### ***Data used***

See Source of data.

## **2.2.2 Amounts and type of organic material in each waste vault**

### ***Short description of data***

The datasets contain amounts and types of organic material found in the repository.

### ***Source of data***

In Moreno and Neretnieks (2013, Appendix A) references are given to where the datasets are taken from.

### ***Used in model or assessment activity***

The datasets are used in the calculations of gas formation in SFR due to microbial degradation of organic material. This is further described in Moreno and Neretnieks (2013, Appendix A, Section 3).

### ***Data used***

See Source of data.

## **2.3 AMF Number 81**

---

### **Output from AMF activity**

Concentration of complexing agents

### **Input to AMF activity**

Non-flow related RN transport properties

---

### **Dataset**

Molar concentration of complexing agents in the Silo, BMA, and BTF

---

## **2.3.1 Molar concentration of complexing agents**

### ***Short description of data***

The datasets contain estimates of the total concentrations of complexing agents in waste packages and other relevant units for the Silo, 1–2BMA and 1–2BTF. High concentrations of complexing agents can reduce radionuclide sorption to concrete.

### ***Source of data***

The concentrations of ISA (Isosaccharinic Acid) are calculated for different time periods and are given in Keith-Roach et al. (2014, Tables C-1 to C-3). The calculated concentrations of the complexing agents (EDTA, NKP, NTA, Citrate and Oxalate) are given in Keith-Roach et al. (2014, Table C-4).

### ***Used in model or assessment activity***

The concentration of complexing agents governs a reduction in the sorption capacity of the concrete, further described in the Data report, Chapter 7. The concentrations are used as input in all calculation cases where sorption is accounted for to set the sorption reduction factors, see the Section 3.15.1 and the Radionuclide transport report. A further reduction with a factor of 10 for all radionuclides that are potentially affected by complexing agents (i.e. all radionuclides but C, Ca, Cl, I, Cs, and Mo) are used in the high concentrations of complexing agents calculation case.

### ***Data used***

See Source of data.

## 2.4 AMF Number 86

---

Output from AMF activity	Input to AMF activity
Initial state – Waste	RN transport in water phase

---

**Dataset**

Average radionuclide inventory in each waste-type package (Silo, BMA, BTF)  
Number of waste packages in each waste vault (Silo, BMA, BTF)  
Total radionuclide inventory in each waste vault (BLA)  
Radionuclide inventory in each reactor pressure vessel in BRT  
Uncertainties in the radionuclide inventory

---

### 2.4.1 Average radionuclide inventory in each waste-type package (Silo, BMA, BTF)

#### **Short description of data**

The dataset contains the estimated average radionuclide inventory in each waste-type package in the waste vaults (Silo, 1–2BMA and 1–2BTF).

#### **Source of data**

The average radionuclide inventory in each waste-type package is given in Appendix E in the Inventory report (SKB 2013a, SKBdoc 1481419 (Mo-93)).

#### **Used in model or assessment activity**

The average radionuclide inventory in the operational and decommissioning waste packages is together with the information on the number of waste packages in the waste vaults used to define the best estimate radionuclide inventory. This inventory is used in all calculation cases except the *high inventory calculation case*, see the **Radionuclide transport report**.

#### **Data used**

The data used are stored in the file:  
svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/TIA (AMF86).xlsx

### 2.4.2 Number of waste packages in each waste vault (Silo, BMA, BTF)

#### **Short description of data**

The dataset contains the number of different waste-type packages allocated to the Silo, 1–2 BMA and 1–2BTF vaults.

#### **Source of data**

The allocation of different waste types to the waste vaults is given in the **Initial state report** (Table A-1). In addition, the allocation of waste-type packages to different shafts in the Silo and compartments in 1BMA is described in the **Initial state report** (Section 3.7).

#### **Used in model or assessment activity**

See Section 2.4.1.

#### **Data used**

The data used are stored in the files:  
svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/Silo/Silo\_NRWP (AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA1/BMA1\_NRWP(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA2/BMA2\_NRWP(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF1/BTF1\_NRWP(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF2/BTF2\_NRWP(AMF86).xlsx

### 2.4.3 Total radionuclide inventory in each waste vault (BLA)

#### **Short description of data**

The dataset contains the total radionuclide inventory in the waste vaults 1BLA and 2–5BLA.

#### **Source of data**

The best estimate radionuclide inventory in 1BLA and 2–5BLA is given in the **Initial state report** (Table 3-16). The inventory is based on the average radionuclide inventory in each waste-type package given in Appendix E in the Inventory report (SKB 2013a, SKBdoc 1481419 (Mo-93)) and the number of different waste-type packages allocated to the waste vaults given in the **Initial state report** (Table A-1).

#### **Used in model or assessment activity**

The best estimate radionuclide inventory is used in all calculation cases except the *high inventory calculation case*, see the **Radionuclide transport report**.

#### **Data used**

The data used are stored in the files:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BLA1/BLA1\_TotalInitialAmount(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BLA2 5/BLA2-5\_TotalInitialAmount(AMF86).xlsx

### 2.4.4 Radionuclide inventory in each reactor pressure vessel in BRT

#### **Short description of data**

The dataset contains the best estimate radionuclide inventory in the nine reactor pressure vessel. The inventory is given as induced and surface activity for each reactor pressure vessel.

#### **Source of data**

The radionuclide inventory in each reactor pressure vessel in the waste vault BRT is given in Appendix E in the Inventory report (SKB 2013a, SKBdoc 1481419 (Mo-93)).

#### **Used in model or assessment activity**

The best estimate radionuclide inventory is used in all calculation cases except the *high inventory calculation case*, see the **Radionuclide transport report**.

#### **Data used**

The data used are stored in the file:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BRT\_InitialAmount(AMF86).xlsx

## 2.4.5 Uncertainties in the radionuclide inventory

### Short description of data

The dataset contains the radionuclide inventory in each waste vault calculated from the best estimate inventory including uncertainties.

### Source of data

The uncertainties in the radionuclide inventory are discussed in Chapter 4 in the **Data report**. The detailed description of the uncertainties considered in the estimates of this inventory is described in SKBdoc 1427105.

### Used in model or assessment activity

This radionuclide inventory is used in the *high inventory calculation case*, see the **Radionuclide transport report**.

### Data used

The data used are stored in the files<sup>3</sup>:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/OtherScenarios/CC20\_Silo\_InitialAmountUncFactor(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/OtherScenarios/CC20\_BMA1\_InitialAmountUncFactor(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/OtherScenarios/CC20\_BMA2\_InitialAmountUncFactor(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/OtherScenarios/CC20\_BTF1\_InitialAmountUncFactor(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/OtherScenarios/CC20\_BTF2\_InitialAmountUncFactor(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/OtherScenarios/CC20\_BLA1\_InitialAmountUncFactor(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/OtherScenarios/CC20\_BLA2-5\_InitialAmountUncFactor(AMF86).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/OtherScenarios/CC20\_BRT\_InitialAmountUncFactor(AMF86).xlsx

## 2.5 AMF Number 94

---

### Output from AMF activity

Corrosion rates

### Input to AMF activity

Production of gas

---

### Dataset

Corrosion rates of Al and Zn, carbon steel and stainless steel

---

### 2.5.1 Corrosion rates of Al and Zn, carbon steel and stainless steel

#### Short description of data

The dataset contains corrosion rates of aluminium/zinc and steel during saturated conditions used in the calculations of gas production.

---

<sup>3</sup> A CC-number is included in the name of the file, the corresponding CC-name used in the reporting of the PSU safety assessment can be found in Appendix A.

### **Source of data**

The data are taken from a literature survey further described in Chapter 5 in the **Data report**. The literature survey focused on possible corrosion rates of metals under repository conditions.

### **Used in model or assessment activity**

The data are used in a modelling activity to estimate possible hydrogen gas amounts in the repository stemming from the corrosions of the metals present in the waste and the concrete barriers. The modelling activity is further described in Moreno and Neretnieks (2013, Appendix A).

### **Data used**

The corrosion rate used in the gas production calculations for aluminium and zinc is 1 (mm/year) and for carbon and stainless steel 0.05 ( $\mu\text{m}/\text{year}$ ) (Moreno and Neretnieks 2013, Appendix A).

## **2.6 AMF Number 95**

---

### **Output from AMF activity**

Corrosion of reactor pressure vessels

### **Input to AMF activity**

RN transport in water phase

---

### **Dataset**

Reactor pressure vessel thickness and corrosion rates as a function of time

---

### **2.6.1 Reactor pressure vessel thickness and corrosion rates as a function of time**

#### **Short description of data**

The dataset contains the assumed thickness of the reactor pressure vessels, corrosion rates for carbon steel, as well as the point in time when the corrosion rate changes due to changed pH of the surroundings.

#### **Source of data**

The corrosion rates are given in AMF number 120 (Section 2.8), the dimensions of the reactor pressure vessels are given in AMF number 122 (Section 2.9) and the evolution of pH is given in AMF number 121 (Section 3.23).

#### **Used in model or assessment activity**

The data are used in the radionuclide transport calculations. The corrosion rate of the reactor pressure vessels determines the release rate of induced activity, see Chapter 9 in the **Radionuclide transport report**.

#### **Data used**

The data used are stored in the file:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BRT/CorrosionTime(AMF95).xlsx

## 2.7 AMF Number 118

---

Output from AMF activity	Input to AMF activity
Initial state – Waste	Concentration of complexing agents

---

**Amounts of complexing agents (gluconate, EDTA, NTA) in waste packages**

Amounts of cellulose in waste packages  
Amounts of hydrated cement in waste packages  
Pore and void volume in waste packages

---

### 2.7.1 Amounts of complexing agents in waste packages

#### **Short description of data**

The dataset contains the estimated amounts of gluconate, EDTA and NTA present in the waste packages. Gluconate, EDTA and NTA are complexing agents that can reduce radionuclide sorption to the concrete and bentonite barriers.

#### **Source of data**

The estimated amounts of complexing agents per waste package are given in Keith-Roach et al. (2014, Table 3-2).

#### **Used in models, assessments, scenarios, and calculation cases**

The amounts of existing complexing agents are used in the calculations of the expected concentration of complexing agents in waste packages and waste vault. The calculations are further described in Keith-Roach et al. (2014).

#### **Data used**

See Source of data.

### 2.7.2 Amounts of cellulose in waste packages

#### **Short description of data**

The dataset contains the estimated amounts of cellulose present in the waste packages. Under repository conditions cellulose can degrade to isosaccharinate (ISA), a complexing agent that can reduce radionuclide sorption.

#### **Source of data**

The estimated amounts of cellulose in relevant waste packages are given in Keith-Roach et al. (2014, Table 3-1).

#### **Used in model or assessment activity**

The amounts of cellulose are used to calculate the concentration of the ISA complexing agent in waste packages and waste vaults. The calculations are further described in Keith-Roach et al. (2014).

#### **Data used**

See Source of data.

### 2.7.3 Amounts of hydrated cement in waste packages

#### **Short description of data**

The dataset contains the amount of hydrated cement in conditioned waste and waste packaging is used to assess the sorption of the complexing agents.

#### **Source of data**

The estimated amounts of hydrated cement are given in Keith-Roach et al. (2014, Table B-4).

#### **Used in model or assessment activity**

The data are used in Keith-Roach et al. (2014) to assess the concentration of complexing in the aqueous phase in waste packages and other defined repository parts.

#### **Data used**

See Source of data.

### 2.7.4 Pore and void volume in the waste packages

#### **Short description of data**

The dataset contains the total pore volume in conditioned waste and packaging that will be saturated after closure.

#### **Source of data**

The void volumes are given in Appendix E in the Inventory report (SKB 2013a) and the pore volumes are calculated directly in Keith-Roach et al. (2014, Table B-4) and compared with information given in Appendix A in the **Initial state report**.

#### **Used in model or assessment activity**

The data are used in Keith-Roach et al. (2014) to assess the concentration of complexing agents in waste packages and other defined repository parts.

#### **Data used**

See Source of data.

## 2.8 AMF Number 120

---

#### **Output from AMF activity**

Corrosion rates

#### **Input to AMF activity**

Corrosion of reactor pressure vessels

---

#### **Dataset**

Corrosion rate of steel

---

### 2.8.1 Corrosion rate of steel

#### **Short description of data**

The dataset contains the corrosion rates of the reactor pressure vessels during saturated conditions.

### **Source of data**

The corrosion rates are taken from a literature survey that focused on possible corrosion rates of metals under saturated conditions, see the **Data report** (Chapter 5). Corrosion rates for carbon and stainless steel for different repository conditions are given in Table 5-3 and Table 5-4 respectively in the **Data report**, where the data are qualified.

### **Used in model or assessment activity**

The data are used for corrosion of the reactor pressure vessels in the radionuclide transport calculations.

### **Data used**

See AMF number 95, Section 2.6.

## **2.9 AMF Number 122**

---

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Initial state – Waste	Corrosion of reactor pressure vessels

---

**Dataset**  
Reactor pressure vessel dimensions and materials

---

### **2.9.1 Reactor pressure vessel dimensions and materials**

#### **Short description of data**

To estimate the corrosion of the reactor pressure vessel the thickness and surface area available for corrosion are required as well as amounts of steel materials.

#### **Source of data**

Detailed information on the nine reactor pressure vessels can be found in Appendix E in the Inventory report (SKB 2013a).

#### **Used in model or assessment activity**

The data are used to describe the corrosion of the reactor pressure vessels in the radionuclide transport calculations, see the **Radionuclide transport report**.

#### **Data used**

See AMF number 95, Section 2.6.

## 2.10 AMF Number 125

---

<b>Output from AMF activity</b> Bitumen swelling Pressure	<b>Input to AMF activity</b> Bitumen swelling assessment
<b>Dataset</b> Possible swelling pressures of bitumen conditioned waste packages in Silo and 1BMA	

---

### 2.10.1 Possible swelling pressures of bitumen conditioned waste packages in Silo and 1BMA

#### **Short description of data**

The data contain estimated swelling pressures (Pa) from packages with waste conditioned in bitumen. The swelling pressure is given as a function of available expansion volume.

#### **Source of data**

The dataset is a result of a literature survey of available swelling pressure data. The data are given in Table 6-7 in the **Data report** where the data also are qualified.

#### **Used in model or assessment activity**

The pressures are used in modelling work to assess the mechanical impact of swelling waste in the Silo and 1BMA (see von Schenck and Bultmark 2014).

#### **Data used**

See Source of data.

## 2.11 AMF Number 126

---

<b>Output from AMF activity</b> Initial state – Waste	<b>Input to AMF activity</b> Bitumen swelling pressures
<b>Dataset</b> Amounts of bitumen, ion-exchange resins and salts in waste packages (B05, B06, F17 and F18)	

---

### 2.11.1 Amounts of bitumen, ion exchange resins and salts in waste packages

The amounts of bitumen, ion exchange resins and salts in waste packages have been compiled for the waste types B05, B06, F17 and F18.

#### **Source of data**

The data are given in Appendix E in the Inventory report (SKB 2013a).

#### **Used in model or assessment activity**

The amounts are used to estimate the potential swelling pressures of bituminised waste packages in the Silo and 1BMA, as outlined in Chapter 6 of the **Data report**.

#### **Data used**

See Source of data.

## 2.12 AMF Number 134

---

<b>Output from AMF activity</b> Microbial activity	<b>Input to AMF activity</b> Production of gas
<b>Dataset</b> Microbial degradation rates	

---

### 2.12.1 Microbial degradation rates

#### **Short description of data**

The dataset contains the microbial degradation rates for cellulose and other organics (e.g. bitumen, ion-exchange resins and other plastics) during saturated conditions used in the calculations of gas production.

#### **Source of data**

The degradation rates used in the gas production calculations for cellulose and for other organic material are given in Moreno and Neretnieks (2013, Appendix A).

#### **Used in model or assessment activity**

The data are used in a modelling activity to estimate gas formation in the repository. The modelling activity is further described in Moreno and Neretnieks (2013, Appendix A).

#### **Data used**

See Source of data.

## 2.13 AMF Number 137

---

<b>Output from AMF activity</b> Initial state – Waste	<b>Input to AMF activity</b> Bitumen swelling assessment
<b>Dataset</b> Amount and allocation of waste packages B05, B06, F17 and F18 in Silo and BMA vaults.	

---

### 2.13.1 Amount and allocation of waste packages B05, B06, F17 and F18 in Silo and BMA vaults

#### **Short description of data**

Amount and allocation of waste packages with bitumen solidified waste to shafts in the Silo and compartments in 1BMA.

#### **Source of data**

The waste packages with bitumen are allocated to the nine interior shafts in the Silo, see the **Initial state report** (Figure 7-2). In 1BMA the waste packages with bitumen are allocated to separate compartments. The distribution of waste types between the different compartments in 1BMA is described in the **Initial state report** (Table 3-14). The number of waste packages with bitumen solidified waste (B05, B06, F17 and F18) in the Silo and 1BMA is given in the **Initial state report** (Table A-1).

### **Used in model or assessment activity**

The amount and allocation are used to assess the mechanical impact of swelling waste in the Silo and IBMA (von Schenck and Bultmark 2014)

### **Data used**

See Source of data.

## **2.14 AMF Number 154**

---

<b>Output from AMF activity</b> Bitumen litterature data	<b>Input to AMF activity</b> Bitumen swelling pressures
---	--

---

<b>Dataset</b> Bitumen litterature data
--

---

### **Short description of data**

This is a list of the references reviewed in a literature survey, performed to support the estimation of possible swelling pressures in bituminised waste.

### **Source of data**

The literature review is presented in Chapter 6 in the **Data report** where the data also are qualified. The literature references are given in Table 6-5 in the **Data report**.

### **Used in model or assessment activity**

The literature data are used to estimate the possible swelling pressures in bituminised waste. The assessment is described in detail in Chapter 6 of the **Data report**.

### **Data used**

See Source of data.

## **2.15 AMF Number 156**

---

<b>Output from AMF activity</b> Corrosion rates literature data	<b>Input to AMF activity</b> Corrosion rates
--	---

---

<b>Dataset</b> Corrosion rates of Al and Zn, carbon steel and stainless steel
--

---

### **2.15.1 Corrosion rates**

#### **Short description of data**

Compilation of corrosion rates for aluminium/zinc, carbon steel and stainless steel for different repository conditions.

#### **Source of data**

The corrosion rates are taken from a literature survey that focused on possible corrosion rates of metals under repository conditions. The suggested data for carbon and stainless steel are given in Table 5-3 and Table 5-4 and for aluminium/zinc in Table 5-5 in the **Data report**, where the data also are qualified.

**Used in model or assessment activity**

The corrosion rates are used in the gas production calculations.

**Data used**

See AMF number 94, Section 2.5.

## 2.16 AMF Number 161

---

<b>Output from AMF activity</b> Initial state – Waste	<b>Input to AMF activity</b> RN transport due to gas pressure
--	--

---

<b>Dataset</b> Radionuclide inventory
--

---

### 2.16.1 Radionuclide inventory

**Short description of data**

The dataset contains the inventory of the selected radionuclides in Becquerel.

**Source of data**

The data are given in Moreno and Neretnieks (2013, Appendix B.4).

**Used in model or assessment activity**

The radionuclide inventory is used for assessing gas driven transport of radionuclides, further described in Moreno and Neretnieks (2013).

**Data used**

See Source of data.

## 2.17 AMF Number 177

---

<b>Output from AMF activity</b> Initial state – Waste	<b>Input to AMF activity</b> Evolution of repository pH
--	--

---

<b>Dataset</b> Amounts of materials in different vaults
--

---

### 2.17.1 Amounts of materials in different vaults

**Short description of data**

Content of various components identified as having a potential impact in the pH evolution in the different waste vaults.

**Source of data**

The data are given in Cronstrand (2014, Table 3-10).

### ***Used in model or assessment activity***

The data are used in the assessment activity to evaluate the pH evolution in the waste domain. It is concluded that the content of cement and concrete has the major impact on the pH evolution for all waste vaults except 1BLA (Cronstrand 2014, Figure 3-1). The pH evolution in the repository is described in Cronstrand (2014) and in the **Main report** (Chapter 6, Chemical evolution of the waste domain and Evolution of engineered barriers).

### ***Data used***

See Source of data.

## **2.18 AMF Number 178**

---

### **Output from AMF activity**

Waste characterisation

### **Input to AMF activity**

Evolution of repository redox

---

### **Dataset**

Amounts of materials such as metals and organic matter

---

### **2.18.1 Amounts of materials such as metals and organic matter**

#### ***Short description of data***

After repository closure, the reducing capacity is initially provided by the content of organic material and by the steel and its corrosion products.

#### ***Source of data***

The amounts of steel and organic material in waste types representative for the different repository parts have been selected for the modelling of the evolution of redox conditions (Duro et al. 2012, Chapter 4).

### ***Used in model or assessment activity***

The data are used in modelling of the redox evolution of the SFR repository. The redox-evolution affects the speciation of redox-sensitive radionuclides hence the results in Duro et al. (2012) is used in the radionuclide transport calculations. In one of the residual calculation cases changed repository redox conditions are considered.

### ***Data used***

See Source of data.

## 2.19 AMF Number 208

---

Output from AMF activity	Input to AMF activity
Initial state – Waste	Concrete degradation due to sulphate attack

---

**Dataset**  
Sodium sulphate, Monosulphate and Katoite amounts in waste

---

### 2.19.1 Sodium sulphate, mono sulphate and Katoite amounts in waste

#### **Short description of data**

Some waste types, e.g. the bitumen conditioned ion-exchange resins F.17, contains evaporator concentrates and these concentrates contains a significant amount of highly soluble salts. Sodium sulphate may be released from the salts and potentially affect adjacent cement waste matrices and concrete packaging in the repository through the formation of the expanding mineral ettringite.

#### **Source of data**

The dataset contains the amount of sodium sulphate in evaporate concentrates in the waste packages in the compartments containing F.17 in 1BMA and the content of Katoite (C3AH6) and mono sulphate in cement and concrete. The data are taken from the inventory of evaporate concentrates (SKB 2013a, Table E24-2), amounts of cement and concrete in the compartments containing F.17 in 1BMA given in the **Initial state report** (Table A-3), and the composition of the evaporate concentrates given in SKBdoc 1417785.

#### **Used in model or assessment activity**

The dataset is used in an assessment of concrete degradation due to sulphate attack. The assessment is further described in the **Main report** (Chapter 6, Chemical evolution of the waste domain and Evolution of engineered barriers).

#### **Data used**

The data used on the inventory of cement and evaporate concentrate in the compartments containing the waste type F.17 in 1BMA are given in the **Main report** (Table 6-2).



## 3 Near-field excluding waste

### 3.1 AMF Number 25

---

Output from AMF activity	Input to AMF activity
Seismic load	Mechanical degradation of concrete due to load

---

**Dataset**  
Possibility of concrete degradation due to seismic activity

---

#### 3.1.1 Possibility of concrete degradation due to seismic activity

##### **Short description of data**

Data here is an assessment of the possibility of the concrete barriers and structures, mainly in the Silo vault, being damaged by seismic activity.

##### **Source of data**

The assessment is performed in Georgiev (2013).

##### **Used in model or assessment activity**

The assessment is used as supporting data in the reference evolution of the repository, see the **Main report** (Chapter 6).

##### **Data used**

The assessment presented in Georgiev (2013) gives a probability for damaging the concrete barriers and structures.

### 3.2 AMF Number 33

---

Output from AMF activity	Input to AMF activity
Initial state – Concrete barriers	Production of gas

---

**Dataset**  
Amounts and dimensions of steel in each waste vault

---

#### 3.2.1 Amounts and dimensions of steel in each waste vault

##### **Short description of data**

The dataset contains amounts and dimensions of steel found in the concrete barriers such as reinforcement in concrete structures.

##### **Source of data**

In Moreno and Neretnieks (2013, Appendix A) references are given to where the datasets are taken from.

##### **Used in model or assessment activity**

The datasets are used in the calculations of gas formation in SFR due to metal corrosion. This is further described in Moreno and Neretnieks (2013, Appendix A, Section 2).

##### **Data used**

See Source of data.

### 3.3 AMF Number 35

---

<b>Output from AMF activity</b> Mechanical degradation of concrete due to load	<b>Input to AMF activity</b> Evolution of concrete barriers
---	--

---

**Dataset**  
Assessment of the impact of mechanical processes on the concrete during the assessment time-period

---

#### 3.3.1 Assessment of the impact of mechanical processes on the concrete during the assessment time-period

##### **Short description of data**

This assessment compiles the information from investigations regarding Bitumen swelling (AMF 150, Section 3.29), Seismic Load (AMF 25, Section 3.1) and Rock Fallout and EDZ (AMF 26, Section 4.13) to give a general assessment regarding the influence of mechanical processes on the concrete barriers and structures during the assessment time-period.

##### **Source of data**

The sources of data are given in sections above.

##### **Used in model or assessment activity**

The general assessment is used in describing the reference evolution of the concrete barriers and structures in the **Main report** (Chapter 6).

##### **Data used**

See Source of data.

### 3.4 AMF Number 36

---

<b>Output from AMF activity</b> Freezing of concrete	<b>Input to AMF activity</b> Evolution of concrete barriers
---	--

---

**Dataset**  
Concrete freezing temperature

---

#### 3.4.1 Concrete freezing temperature

##### **Short description of data**

In concrete with pores completely filled with water, internal freezing may cause penetrating macro-cracks resulting in serious structural deterioration of the concrete so that it cannot be considered to be intact after freezing and thawing.

##### **Source of data**

The freezing temperature of the concrete in SFR is based on the results of an experimental study of the freezing properties of existing concrete in 1BMA (Thorsell 2013).

##### **Used in model or assessment activity**

The freezing temperature of the concrete in SFR is used in the assessment of the future evolution of the concrete barriers in SFR.

##### **Data used**

See Source of data.

## 3.5 AMF Number 38

---

Output from AMF activity	Input to AMF activity
Rebar corrosion and chemical degradation of concrete	Evolution of concrete barriers

---

**Dataset**  
Assessment of the impact of chemical processes on the concrete during the assessment time-period

---

### 3.5.1 Assessment of the impact of chemical processes on the concrete during the assessment time-period

#### **Short description of data**

This assessment investigates the impact of chemical processes on the concrete barriers and structures, as well as on the rebar irons in the concrete, during the assessment time-period.

#### **Source of data**

The assessment is performed in Höglund (2014).

#### **Used in model or assessment activity**

The assessment conclusions are used both when describing the future evolution of the concrete in the repository (**Main report**, Chapter 6), when selecting concrete hydraulic properties in the near-field hydraulic modelling (Abarca et al. 2013), and when selecting concrete diffusion properties in the radionuclide transport modelling (**Radionuclide transport report**).

#### **Data used**

See conclusions in Höglund (2014).

## 3.6 AMF Number 41

---

Output from AMF activity	Input to AMF activity
Freezing of bentonite	Evolution of bentonite barrier and plug

---

**Dataset**  
Assessment of the consequences on ice lens formation in the Silo

---

### 3.6.1 Assessment of the consequences on ice lens formation in the Silo

#### **Short description of data**

This is an assessment of the possible consequences of an ice lens forming in the bentonite barrier in the Silo.

#### **Source of data**

The assessment is reported in Birgersson and Andersson (2014).

#### **Used in model or assessment activity**

The assessment is used as supporting data in when describing the reference evolution of the bentonite barriers in the **Main report** (Chapter 6).

#### **Data used**

See Birgersson and Andersson (2014, Section 4.1).

## 3.7 AMF Number 44

---

<b>Output from AMF activity</b> Initial state – Bentonite barrier and plug	<b>Input to AMF activity</b> Evolution of bentonite barrier and plug
---	---

---

**Dataset**  
Silo vault and waste dimensions

---

### 3.7.1 Silo vault and waste dimensions

#### **Short description of data**

The dataset contains dimensions of the Silo vault, the Silo structure and the waste packages within the Silo.

#### **Source of data**

The data are derived from the **Initial state report** (Appendix A).

#### **Used in model or assessment activity**

The dimensions are used in a modelling study of several different H-M-processes in the Silo bentonite and sand/bentonite barriers (Börgesson et al. 2014)

#### **Data used**

See Börgesson et al. (2014, Appendix B).

## 3.8 AMF Number 45

---

<b>Output from AMF activity</b> Evolution of concrete barriers	<b>Input to AMF activity</b> Near-field hydrology
---	--

---

**Dataset**  
The physical porosities of concrete materials used in SFR.  
The hydraulic conductivities of the installed concrete/cement types present in SFR.

---

### 3.8.1 The physical porosities of the concrete materials used in SFR

#### **Short description of data**

The physical porosity is a measurement of the volume of void (m<sup>3</sup>) per volume (m<sup>3</sup>) of mass. It affects transport processes through the barriers.

#### **Source of data**

The data are qualified in the **Data report** (Chapter 10) and given in Table 10-4 (called Total Porosity) in the report.

#### **Used in model or assessment activity**

The data are used in the modelling of the near-field hydrology to calculate the groundwater flow through different components (Abarca et al. 2013).

#### **Data used**

See Source of data.

### 3.8.2 The hydraulic conductivities of the installed concrete/cement types present in SFR

#### **Short description of data**

The hydraulic conductivity (m/s) of a material is a property which describes the ease with which water can flow through it, through pore spaces and fractures.

#### **Source of data**

The data are qualified in the **Data report** (Chapter 10) and given in Table 10-4 in the report.

#### **Used in model or assessment activity**

The hydraulic conductivities are used in the modelling of the near-field hydrology to calculate the groundwater flow through different components (Abarca et al. 2013).

#### **Data used**

See Source of data.

## 3.9 AMF Number 46

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Evolution of bentonite barrier and plug	Near-field hydrology
<b>Dataset</b>	
The physical porosities of bentonite barrier and plug materials	
The hydraulic conductivities of bentonite barrier and plug materials	

### 3.9.1 The physical porosities of bentonite barrier and plug materials

#### **Short description of data**

The physical porosity is a measurement of the volume of void ( $m^3$ ) per volume ( $m^3$ ) of mass. It affects transport processes in and through the barriers.

#### **Source of data**

Physical porosities for bentonite and other plug materials are given in the **Initial state report** (Section 12.5) as well as in Börgesson et al. (2014).

#### **Used in model or assessment activity**

Here, the porosities are used to assess barrier saturation (Börgesson et al. 2014).

#### **Data used**

See Source of data.

### 3.9.2 The hydraulic conductivities of bentonite barrier and plug materials

#### **Short description of data**

The hydraulic conductivity (m/s) of a material is a property that describes the ease with which water can flow through it.

### **Source of data**

Hydraulic conductivities for bentonite and plug materials are given in the **Initial state report** (Section 12.5) as well as in Börgesson et al. (2014).

### **Used in model or assessment activity**

The data are used to calculate the groundwater flow in the repository near-field as function of the hydraulic properties of the bentonite barriers and plugs (Abarca et al. 2013). The data are further used to assess barrier saturation (Börgesson et al. 2014).

### **Data used**

See Source of data.

## **3.10 AMF Number 49**

---

<b>Output from AMF activity</b> Evolution of repository redox	<b>Input to AMF activity</b> Non-flow related RN transport properties
--	--

---

<b>Dataset</b> Redox conditions
------------------------------------

---

### **3.10.1 Redox conditions**

#### **Short description of data**

The data describes the redox-conditions in SFR1 due to corrosion/degradation of materials present in the repository. The derived redox conditions come from thermodynamic modelling of the corrosion/degradation processes. The influence of penetrating oxidants, oxygen, due to intrusion of glacial melt water is modelled.

#### **Source of data**

The results from the modelling of the redox conditions are found in Duro et al. (2012, Chapter 6). The results are displayed as reductive capacity (RDC) which is the amount of electrons available. A positive amount means reducing conditions.

#### **Used in model or assessment activity**

The results are used when deriving  $K_d$ -values for redox-sensitive elements. Reduced species are used in the main scenario and oxidised species are used in the Changed repository redox conditions scenario.

#### **Data used**

See Source of data.

### 3.11 AMF Number 50

---

<b>Output from AMF activity</b> Near-field hydrology	<b>Input to AMF activity</b> RN transport in water phase
---	---

---

**Dataset**  
Water flows and flow directions (x, y, z) for each vault and concrete degradation state during relevant time steps.

---

#### 3.11.1 Water flows and flow directions (x, y, z) for each vault and concrete degradation state during relevant time steps.

##### **Short description of data**

The hydrological dataset contains water fluxes across surfaces of control volumes specified for the waste vault. Further description of the data can be found in the **Radionuclide transport report** (Appendix A) and in Abarca et al. (2013, Section 3.3).

##### **Source of data**

The data were assembled from near-field hydrology calculations performed by Abarca et al. (2013).

##### **Used in model or assessment activity**

The data are used for the radionuclide transport calculations in the Near-field.

##### **Data used**

The raw-data delivered from the hydrological calculations as well as the data pre-processed for use in the radionuclide transport calculations are stored in a subversion repository hosted at SKB.

The releases for each degradation state and vault can be found at a location like:

svn://svn.skb.se/kalkyl/SFR/SR-PSU/Indata/Release2Biosphere/[CC]/[MODEL].ear

svn://svn.skb.se/projekt/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/[MODEL]/Water fluxes (AMF 50)/[MODEL]\_WaterFluxes\_[DEG\_STATE].xlsx

Where:

[DEG\_STATE]: is the concrete degradation state (see Abarca et al. 2013).

[MODEL]: is the name of the model for each repository, i.e. one of {BLA1, BLA2, BLA3, BLA4, BLA5, BMA1, BMA2, BRT, BTF1, BTF2, Silo} (With an exception for the data for 2–5BLA which are stored in the same directory)

### 3.12 AMF Number 51

---

<b>Output from AMF activity</b> Evolution of repository pH	<b>Input to AMF activity</b> Geochemical evolution
---	---

---

**Dataset**  
Speciation of fresh concrete porewater

---

#### 3.12.1 Speciation of fresh concrete porewater

##### **Short description of data**

The dataset describes the speciation of the concrete porewater that exist in the repository.

##### **Source of data**

The speciation is modelled and presented in Cronstrand (2014).

### ***Used in model or assessment activity***

The speciation is used when assessing the possibility of repository water influencing (see also AMF number 109, Section 3.20) the chemical composition of the groundwater surrounding the repository, see the **Main report** (Chapter 6).

### ***Data used***

See Source of data.

## **3.13 AMF Number 61**

---

### **Output from AMF activity**

Evolution of concrete barriers

### **Input to AMF activity**

Non-flow related RN transport properties

---

### **Dataset**

Assessment regarding state of the concrete barriers during assessment time-period

---

### **3.13.1 Assessment regarding the state of concrete barriers during assessment time-period**

#### ***Short description of data***

An assessment that describes the states of mechanical and chemical condition the concrete barriers and structures will be during the assessment time-period.

#### ***Source of data***

The assessment is performed in the reference evolution, **Main report** (Chapter 6).

### ***Used in model or assessment activity***

The assessment is used as supporting data when selecting sorption partitioning coefficients and effective diffusion constants for the concrete materials in the repository (**Data report**, Chapters 7 and 9).

### ***Data used***

See Source of data.

## **3.14 AMF Number 63**

---

### **Output from AMF activity**

Evolution of bentonite barrier and plug

### **Input to AMF activity**

Non-flow related RN transport properties

---

### **Dataset**

Assessment regarding state of the bentonite barriers and plugs during assessment time-period

---

### **3.14.1 Assessment regarding state of the bentonite barriers and plugs during assessment time-period**

#### ***Short description of data***

An assessment that describes the states of mechanical and chemical condition of bentonite barriers and plugs during the assessment time-period.

### **Source of data**

The reference evolution is reported in the **Main report** (Chapter 6).

### **Used in model or assessment activity**

The assessment is used when selecting sorption partitioning coefficients and effective diffusion constants for the bentonite materials in the repository (**Data report**, Chapter 7).

### **Data used**

See Source of data.

## **3.15 AMF Number 75**

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Non-flow related RN transport properties	RN transport in water phase
<b>Dataset</b>	
Sorption partitioning constants for the different materials present in the repository	
Effective diffusivities for the different materials present in the repository	
Diffusion available porosities of the different materials present in the repository	
Densities of the different materials present in the repository	

### **3.15.1 Sorption partitioning constants for the different materials present in the repository**

#### **Short description of data**

The data are sorption partitioning constants,  $K_d$ , in  $m^3/kg$  for the concrete, bentonite and gravel materials present in the repository. The constants are time dependent due to changes in degradation states of the materials and changes in pH for some repository vaults. The concrete datasets are also variable dependent on the amount of cement present in the concrete, see the **Data report** (Chapter 7).

#### **Source of data**

The datasets are presented, qualified in the **Data report** (Chapters 7 and 8).

#### **Used in model or assessment activity**

Sorption partitioning constants are used in the radionuclide transport calculations, see the **Radionuclide transport report**.

#### **Data used**

The data used are stored in the files listed below:

1BLA: no sorption

2–5BLA: no sorption

#### **Concrete**

[svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/NearfieldKd\(AMF75\).xlsx](svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/NearfieldKd(AMF75).xlsx)

1BMA:

[svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA1/BMA1\\_KdFactor\(AMF75\).xlsx](svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA1/BMA1_KdFactor(AMF75).xlsx)

[svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA1/BMA1\\_KdSelector\(AMF75\).xlsx](svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA1/BMA1_KdSelector(AMF75).xlsx)

2BMA:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA2/BMA2\_  
KdFactor(AMF75).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA2/BMA2\_  
KdSelector (AMF75).xlsx

1BTF:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF1/BTF1\_  
KdFactor(AMF75).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF1/BTF1\_  
KdSelector(AMF75).xlsx

2BTF:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF2/BTF2\_  
KdFactor(AMF75).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF2/BTF2\_  
KdSelector(AMF75).xlsx

BRT:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BRT/BRT\_  
KdFactor(AMF75).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BRT/BRT\_  
KdSelector(AMF75).xlsx

Silo:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/Silo/Silo\_  
KdFactor(AMF75).xlsx

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/Silo/Silo\_  
KdSelector(AMF75).xlsx

Cement portion of the different concretes and waste matrices:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/  
MixingFractions(AMF75).xlsx

### **Bentonite materials**

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/NearfieldKd(AMF75).  
xlsx

### **Sand/Gravel**

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/  
NearfieldKdGravel(AMF75).xlsx

## **3.15.2 Effective diffusivities for the different materials present in the repository**

### ***Short description of data***

Effective diffusivities are given for the different concrete, bentonite, and gravel materials in the repository. Diffusivities for concrete and grout are time dependent to reflect the degradation of the materials.

### ***Source of data***

The datasets for concrete and for bentonite materials are qualified in the **Data report** (Chapters 7 and 9). Diffusivities for other materials are taken from the SAFE project (SKB 2001).

### ***Used in model or assessment activity***

Effective diffusivities are used in the radionuclide transport calculations, see the **Radionuclide transport report**.

#### ***Data used***

##### **Concrete**

1BLA:

svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BLA1/BLA1\_De(AMF75).xlsx

2–5BLA:

svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BLA1/BLA1\_De(AMF75).xlsx

1BMA:

svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA1/BMA1\_De(AMF75).xlsx

2BMA:

svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA2/BMA2\_De(AMF75).xlsx

1BTF:

svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF1/BTF1\_De(AMF75).xlsx

2BTF:

svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF2/BTF2\_De(AMF75).xlsx

Silo:

svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/Silo/Silo\_De(AMF75).xlsx

##### **Other materials**

svn.skf.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/NearfieldDe(AMF75).xlsx

### **3.15.3 Diffusion available porosities of the different materials present in the repository**

#### ***Short description of data***

Diffusion available porosities are given for the different materials in the repository. The porosities for concrete materials are time dependent to reflect degradation.

#### ***Source of data***

The datasets for concrete and for bentonite materials are qualified in the **Data report** (Chapter 7 for bentonite and Chapter 10 for concrete materials as Total Porosity). Porosities for other materials are taken from the SAFE project (SKB 2001) and presented in the **Initial state report**.

### ***Used in model or assessment activity***

The diffusion available porosities are used in the radionuclide transport calculations, see the **Radionuclide transport report**.

## **Data used**

### **Concrete**

1BLA:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BLA1/BLA1\_ConcretePorosity(AMF75).xlsx

2–5BLA:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BLA1/BLA1\_ConcretePorosity(AMF75).xlsx

1BMA:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA1/BMA1\_ConcretePorosity(AMF75).xlsx

2BMA:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA2/BMA2\_ConcretePorosity(AMF75).xlsx

1BTF:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF1/BTF1\_ConcretePorosity(AMF75).xlsx

2BTF:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF2/BTF2\_ConcretePorosity(AMF75).xlsx

Silo:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/Silo/Silo\_ConcretePorosity(AMF75).xlsx

### **Other materials**

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/NearfieldPorosity(AMF75).xlsx

## **3.15.4 Densities of the different materials present in the repository**

### **Short description of data**

Densities are given for the different materials in the repository.

### **Source of data**

Densities correspond to those used in the SAFE safety assessment (SKB 2001).

### **Used in model or assessment activity**

Densities are used in the radionuclide transport calculations, see the **Radionuclide transport report**.

### **Data used**

The used data are stored in the file:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/NearfieldRho(AMF75).xlsx

## 3.16 AMF Number 76

---

<b>Output from AMF activity</b> RN transport in water phase	<b>Input to AMF activity</b> RN transport in water phase (Geosphere)
<b>Dataset</b> Radionuclide release from the near-field to the geosphere	

---

### 3.16.1 Radionuclide release from the near-field to the geosphere

#### **Short description of data**

Data consists of the release of radionuclides released from the waste vaults and into the geosphere.

#### **Source of data**

Radionuclide transport calculations for the near-field, see the **Radionuclide transport report** for details.

#### **Used in model or assessment activity**

The data are used as input to the calculations of radionuclide transport in the geosphere.

#### **Data used**

The data used are saved in the same files as the corresponding releases from geosphere to biosphere, see Section 4.10.1.

## 3.17 AMF Number 85

---

<b>Output from AMF activity</b> Initial state – Concrete barriers	<b>Input to AMF activity</b> RN transport in water phase
<b>Dataset</b> Dimensions of concrete barriers in Silo, BMA, BRT and BTF vaults	

---

### 3.17.1 Dimensions of concrete barriers in Silo, BMA, BRT and BTF vaults

#### **Short description of data**

The dataset contain dimensions (height and width) of the different concrete barriers present in the Silo, the BMA, the BRT and the BTF waste vaults.

#### **Source of data**

Data are taken from the **Initial state report** (Tables 4-1, 5-1, 6-1, 6-2, 7-3, 8-1, 9-1 and 10-1).

#### **Used in model or assessment activity**

The dimensions are used in the **Radionuclide transport report** to calculate the release of radionuclides from the SFR repositories.

#### **Data used**

Data are stored in the following files:

1BLA:

svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BLA1/BLA1\_Dimensions(AMF85).xlsx

2-5BLA:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BLA2-5/BLA2-5\_Dimensions(AMF85).xlsx

1BMA:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA1/BMA1\_Dimensions(AMF85).xlsx

2BMA:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BMA2/BMA2\_Dimensions(AMF85).xlsx

BRT:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BRT/BRT\_Dimensions(AMF85).xlsx

1BTF:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF1/BTF1\_Dimensions(AMF85).xlsx

2BTF:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/BTF2/BTF2\_Dimensions(AMF85).xlsx

### 3.18 AMF Number 100

---

**Output from AMF activity**

Initial state – Bentonite barriers

**Input to AMF activity**

RN transport in water phase

---

**Dataset**

Dimensions of bentonite and bentonite/sand barriers in Silo

---

#### 3.18.1 Dimensions of bentonite and bentonite/sand barriers in Silo.

**Short description of data**

The dataset contain dimensions (height, width and radius) of the different bentonite barriers in the silo.

**Source of data**

The data are taken from the **Initial state report** (Table 7-3).

**Used in model or assessment activity**

The dimensions are used in the **Radionuclide transport report** to calculate the release of radionuclides from the Silo repository.

**Data used**

Data are stored in the following file:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Near-field/Indata/Ecolego/Silo/Silo\_Dimensions(AMF85).xlsx

### 3.19 AMF Number 104

---

<b>Output from AMF activity</b> Near-field hydrology	<b>Input to AMF activity</b> Non-flow related RN transport properties
---	--

---

**Dataset**  
Assessment of the impact of the repository water flow on sorption and diffusion

---

#### 3.19.1 Assessment of the impact of the repository water flow on sorption processes

##### **Short description of data**

This assessment regards the impact of the water flows through the repository barriers and waste packages on the sorption processes.

##### **Source of data**

The assessment is performed in the **Main report** (Chapter 6) with supporting data taken from Abarca et al. (2013).

##### **Used in model or assessment activity**

The assessment is used as support when selecting sorption partitioning constants (**Data report** Chapters 7 and 8) for use in the **Radionuclide transport report**.

##### **Data used**

See Source of data.

### 3.20 AMF Number 109

---

<b>Output from AMF activity</b> Near-field hydrology	<b>Input to AMF activity</b> Geochemical evolution
---	---

---

**Dataset**  
Outflow of water from the repository

---

#### 3.20.1 Outflow of water from the repository

##### **Short description of data**

The dataset is an estimate of the amount of repository water flowing into the surrounding geosphere.

##### **Source of data**

The estimate is taken from Abarca et al. (2013).

##### **Used in model or assessment activity**

The estimate is used together with an estimate of concrete porewater speciation (see AMF Number 51, Section 3.12) to assess the impact of repository water on the geochemical evolution in the surrounding geosphere.

##### **Data used**

See Source of data.

## 3.21 AMF Number 113

---

**Output from AMF activity**

Initial state – Backfill

**Input to AMF activity**

Hydrogeology

---

**Dataset**

Backfill hydraulic conductivity

---

### 3.21.1 Backfill hydraulic conductivity

**Short description of data**

The dataset describes the hydraulic conductivity of the backfill used in the SFR repository.

**Source of data**

Data are taken from SKBdoc 1358612.

**Used in model or assessment activity**

The conductivity is used in the regional hydrogeological model when assessing the regional hydraulic gradient surrounding the repository (Odén et al. 2014).

**Data used**

See Source of data.

## 3.22 AMF Number 116

---

**Output from AMF activity**

Layout Underground Openings

**Input to AMF activity**

Hydrogeology

---

**Dataset**

Geometries of SFR 1 and SFR 3 repositories

---

### 3.22.1 Geometries of SFR 1 and SFR 3 repositories

**Short description of data**

The data consists of CAD-files describing the geometries of the different parts of the repository. The files use the RT90 coordinate system.

**Source of data**

The original data are taken from the **Initial state report** (Chapter 11).

**Used in model or assessment activity**

The geometries are used in the regional hydrogeological model when assessing the regional hydraulic gradient surrounding the repository (Odén et al. 2014).

**Data used**

The geometry files are stored in the following SKBdoc documents:

- SFR1 geometries (SKBdoc 1373072)<sup>4</sup>
- SFR3 geometries (SKBdoc 1372987)<sup>5</sup>

---

<sup>4</sup> Internal document, Svensk Kärnbränslehantering AB.

<sup>5</sup> Internal document, Svensk Kärnbränslehantering AB.

### 3.23 AMF Number 121

---

<b>Output from AMF activity</b> Evolution of repository pH	<b>Input to AMF activity</b> Corrosion of reactor pressure vessels
---	---

---

**Dataset**  
pH evolution in BRT vault during assessment time-period

---

#### 3.23.1 pH evolution in BRT vault during assessment time-period

##### **Short description of data**

The dataset represents an assessment of the evolution of pH in the BRT waste vault.

##### **Source of data**

The assessment is described in Cronstrand (2014).

##### **Used in model or assessment activity**

The assessment is used when selecting corrosion rates (see AMF Number 120, Section 2.8) that govern the release of radionuclides from the reactor pressure vessels in the BRT vault.

##### **Data used**

See Source of data.

### 3.24 AMF Number 127

---

<b>Output from AMF activity</b> Initial state – Repository layout	<b>Input to AMF activity</b> Near-field hydrology
--	--

---

**Dataset**  
Geometries of SFR 1 and SFR 3 in RT90 coordinate system.

---

#### 3.24.1 Geometries of SFR 1 and SFR 3 repositories

##### **Short description of data**

The data consists of CAD-files describing the geometries of the different parts of the repository. The files use the RT90 coordinate system.

##### **Source of data**

The original data are taken from the **Initial state report** (Chapter 11).

##### **Used in model or assessment activity**

CAD data was imported and used as geometry input for assessment of the near-field hydrology calculations. The geometry data are further described in Abarca et al. (2013, Section 3.1).

##### **Data used**

The used data are stored in SKBdoc documents (1428528, 1428206, 1428207 and 1428208)<sup>6</sup>.

---

<sup>6</sup> Internal document, Svensk Kärnbränslehantering AB.

## 3.25 AMF Number 132

---

**Output from AMF activity**

Initial state – Concrete barriers

**Input to AMF activity**

Concentration of complexing agents

---

**Dataset**

Amounts of hydrated cement present in construction concrete and grout  
Pore and void volume in vaults

---

### 3.25.1 Amounts of hydrated cement present in construction concrete and grout

#### *Short description of data*

The dataset contains the estimated amounts of hydrated cement present in construction concrete and grout in whole vaults but estimates are also given for smaller units e.g. compartments in 1BMA and caissons in 2BMA.

#### *Source of data*

The amounts in (kg) are given in Keith-Roach et al. (2014, Table B-4) and are based on information given in the **Initial state report** (Appendix A).

#### *Used in model or assessment activity*

The amounts of hydrated cement are used for calculating how much of the complexing agents that will sorb and therefore not add to the complexing agents' concentration in the vaults. The calculations are further described in Keith-Roach et al. (2014).

#### *Data used*

See Source of data.

### 3.25.2 Pore and void volume in vaults

#### *Short description of data*

The dataset contains the estimated pore and void volume (m<sup>3</sup>) in whole vaults but estimates are also given for smaller units e.g. compartments in 1BMA and caissons in 2BMA.

#### *Source of data*

The pore and void volumes are given in Keith-Roach et al. (2014, Table B-4) and are based on information given in the **Initial state report** (Appendix A).

#### *Used in model or assessment activity*

The pore and void volumes are used in the calculations of the concentration of complexing agents' in the waste vaults. The calculations are further described in Keith-Roach et al. (2014).

#### *Data used*

See Source of data.

## 3.26 AMF Number 133

Output from AMF activity	Input to AMF activity
Evolution of repository pH	Microbial activity
<b>Dataset</b>	
pH evolution in vaults during assessment time-period	

### 3.26.1 pH evolution in vaults during assessment time-period

#### **Short description of data**

The pH in the engineered barriers and the waste will change over time due to leaching of concrete minerals. This is assessed in Cronstrand (2014) and further evaluated in the **Main report** (Chapter 7).

#### **Source of data**

The data are given in Cronstrand (2014, Table 5-1) and further evaluated in the **Main report** (Chapter 7).

#### **Used in model or assessment activity**

The data are used to evaluate the abundance of microbial activity in the waste and engineered barriers, see the **Main report** (Chapter 6).

#### **Data used**

See Source of data.

## 3.27 AMF Number 140

Output from AMF activity	Input to AMF activity
Freezing of concrete study	Freezing of concrete
<b>Dataset</b>	
Subzero temperature at which concrete disintegrates	

### 3.27.1 Subzero temperature at which concrete disintegrates.

#### **Short description of data**

The data originate from an experimental study regarding the consequences on concrete due of freezing. The study suggests that concrete will fracture at temperatures somewhere between  $-3^{\circ}\text{C}$  to  $-10^{\circ}\text{C}$ .

#### **Source of data**

The data are presented in Thorsell (2013, Table 3-2).

#### **Used in models, assessments, scenarios, and calculation cases**

The results are used to assess when in time the concrete in the repository can be expected to have lost its hydraulic resistance. This is used in the radionuclide transport calculations main scenario, see the **Radionuclide transport report**.

#### **Data used**

See Source of data.

## 3.28 AMF Number 146

---

<b>Output from AMF activity</b> Generic concrete porewater composition	<b>Input to AMF activity</b> Non-flow related transport properties
---	---

---

**Dataset**  
Concrete porewater composition

---

### 3.28.1 Concrete porewater composition

#### **Short description of data**

The dataset contains a chemical composition of concrete porewater. The dataset is described as generic as the SFR specific composition presented by Cronstrand (2014) was not ready when this dataset was used. Therefore a generic composition was assumed.

#### **Source of data**

The composition is assumed in Crawford (2013, Section 4.2.1).

#### **Used in model or assessment activity**

The composition is used in the same report (Crawford 2013) when assessing the possibility of a high pH plume affecting the sorption partitioning constants used for the geosphere radionuclide transport calculations.

#### **Data used**

See Source of data.

## 3.29 AMF Number 150

---

<b>Output from AMF activity</b> Bitumen swelling assessment	<b>Input to AMF activity</b> Mechanical degradation of concrete due to load
--	--

---

**Dataset**  
Grouting assessment for bitumen containing waste packages

---

### 3.29.1 Grouting assessment for bitumen containing waste packages

#### **Short description of data**

The assessment regards the possibility to grout around the waste packages containing evaporator concentrates moulded in bitumen in the 1BMA and Silo repositories.

#### **Source of data**

The assessment is performed using the software COMSOL Multiphysics (see the **Model summary report**) to test the 1BMA and Silo structural strength (von Schenck and Bultmark 2014).

#### **Used in models, assessments, scenarios, and calculation cases**

The conclusion of this assessment is used when describing the reference evolution of the engineered barriers in the **Main report** (Chapter 6).

#### **Data used**

See the conclusions in von Schenck and Bultmark (2014).

### 3.30 AMF Number 151

---

Output from AMF activity	Input to AMF activity
Initial state – Concrete barriers	Bitumen swelling assessment

---

**Dataset**  
Allocation of bitumen conditioned waste packages in 1BMA  
Structural strength data for Silo structural concrete and grout  
Structural strength data for 1BMA structural concrete, grout, and floor gravel

---

#### 3.30.1 Allocation of bitumen conditioned waste packages in 1BMA

##### **Short description of data**

The dataset contains the planned locations of waste packages B05, B05:2, F05, F17, F15, F99 and R01 in the 1BMA compartments.

##### **Source of data**

The allocation data are given in the **Initial state report** (Table 3-13).

##### **Used in model or assessment activity**

The data are used in an assessment to estimate possible structural damages on the 1BMA and Silo structures due to swelling waste packages. The assessment is further described in von Schenck and Bultmark (2014).

##### **Data used**

See Source of data.

#### 3.30.2 Structural strength data for Silo structural concrete and grout

##### **Short description of data**

The dataset contains material strength properties for the structural concrete used in the Silo and the presumed grouting around the waste packages.

##### **Source of data**

The data are taken from SKBdoc 1209128<sup>7</sup>, Noguchi et al. (2009) and Boverket (2004).

##### **Used in models, assessments, scenarios, and calculation cases**

The data are used in an assessment to estimate possible structural damages on the 1BMA and Silo structures due to bitumen swelling waste packages. The assessment is further described in von Schenck and Bultmark (2014).

##### **Data used**

See von Schenck and Bultmark (2014, Tables 1-1 and 1-2).

#### 3.30.3 Structural strength data for 1BMA structural concrete, grout and floor gravel

##### **Short description of data**

The dataset contains material strength properties for the structural concrete used in the 1BMA, the presumed grouting around the waste packages, and the gravel beneath the 1BMA concrete floor.

---

<sup>7</sup> Internal document, Svensk Kärnbränslehantering AB.

### **Source of data**

The data are taken from Noguchi et al. (2009) and Boverket (2004), and reproduced in the **Initial state report**.

### **Used in models, assessments, scenarios, and calculation cases**

The data are used in an assessment to estimate possible structural damages on the 1BMA and Silo structures due to bitumen swelling waste packages. The assessment is further described in von Schenck and Bultmark (2014).

### **Data used**

See von Schenck and Bultmark (2014, Tables 1-1 and 1-2).

## **3.31 AMF Number 152**

---

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Initial state – Concrete barriers	Rebar corrosion and chemical degradation of concrete

---

**Dataset**

Geometry of vaults, backfill and concrete barriers  
Hydraulic conductivities of backfill and concrete barriers  
Physical porosities of backfill and concrete barriers

---

### **3.31.1 Geometries of the 1BMA and 2BMA vaults, backfill and concrete barriers**

#### **Short description of data**

The dimensions (length, height and width) of the different vaults and the concrete barriers present in the 1BMA and 2BMA repository vaults.

#### **Source of data**

The 1BMA and 2BMA layouts are derived from the **Initial state report** (Tables 4-1 and 5-1).

#### **Used in models, assessments, scenarios, and calculation cases**

The dimensions are used in the assessment of the impact of corrosion of reinforcing bars and other embedded steel components on the integrity of the concrete barriers, as well as in the modelling of the chemical degradation of concrete barriers in the 1BMA and 2BMA vault (Höglund 2014).

#### **Data used**

See Source of data.

### **3.31.2 Hydraulic conductivities of backfill and concrete barriers**

#### **Short description of data**

Hydraulic conductivity is a material property that describes the ease in which water can pass through the material.

#### **Source of data**

The hydraulic conductivities for macadam backfill and the concrete barriers are taken from Höglund (2014).

**Used in models, assessments, scenarios, and calculation cases**

The hydraulic conductivities are used for calculation of the water flow rates and the flow distribution between macadam backfill and different concrete barriers in the 1BMA and 2 BMA vaults, further described in Höglund (2014).

**Data used**

See Source of data.

**3.31.3 Physical porosities of backfill and concrete barriers**

**Short description of data**

The physical porosity parameter is a material property giving the amount of void space in a cubic meter of the material, shortened to (-).

**Source of data**

The physical porosities for concrete and cement are taken from Höglund (2014, Tables 7-5 and 7-7)

**Used in models, assessments, scenarios, and calculation cases**

The physical porosities are used for calculation of the water flow rates in the macadam backfill and different concrete barriers in the 1BMA and 2BMA vaults, further described in Höglund (2014).

**Data used**

See Source of data.

**3.32 AMF Number 153**

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Near-field hydrogeology	Rebar corrosion and chemical degradation of concrete
<b>Dataset</b>	
Total water flows and water flow patterns within the vaults, backfill and the concrete barriers	

**3.32.1 Water flow and flow patterns within the vaults, backfill and concrete barriers**

**Short description of data**

The dataset contains calculated water flows through the 1BMA and 2BMA vaults in throughout the assessment period.

**Source of data**

The data are taken from the following sources:

- Water flow in the 1BMA: Höglund (2014, Figures 7-7 and 7-12, and Table 7-7), based on the hydrogeological modelling performed in the SAFE safety assessment (Holmén and Stigsson 2001).
- Water flow in the 2BMA: Höglund (2014, Figure 7-7 and Table 7-6), based on hydrogeological modelling presented by Abarca et al. (2013).

### **Used in models, assessments, scenarios, and calculation cases**

The water flow into the vault are used for calculation of the water flow rates and the flow distribution between macadam backfill and different concrete barriers in the 1BMA and 2BMA vaults, further described in Höglund (2014).

#### **Data used**

See Source of data.

## **3.33 AMF Number 157**

---

#### **Output from AMF activity**

Bentonite and concrete material properties

#### **Input to AMF activity**

RN transport due to gas pressure

---

#### **Dataset**

Effective diffusivities  
Physical porosities  
Particle densities  
Hydraulic conductivities  
Concrete/Cement Sorption distribution coefficients

---

### **3.33.1 Effective diffusivities**

#### **Short description of data**

Effective diffusivity is a material property which describes the ease for gases and dissolved species to diffuse through the material media.

#### **Source of data**

The effective diffusivity for concrete and cement is taken from the **Data report** (Table 9-5) where the data are also qualified. The other diffusivities are taken from the SAFE data report for the radionuclide transport calculations (SKB 2001).

#### **Used in model or assessment activity**

The effective diffusivities are used for assessing gas driven transport of radionuclides, further described in Moreno and Neretnieks (2013).

#### **Data used**

See Source of data.

### **3.33.2 Physical porosities**

#### **Short description of data**

The physical porosity parameter is a material property giving the amount of void space in a cubic metre of the material, which is shortened to (-).

#### **Source of data**

The physical porosity for concrete and cement is taken from the **Data report** (Table 10-4, column Total Porosity) where the data are also qualified. The other porosities are taken from the compilation of data for the SAFE radionuclide transport calculations (SKB 2001).

#### ***Used in model or assessment activity***

The effective diffusivities are used for assessing gas driven transport of radionuclides, further described in Moreno and Neretnieks (2013).

#### ***Data used***

See Source of data.

### **3.33.3 Particle densities**

#### ***Short description of data***

The particle density parameter gives the weight of a cubic metre of material without considering porosity hydrogeological.

#### ***Source of data***

The particle densities data are taken from the compilation of data for the SAFE radionuclide transport calculations (SKB 2001).

#### ***Used in model or assessment activity***

The particle densities are used for assessing gas driven transport of radionuclides, further described in Moreno and Neretnieks (2013).

#### ***Data used***

See Source of data.

### **3.33.4 Hydraulic conductivities**

#### ***Short description of data***

Hydraulic conductivity is a material property that describes the ease in which water can pass through the material. This property is a function of the materials density and physical porosity.

#### ***Source of data***

The hydraulic conductivities for concrete and cement are taken from the **Data report** (Table 10-4) where the data are also qualified. The other hydraulic conductivities are taken from the compilation of data for the SAFE radionuclide transport calculations (SKB 2001).

#### ***Used in model or assessment activity***

The hydraulic conductivities are used for assessing gas driven transport of radionuclides, further described in Moreno and Neretnieks (2013).

#### ***Data used***

See Source of data.

### **3.33.5 Concrete/Cement Sorption distribution coefficients.**

#### ***Short description of data***

The dataset contains partitioning constants ( $K_d$ ) used to calculate the impacts of radionuclide release due to gas driven advection.

### **Source of data**

The sorption distribution coefficients are given in the **Data report** (Tables 7-7, 7-8, 7-9 and 7-12).

### **Used in model or assessment activity**

The sorption distribution coefficients are used for assessing gas driven transport of radionuclides, further described in Moreno and Neretnieks (2013)

### **Data used**

See Source of data.

## **3.34 AMF Number 158**

---

### **Output from AMF activity**

Near-field water flows

### **Input to AMF activity**

RN transport due to gas pressure

---

### **Dataset**

Near-field water flows during set points in time

---

### **3.34.1 Near-field water flows during set points in time**

#### **Short description of data**

The dataset contains calculated data flows through the different SFR1 vaults and waste packages at set points in the assessment time-period.

#### **Source of data**

The data are taken from the hydrogeological modelling performed by Abarca et al. (2013).

#### **Used in model or assessment activity**

The Near-field water flows are used for assessing gas driven transport of radionuclides, further described in Moreno and Neretnieks (2013).

#### **Data used**

The used data are given in Moreno and Neretnieks (2013, Table 3-14).

## **3.35 AMF Number 160**

---

### **Output from AMF activity**

Sorption coefficients and diffusion constants

### **Input to AMF activity**

Non-flow related RN transport properties

---

### **Dataset**

Sorption distribution coefficients for Near-field materials  
Effective diffusivities for Near-field materials  
Diffusion available porosities for Near-field materials

---

### **3.35.1 Sorption distribution coefficients for near-field materials**

#### **Short description of data**

The datasets contain the sorption partition coefficients for the near-field, e.g. for cement, bentonite and crushed rock (gravel) that have been produced for the SR-PSU safety assessment.

### **Source of data**

#### **Bentonite and Concrete/Cement**

Data are given in the **Data report** where the data are qualified. The distribution coefficients for hydrated cement paste are given in the **Data report** (Tables 7-7 to 7-10) and the content of hydrated cement paste in different cement/concrete types is given in the **Data report** (Table 7-12). The distribution coefficients for bentonite are given in the **Data report** (Table 7-6).

#### **Crushed rock/Macadam backfill**

Data are given in the **Data report** (Table 8-7) where they are qualified. Note that the data originated from Crawford (2013).

### **Used in model or assessment activity**

The dataset is used in an assessment to select the sorption partition coefficients to use in the radionuclide transport (see AMF Number 75, Section 3.15.1). The sorption coefficients are adjusted in the radionuclide transport modelling to reflect sorption on concrete by using the cement ratio in the concrete. The assessment is further described in the **Radionuclide transport report**.

### **Data used**

See Source of data.

## **3.35.2 Effective diffusivities for near-field materials**

### **Short description of data**

The dataset contains the effective diffusivities for the near-field materials.

### **Source of data**

The concrete/cement and bentonite diffusivities are taken from the **Data report** where the data are qualified. The other diffusivities are taken from SKB (2001).

The concrete/cement diffusivities are given in the **Data report** (Table 9-4). The Bentonite diffusivities are given in the **Data report** (Table 7-5).

### **Used in model or assessment activity**

The dataset is used in an assessment to select the effective diffusivities to use in the radionuclide transport modelling (see AMF Number 75, Section 3.15.2). The assessment is further described in the **Radionuclide transport report**.

### **Data used**

See Source of data.

## **3.35.3 Diffusion available porosities for Near-field materials**

### **Short description of data**

The dataset contains the diffusion available porosities for near-field materials.

### **Source of data**

The concrete/cement and bentonite diffusion available porosities are taken from the **Data report** where the data are also qualified. The other porosities are taken from SKB (2001).

The concrete/cement diffusion available porosities are given in the **Data report** (as Total Porosities, Table 10-4). The Bentonite diffusion available porosities are given in the **Data report** (Table 7-4).

### ***Used in model or assessment activity***

The dataset is used in an assessment to select the effective diffusivities to use in the radionuclide transport modelling (see AMF Number 75, Section 3.15.3). The assessment is further described in the **Radionuclide transport report**.

### ***Data used***

See Source of data.

## **3.36 AMF Number 174**

---

### **Output from AMF activity**

Evolution of repository pH

### **Input to AMF activity**

Non-flow related RN transport properties

---

### **Dataset**

pH evolution in vaults during assessment time-period

---

### **3.36.1 pH evolution in vaults during assessment time-period**

#### ***Short description of data***

The data consists of calculated pH evolutions in the different repository vaults during assessment time-period.

#### ***Source of data***

The pH datasets are calculated and presented in Cronstrand (2014).

### ***Used in model or assessment activity***

The pH datasets are used as supporting data when selecting sorption distribution coefficients for the Near-field radionuclide transport (see AMF Number 75, Section 3.15.1). The selection is performed in the **Data report** (Chapters 7 and 8).

### ***Data used***

See Source of data.

## **3.37 AMF Number 175**

---

### **Output from AMF activity**

Bentonite and Concrete material properties

### **Input to AMF activity**

Evolution of repository pH

---

### **Dataset**

Void and pore volumes in repository vaults  
Cement and concrete amounts in repository vaults

---

### **3.37.1 Void and pore volumes in repository vaults**

#### ***Short description of data***

The data consists of void and pore volumes in the materials found in 1BLA, 1BTF, 2BTF, 1BMA and the Silo.

**Source of data**

The data are derived from the **Initial state report** (Appendix A).

**Used in model or assessment activity**

The data are used in Cronstrand (2014) to calculate an overall pH evolution in the repository vaults throughout the assessment time-period.

**Data used**

See Cronstrand (2014, Sections 3.1.1–3.1.5).

**3.37.2 Cement and concrete amounts in repository vaults****Short description of data**

The data consists of amounts of Cement and concrete (kg) in the materials found in 1BLA, 1BTF, 2BTF, 1BMA and the Silo.

**Source of data**

The data are derived from the **Initial state report** (Appendix A).

**Used in model or assessment activity**

The data are used in Cronstrand (2014) to calculate an overall pH evolution in the repository vaults throughout the assessment time-period.

**Data used**

See Cronstrand (2014, Section 3.6)

**3.38 AMF Number 176****Output from AMF activity**

Near-field hydrology

**Input to AMF activity**

Evolution of repository pH

**Dataset**

Near-field water flows

**3.38.1 Near-field water flows****Short description of data**

The data represents the water flow (m<sup>3</sup>/year) infiltrating the waste in the repository vaults.

**Source of data**

The data are taken from Abarca et al. (2013).

**Used in model or assessment activity**

The data are used in Cronstrand (2014) to calculate an overall pH evolution in the repository vaults throughout the assessment time-period.

**Data used**

See Cronstrand (2014, Section 3.7).

### 3.39 AMF Number 179

---

<b>Output from AMF activity</b> Near-field water flows	<b>Input to AMF activity</b> Evolution of repository redox
<b>Dataset</b> Near-field water flows	

---

#### 3.39.1 Near-field water flows

##### **Short description of data**

The data represents the water flow (m<sup>3</sup>/year) in the repository vaults.

##### **Source of data**

The water flow data are taken from Holmén and Stigsson (2001).

##### **Used in model or assessment activity**

The data are used in the calculations of the repository redox-evolution (Duro et al. 2012).

##### **Data used**

See Duro et al. (2012, Table 6-7).

### 3.40 AMF Number 181

---

<b>Output from AMF activity</b> Generic concrete porewater composition	<b>Input to AMF activity</b> Evolution of repository redox
<b>Dataset</b> Concrete porewater compositions	

---

#### 3.40.1 Concrete porewater composition

##### **Short description of data**

The data are generic chemical concrete porewater compositions.

##### **Source of data**

The composition is taken from SKB (2008)

##### **Used in models, assessments, scenarios, and calculation cases**

The data are used in modelling the repository redox-evolution (Duro et al. 2012).

##### **Data used**

The used data are reproduced in Duro et al. (2012, Table 5-3).

### 3.41 AMF Number 182

---

Output from AMF activity	Input to AMF activity
Bentonite and Concrete material properties	Seismic load

---

**Dataset**  
Bentonite properties  
Concrete properties

---

#### 3.41.1 Bentonite properties

##### **Short description of data**

Bentonite and Sand/Bentonite mechanical properties:

- Young's Modulus
- Poisson ratio
- Density
- Tensile Strength
- Compression strength

##### **Source of data**

Data are derived from Börgesson et al. (2010) and Pusch (2003).

##### **Used in model or assessment activity**

The data are used in an evaluation of the consequence of seismic load on the Silo (Georgiev 2013).

##### **Data used**

See Georgiev (2013, Section 2.4.2).

#### 3.41.2 Concrete properties

##### **Short description of data**

Silo concrete mechanical properties:

- Young Modulus
- Poisson's ratio
- Density
- Tensile Strength
- Compression strength

##### **Source of data**

Data are taken from Boverket (2004).

##### **Used in model or assessment activity**

The data are used in an evaluation of the consequence of seismic load on the Silo (Georgiev 2013).

##### **Data used**

See Georgiev (2013, Section 2.4.1)

## 3.42 AMF Number 183

---

<b>Output from AMF activity</b> Initial state – Repository layout	<b>Input to AMF activity</b> Seismic load
--	--

---

<b>Dataset</b> Silo layout
-------------------------------

---

### 3.42.1 Silo layout

#### **Short description of data**

The dataset contains dimensions of the different parts of the Silo.

#### **Source of data**

The data are derived from the **Initial state report**.

#### **Used in model or assessment activity**

The data are used in an evaluation of seismic load on the Silo (Georgiev 2013).

#### **Data used**

See Source of data.

## 3.43 AMF Number 185

---

<b>Output from AMF activity</b> Silo freezing study	<b>Input to AMF activity</b> Freezing of bentonite
--	---

---

<b>Dataset</b> Assessment on bentonite ice lens formation.
---

---

### 3.43.1 Assessment on bentonite ice lens formation.

#### **Short description of data**

Data is an assessment on if the possibility that an ice lens will be formed in the Silo barriers.

#### **Source of data**

The assessment is performed in Birgersson and Andersson (2014).

#### **Used in model or assessment activity**

The assessment is used when assessing the general reference evolution of the bentonite barriers in the Silo, see the **Main report** (Chapter 6).

#### **Data used**

See the conclusions of Birgersson and Andersson (2014).

## 3.44 AMF Number 205

---

<b>Output from AMF activity</b> Bentonite material properties	<b>Input to AMF activity</b> Evolution of bentonite barrier and plug
<b>Dataset</b> Bentonite and sand/bentonite hydraulic properties	

---

### 3.44.1 Bentonite material properties

#### **Short description of data**

Data consist of hydraulic conductivities and physical porosities for the bentonite and sand/bentonite barriers present in the Silo repository.

#### **Source of data**

The data are taken from Holmén and Stigsson (2001).

#### **Used in model or assessment activity**

The data are used as supporting data in the assessment of the state of the current Silo bentonite barriers (Börgesson et al. 2014).

#### **Data used**

See Source of data.

## 3.45 AMF Number 206

---

<b>Output from AMF activity</b> Evolution of repository pH	<b>Input to AMF activity</b> Corrosion rates
<b>Dataset</b> Evolution of pH in the repository vaults	

---

### 3.45.1 Evolution of pH in the repository vaults

#### **Short description of data**

The dataset contains calculated evolutions of pH in the different repository vaults throughout the assessment time-period.

#### **Source of data**

The full dataset as well as the calculations performed to produce it is given in Cronstrand (2014).

#### **Used in model or assessment activity**

The datasets are used as supporting data when selecting corrosion rates in the **Data report** (Chapter 5).

#### **Data used**

See Source of data.

### 3.46 AMF Number 207

---

<b>Output from AMF activity</b> Concrete literature data	<b>Input to AMF activity</b> Rebar corrosion and chemical degradation of concrete
<b>Dataset</b> Literature data	

---

#### 3.46.1 Literature data

##### **Short description of data**

This is a list of all the references used in the concrete literature survey further described in the **Barrier process report** and in Höglund (2014).

##### **Source of data**

The literature survey is presented in the **Barrier process report** and in Höglund (2014).

##### **Used in models, assessments, scenarios, and calculation cases**

The references are mainly used as background data in Höglund (2014).

##### **Data used**

See Source of data.

### 3.47 AMF Number 209

---

<b>Output from AMF activity</b> Concrete degradation due to sulphate attack	<b>Input to AMF activity</b> Evolution of concrete barriers
<b>Dataset</b> Capacity of waste to absorb sulphate	

---

#### 3.47.1 Capacity of cement and waste to absorb sulphate

##### **Short description of data**

The dataset contains the capacity of the cement to absorb sulphate.

##### **Source of data**

The data are given in SKBdoc 1417785 as well as in the **Main report** (Table 6-2).

##### **Used in model or assessment activity**

The dataset is used in an assessment of concrete degradation due to sulphate attack. The assessment is further described in the **Main report** (Chapter 6).

##### **Data used**

See Source of data.

## 4 Geosphere

### 4.1 AMF Number 2

---

Output from AMF activity	Input to AMF activity
Site specific bedrock transport properties	Non-flow related transport properties

---

**Dataset**

Sorption partitioning coefficients  
Effective diffusivity,  
Rock matrix porosity

---

#### 4.1.1 Sorption partitioning coefficients

##### **Short description of data**

The data concern the sorption partitioning coefficients for different elements of the selected inventory in the crystalline host rock surrounding the SFR repository. The data represent present day conditions and a rock mass and groundwater/porewater that are undisturbed by interactions with materials in the repository (e.g. cementitious materials and complexing agents). It should be noted that different data are given for different redox states of the elements.

##### **Source of data**

The data are taken from, and justified in, a dedicated SR-PSU report on sorption coefficients (Crawford 2013) in the geosphere, which in turn is an update of Crawford (2010).

##### **Used in model or assessment activity**

The data are used in an assessment of which  $K_d$  values to use in different scenario or calculation case in the radionuclide transport modelling, see Section 4.18.

##### **Data used**

See Source of data.

#### 4.1.2 Effective diffusivity

##### **Short description of data**

The data concern the effective diffusivity of the crystalline host rock surrounding the SFR repository. The data are valid for all flow paths, depths, and rock volumes. The data are valid for the groundwater chemistry expected at all flow paths, depths, and rock volumes. One dataset is provided for cations and non-charged solutes, and another dataset is provided for anions.

##### **Source of data**

The data are taken from, and justified in, a dedicated report on site specific effective diffusivities (Löfgren and Sidborn 2010). The data are based on site specific in situ measurements at the Forsmark area in Sweden.

##### **Used in model or assessment activity**

The data are used in an assessment of which  $D_e$  values to use in different scenario or calculation case in radionuclide transport modelling, see Section 4.18.

### **Data used**

The diffusivities used in the assessment are given Löfgren (2014, Table 6-1).

### **4.1.3 Rock matrix porosity**

#### **Short description of data**

These data concerns the rock matrix porosity of the crystalline host rock surrounding the SFR repository. The data are valid for all flow paths, depths, and rock volumes.

#### **Source of data**

No porosity measurements have been made on rock from the SFR site. Therefore, the rock porosity measurements provided for SR-Site, based on the Forsmark site investigations, are used (SKB 2010b, Table 6-90).

#### **Used in model or assessment activity**

The data are used in an assessment of which  $\varepsilon$  values to use in different scenario or calculation case in radionuclide transport modelling, see Section 4.18.

### **Data used**

See Source of data.

## **4.2 AMF Number 3**

---

#### **Output from AMF activity**

Site specific groundwater compositions

#### **Input to AMF activity**

Non-flow related transport properties

---

#### **Dataset**

SR-PSU Groundwater types

---

### **4.2.1 SR-PSU Groundwater types**

#### **Short description of data**

The data consists of groundwater compositions representative for different time domains in the SR PSU safety assessment.

#### **Source of data**

The groundwater types are produced and presented in Auqué et al. (2013).

#### **Used in model or assessment activity**

The groundwater types are used in an assessment selecting sorption partitioning coefficients,  $K_d$ -values, for use in the SR-PSU radionuclide transport calculations for the geosphere rock matrix (Crawford 2013), and for the crushed rock backfill used in some repository vaults (**Data report**, Chapter 8).

### **Data used**

See Source of data.

### 4.3 AMF Number 4

---

<b>Output from AMF activity</b> Site specific data – Bedrock hydrogeology	<b>Input to AMF activity</b> Hydrogeology
<b>Dataset</b> Hydrogeological model from SDM-PSU	

---

#### 4.3.1 Hydrogeological model from SDM-PSU

##### **Short description of data**

The site descriptive model (SDM-PSU) is an integrated model for bedrock geology, rock mechanics, bedrock hydrogeology, and bedrock hydrogeochemistry. The data described here consists of the hydrogeological part of the model.

##### **Source of data**

The model is presented in SKB (2013b). The files are stored in SKBdoc document 1385714<sup>8</sup>.

##### **Used in model or assessment activity**

The information on the hydrogeological conditions given in SDM-PSU is used in the description of the reference evolution, see the **Main report** (Section 4.7 and Chapter 6).

##### **Data used**

See Source of data.

### 4.4 AMF Number 6

---

<b>Output from AMF activity</b> Rock fallout and EDZ	<b>Input to AMF activity</b> Hydrogeology
<b>Dataset</b> Presence or non-presence of extensive rock fallout and EDZ, affecting hydraulic properties in rock mass.	

---

#### 4.4.1 Presence or non-presence of extensive rock fallout and EDZ

##### **Short description of data**

The data consists of an assessment of the consequences of rock fallout and EDZ occurring in the bedrock in and around the repository throughout the assessment time-period.

##### **Source of data**

The assessment is presented in Mas Ivars et al. (2014).

##### **Used in model or assessment activity**

The assessment was used when setting up the regional hydrogeological model (see Odén et al. 2014).

##### **Data used**

The conclusions of the assessment are presented in Mas Ivars et al. (2014).

---

<sup>8</sup> Internal document, Svensk Kärnbränslehantering AB.

## 4.5 AMF Number 7

---

Output from AMF activity	Input to AMF activity
Hydrogeology	Near-field hydrology

---

**Dataset**  
Pressure at rock volume boundaries  
Groundwater velocities in rock volume  
Permeability of rock volume

---

### 4.5.1 Pressure at rock volume boundaries

#### **Short description of data**

The dataset contains the hydraulic pressure field (Pa) of the groundwater in the bedrock at the SFR location. The data are used to consistently connect the regional and near-field hydrology models. Data corresponding to the hydrogeological states at 2000 AD, 3000 AD and 5000 AD of the *global warming climate case* were used, as well as data for the periglacial climate domain with shallow permafrost.

#### **Source of data**

The data are given in Chapter 11 in the **Data report** where the data also are qualified.

#### **Used in model or assessment activity**

The pressure data was used in the assessment of the near-field hydrology as presented by Abarca et al. (2013).

#### **Data used**

The data are presented in the **Data report** (Chapter 11). The data files used can be found at: [svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Geohydro/AMF7](http://svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Geohydro/AMF7)

### 4.5.2 Groundwater velocities in rock volume

#### **Short description of data**

The dataset contains the groundwater velocity field (m/s) in the bedrock at the SFR location. The data are used to consistently connect the regional and near-field hydrology models. Data corresponding to the hydrogeological states at 2000 AD, 3000 AD and 5000 AD of the Global warming climate case were used, as well as data for the periglacial climate domain with shallow permafrost.

#### **Source of data**

The data are presented in Chapter 11 in the **Data report** where the data are qualified.

#### **Used in model or assessment activity**

The groundwater velocity data was used in the assessment of the near-field hydrology as presented by Abarca et al. (2013).

#### **Data used**

The data are presented in the **Data report**, Chapter 11. The data files used can be found at: [svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Geohydro/AMF7](http://svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Geohydro/AMF7)

### 4.5.3 Permeability of rock volume

#### **Short description of data**

The dataset contains the anisotropic hydraulic conductivity (m/s) field of the bedrock. The data are used to consistently connect the regional and near-field hydrology models. Data corresponding to the bedrock realisations Base\_Case1\_DFN\_R85, nc\_DEP\_R07\_DFN\_R85 and nc\_NoD\_R01\_DFN\_R18 were used (Odén et al. 2014).

#### **Source of data**

The data are presented in Chapter 11 in the **Data report** where the data are qualified.

#### **Used in model or assessment activity**

The hydraulic conductivity data was used in the modelling of the near-field hydrology as presented by Abarca et al. (2013).

#### **Data used**

The data are presented in the **Data report**, Chapter 11. The data files used can be found at: [svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Geohydro/AMF7](http://svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Geohydro/AMF7)

## 4.6 AMF Number 9

---

#### **Output from AMF activity**

Hydrogeology

#### **Input to AMF activity**

Geochemical evolution

---

#### **Dataset**

Particle tracks to and from the SFR repositories

---

### 4.6.1 Particle tracks to and from the SFR repositories

#### **Short description of data**

Particle trajectories describing the different pathways between the repositories and the surrounding rock.

#### **Source of data**

The data are generated with the code DarcyTools, see the **Model summary report** and reported in Odén et al. (2014, Sections 4.5.6 and 4.5.7) and Vidstrand et al. (2014, Section 8.6).

#### **Used in model or assessment activity**

The particle trajectories are used in an assessment of the hydrogeochemical see the **Main report** (Chapter 6).

#### **Data used**

See Source of data.

## 4.7 AMF Number 10

---

Output from AMF activity	Input to AMF activity
Site specific data – Bedrock geology	Rock fallout and EDZ

---

**Dataset**

Fracture stress test data  
Fracture mapping data

---

### 4.7.1 Fracture stress test data

#### **Short description of data**

The dataset contains tilt test data from experiments performed on the bedrock during the site characterisation of Forsmark for the spent fuel repository.

#### **Source of data**

The experimental data were reported in Glamheden et al. (2007).

#### **Used in model or assessment activity**

The fracture stress test data are used in an assessment of the consequences of possible future Rock fallout and EDZ in the SFR repositories. The assessment is presented in Mas Ivars et al. (2014).

#### **Data used**

See Mas Ivars et al. (2014, Table 2-4).

### 4.7.2 Fracture mapping data

#### **Short description of data**

The fracture mapping is a digital presentation of the fractures occurring in the bedrock surrounding the SFR tunnels. The fracture mapping is used to estimate for instance average distances between fractures.

#### **Source of data**

The fracture mapping was performed in Christiansson and Bolvede (1987).

#### **Used in model or assessment activity**

The fracture mapping data are used in an assessment of the consequences of possible future Rock fallout and EDZ in the SFR repositories. The assessment is presented in Mas Ivars et al. (2014).

#### **Data used**

See Source of data.

## 4.8 AMF Number 11

Output from AMF activity	Input to AMF activity
Hydrogeology	RN transport in water phase
<b>Dataset</b>	
F-factors for travel paths from each repository vault to the surface	
Travel time for travel paths from each repository vault to the surface	
Peclet number applicable for entire rock volume	

### 4.8.1 F-factors for travel paths from each repository vault to the surface

#### **Short description of data**

The flow-related transport resistance in rock is an entity, integrated along flow paths, that quantifies the flow-related (hydrodynamic) aspects of the possible retention of solutes transported in a fractured medium.

#### **Source of data**

The data results from particle tracking in the hydrogeological calculations (Odén et al. 2014).

#### **Used in model or assessment activity**

The F-factors are used in the radionuclide transport calculations when calculating residence times in the geosphere, see the **Radionuclide transport report**.

#### **Data used**

For the base case (used in all calculation cases except CCL\_FH):

```
svn://svn.skb.se/project/SFR/SR-PSU-Data/Geosphere/Indata/Ecologo/[MODEL]/[MODEL]_BASE_CASE1_DFN_R18_L1B.txt
```

Where: [MODEL]: is the name of the model for each repository, i.e. one of {BLA1, BLA2, BLA3, BLA4, BLA5, BMA1, BMA2, BRT, BTF1, BTF2, Silo}

(Note: An exception to this naming convention is the files for 2-5BLA, which are stored in the same directory, this directory is named BLA2-5)

For the *high flow in the bedrock calculation case* (CCL\_FH) another dataset was used, the location of these files can be obtained from the ones above if the sub-string "BASE\_CASE1\_DFN\_R18\_L1B" is replaced with "nc\_DEP\_R07\_DFN\_R85\_L1B"

### 4.8.2 Travel time for travel paths from each repository vault to the surface

#### **Short description of data**

Hydrogeological calculations for the geosphere are performed with the code DarcyTools, see the **Model summary report**. These calculations results in a flow field used for particle tracking from which one result is the travel-times. The results are used to calculate the retention of radionuclides in the geosphere.

#### **Source of data**

The data results from particle tracking in the hydrogeological calculations (Odén et al. 2014).

#### **Used in model or assessment activity**

Travel time was used for the radionuclide transport calculations for the geosphere, see the **Radionuclide transport report**.

### **Data used**

Data used are stored in same files as the corresponding flow wetted surface areas, see Section 4.8.1.

## **4.8.3 Peclet number applicable for entire rock volume**

### **Short description of data**

The Peclet number determines the ratio between advective and dispersive transport in fractured or porous media.

### **Source of data**

The Peclet number from earlier assessments within SKB was used, see SKB (2001)

### **Used in model or assessment activity**

The Peclet number was used in the calculations for radionuclide transport in the geosphere, see the **Radionuclide transport report**.

### **Data used**

The used Peclet number is stored at:

svn.skb.se/project/SFR/SR-PSU-Data/Geosphere/Indata/Ecolego/FarfieldOther (AMF11&87).xlsx

## **4.9 AMF Number 12**

---

### **Output from AMF activity**

Hydrogeology

### **Input to AMF activity**

Biosphere object identification

---

### **Dataset**

Exit locations (coordinates) for defined time steps/events

---

## **4.9.1 Exit locations (coordinates) for defined time steps/events**

### **Short description of data**

Exit locations in x y z coordinates, with 15 columns of data including travel time, path length, flow-related transport resistance, tunnel-wall passage location, etc.

### **Source of data**

The exit locations are presented in SKBdoc 1395214 and in Öhman et al. (2014).

### **Used in models, assessments, scenarios, and calculation cases**

The exit points TD-08 (SKBdoc 1395214) and water fluxes were used in the identification and delineation of biosphere objects (further described in the **Biosphere synthesis report**). The same biosphere objects are used for all scenarios and climate cases. TD-11 (Öhman et al. 2014) was a later delivery of exit locations and the delineation of biosphere has been checked against the new exit locations.

### **Data used**

The coordinate data are stored at SVN:

TD-08:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Synthesis/Leveranser/geohydroleveranser/Td8a\_Exit\_locations\_2012-09-18.zip

TD-11:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/ReleasePoints/TD11

Talik exit locations are described in:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Synthesis/Leveranser/geohydroleveranser/talik\_exit\_locations

## 4.10 AMF Number 16

---

**Output from AMF activity**

RN transport in water phase

**Input to AMF activity**

RN transport and dose

---

**Dataset**

Radionuclide release from the geosphere to the biosphere

---

### 4.10.1 Radionuclide release from the geosphere to the biosphere

#### **Short description of data**

The data are the result of probabilistic radionuclide transport calculations for the geosphere. The data consists of 100 time series of releases for each radionuclide. The data has a resolution of 50 years for the whole simulated time span of 100,000 years.

#### **Source of data**

The data are the result of radionuclide transport calculations for the geosphere, see further details in the **Radionuclide transport report**.

#### **Used in model or assessment activity**

The data are used as input to the calculations of radionuclide transport in the surface systems, for calculations of environmental concentrations, which are used for calculations of doses to humans and non-human biota.

#### **Data used**

The data are stored at the subversion repository hosted at SKB.

The releases for each calculation case and vault model can be found at a location like:

svn://svn.skb.se/kalkyl/SFR/SR-PSU/Indata/Release2Biosphere/[CC]/[MODEL].ear

Where:

[CC]: is the calculation case number corresponding to the calculation case (see Appendix B),

[MODEL]: is the name of the model for each repository, i.e. one of {BLA1, BLA2, BLA3, BLA4, BLA5, BMA1, BMA2, BRT, BTF1, BTF2, Silo}

## 4.11 AMF Number 17

---

**Output from AMF activity**

Site specific data

**Input to AMF activity**

Weichselian permafrost development

---

**Dataset**

2D profile at Forsmark  
Topography and soil types  
Rock domains and deformation zones  
Hydraulic properties for rock domains and soil types  
Thermal properties for different rock domains and soil types  
Ionic composition of groundwater  
Geothermal heat flow

---

### 4.11.1 2D profile at Forsmark

**Source of data**

The 2D profile was determined by Hartikainen et al. (2010).

**Used in model or assessment activity**

Weichselian permafrost development at Forsmark during the period from 115,000 years ago to 70,000 years ago was modelled with a numerical permafrost model in a 2D vertical cross-section (Hartikainen et al. 2010 and **Model summary report**), as described in the **Climate report** (Section 2.1.4).

The results of these 2D permafrost model simulations were utilised, together with the 1D permafrost simulations that were made for the full glacial cycle, in the definition and description of the *Weichselian glacial cycle climate case* representing natural variability, see the **Climate report** (Section 4.5).

**Data used**

The 2D profile is described in Hartikainen et al. (2010, Appendix A).

### 4.11.2 Topography and soil types

**Source of data**

The topography is based on a 20 m grid Digital Elevation Model (DEM) prepared for the safety assessment SR-Site (Strömngren and Brydsten 2008). The description of soil cover along the profile originates from the regolith depth model in the Site Descriptive Model, version 2.2 for the spent fuel repository (Hedenström et al. 2008).

**Used in model or assessment activity**

See Section 4.11.1.

**Data used**

The topography and soil types along the 2D profile are described in Hartikainen et al. (2010, Appendix B).

### 4.11.3 Rock domains and deformation zones

**Source of data**

The data were taken from SDM 2.2 for the spent fuel repository (Stephens et al. 2007).

**Used in model or assessment activity**

See Section 4.11.1

**Data used**

The rock domains and deformation zones along the 2D profile are described in Hartikainen et al. (2010, Appendix C).

**4.11.4 Hydraulic properties for rock domains and soil types****Source of data**

The data were taken from Follin (2008).

**Used in model or assessment activity**

See Section 4.11.1.

**Data used**

Hydraulic properties for rock domains and soil types in Forsmark are described in Hartikainen et al. (2010, Appendix D).

**4.11.5 Thermal properties for rock domains and soil types****Source of data**

The data were calculated by Sundberg et al. (2009) and Hartikainen et al. (2010, Appendix E) based on site descriptive modelling for the spent fuel repository.

**Used in model or assessment activity**

See Section 4.11.1.

**Data used**

Thermal properties for rock domains and soil types are described in Hartikainen et al. (2010, Appendix E).

**4.11.6 Ionic composition of ground water****Source of data**

The data were based on the hydrogeochemical site descriptive work carried out for SR-Site (Laaksoharju et al. 2008).

**Used in model or assessment activity**

See Section 4.11.1.

**Data used**

Thermal properties for rock domains and soil types are described in Hartikainen et al. (2010, Appendix F).

**4.11.7 Geothermal heat flow****Source of data**

The data was calculated by Hartikainen et al. (2010), based on Sundberg et al. (2009).

**Used in model or assessment activity**

See Section 4.11.1

**Data used**

The geothermal heat flow used is given in Hartikainen et al. (2010, Table 2-3).

## 4.12 AMF Number 24

---

Output from AMF activity	Input to AMF activity
Site specific data – Bedrock geology	Seismic load

---

**Dataset**  
Seismic response spectrum load of Silo

---

### 4.12.1 Seismic response spectrum load of Silo

#### **Short description of data**

The seismic load is represented by an acceleration response spectrum. It essentially specifies the level of the seismic force acting on a structure based on the structure's natural frequency and damping.

#### **Source of data**

The seismic load spectrum was presented in a Seismic safety report produced by Swedish Nuclear Power Inspectorate (SKI 1992).

#### **Used in model or assessment activity**

The spectrum is used in an evaluation of seismic load on the Silo structure (Georgiev 2013).

#### **Data used**

The spectrum is displayed in Georgiev (2013, Figures 2-3 and 2-4).

## 4.13 AMF Number 26

---

Output from AMF activity	Input to AMF activity
Rock fallout and EDZ	Mechanical degradation of concrete due to load

---

**Dataset**  
Analysis of the consequence of rock fallout

---

### 4.13.1 Analysis of the consequence of rock fallout

#### **Short description of data**

The dataset is an assessment of the consequence of future rock fallout.

#### **Source of data**

The assessment is presented in Mas Ivars et al. (2014).

#### **Used in model or assessment activity**

The assessment conclusion is used in another assessment regarding the state of the concrete/bentonite barriers and concrete structures during the repository evolution. This is further described in the **Main report**.

#### **Data used**

The assessment conclusions are presented in Mas Ivars et al. (2014).

## 4.14 AMF Number 28

---

<b>Output from AMF activity</b> Geochemical evolution	<b>Input to AMF activity</b> Non-flow related RN transport properties
--	--

---

**Dataset**  
Assessment of groundwater influence on repository water.

---

### 4.14.1 Assessment of groundwater influence on repository water

#### *Short description of data*

The dataset is an assessment regarding influence of the surrounding groundwater on the repository water.

#### *Source of data*

The assessment is performed in the **Main report** (Chapter 6) regarding the reference evolution.

#### *Used in model or assessment activity*

The assessment is used when selecting sorption partitioning coefficients, see the **Data report** (Chapter 7).

#### *Data used*

See Source of data.

## 4.15 AMF Number 29

---

<b>Output from AMF activity</b> Site specific data – Hydrogeochemistry	<b>Input to AMF activity</b> Site specific groundwater compositions
---	--

---

**Dataset**  
Conceptual hydrogeochemical model

---

### 4.15.1 Conceptual hydrogeochemical model

#### *Short description of data*

A conceptual model used to describe the current hydrogeochemical system in the bedrock surrounding the area where SFR is located.

#### *Source of data*

The model is described in the site descriptive modelling report for SR-PSU (SKB 2013b).

#### *Used in model or assessment activity*

The hydrogeochemical model is used to estimate four different reference groundwater types that are valid during the assessment time-period. This is done in Auqué et al. (2013).

#### *Data used*

Data used are stored in SKBdoc 1429537<sup>9</sup>.

---

<sup>9</sup> Internal document, Svensk Kärnbränslehantering AB.

## 4.16 AMF Number 62

---

<b>Output from AMF activity</b> Site specific data – Well/borehole inventory	<b>Input to AMF activity</b> Site specific groundwater compositions
---	--

---

**Dataset**  
Chemical composition of Well/borehole samples

---

### 4.16.1 Site specific data

#### **Short description of data**

The dataset contains chemical analyses from well and borehole samples taken at and around the SFR Site. The dataset contains samples taken between 1984 and 2011.

#### **Source of data**

The dataset is compiled and presented in Nilsson et al. (2011).

#### **Used in model or assessment activity**

The dataset is used to estimate four different reference groundwater types that are valid during the assessment time-period. This is done in Auqué et al. (2013)

#### **Data used**

Data used are stored in SKBdoc 1429537<sup>10</sup>.

## 4.17 AMF Number 84

---

<b>Output from AMF activity</b> Hydrogeology	<b>Input to AMF activity</b> Surface hydrology
---	---

---

**Dataset**  
Hydrogeological properties of the rock

---

### 4.17.1 Hydrogeological properties of the rock

#### **Short description of data**

Data for the hydrogeological properties of the rock (horizontal and vertical hydraulic conductivities, effective porosity) down to –634 m elevation (RHB70).

#### **Source of data**

The dataset is calculated using the DarcyTools groundwater-flow modelling tool. The dataset is divided into two deliveries, one down to –170 m elevation and one down to –634 m elevation. The dataset (BASE\_CASE1\_DFN\_R85) is further described in Odén et al. (2014).

#### **Used in model or assessment activity**

The dataset is used in MIKE SHE models run for present-day conditions, and in MIKE SHE models run for 3000, 5000 and 11,000 AD. For further details, see Werner et al. (2013).

#### **Data used**

The delivered dataset is stored on:  
[svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF84](http://svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF84)

---

<sup>10</sup> Internal document, Svensk Kärnbränslehantering AB.

## 4.18 AMF Number 87

Output from AMF activity	Input to AMF activity
Non-flow related migration properties	RN transport in water phase
<b>Dataset</b>	
Sorption partitioning coefficients, applicable for entire rock volume	
Effective diffusivity, applicable for entire rock volume	
Rock matrix porosity, applicable for entire rock volume	

### 4.18.1 Sorption partitioning coefficients applicable for entire rock volume

#### **Short description of data**

These data contains the sorption partitioning coefficients of the crystalline host rock surrounding the repository. The data are valid for all flow paths, depths, and rock volumes. The data are valid for the groundwater chemistry expected at all flow paths, depths, and rock volumes.

#### **Source of data**

The data are taken from AMF number 2 (Section 4.1.1) which is an assessment of  $K_d$  values used in **SR-Site**. The assessment is performed in Crawford (2013). Data are also qualified for use as crushed rock gravel in the **Data report** (Chapter 8).

#### **Used in model or assessment activity**

The dataset is used when calculating the time it takes for radionuclides to travel through the geosphere from the repository to geosphere exit locations, see the **Radionuclide transport report**.

#### **Data used**

The used dataset is stored at:

[svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Geosphere/Indata/Ecolego/FarfieldKd\(AMF87\).xlsx](svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Geosphere/Indata/Ecolego/FarfieldKd(AMF87).xlsx)

### 4.18.2 Effective diffusivity applicable for entire rock volume

#### **Short description of data**

The dataset contains the effective diffusivity,  $D_e$ , of the crystalline host rock surrounding the repository. The data are valid for the groundwater chemistry expected at all flow paths, depths, and rock volumes.

#### **Source of data**

The  $D_e$  data are taken from AMF number 2 (Section 4.1.2) which is an assessment of the  $D_e$  data used in SR-Site. The assessment is reported in Löfgren (2014).

#### **Used in models, assessments, scenarios, and/or calculation cases**

The dataset is used when calculating the time it takes for radionuclides to travel through the geosphere from the repository to geosphere exit locations, see the **Radionuclide transport report**.

#### **Data used**

The used data are stored at:

[svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Geosphere/Indata/Ecolego/FarfieldDe\(AMF87\).xlsx](svn.skbn.se/trac/projekt/browser/SFR/SR-PSU-Data/Geosphere/Indata/Ecolego/FarfieldDe(AMF87).xlsx)

### 4.18.3 Rock matrix porosity applicable for entire rock volume

#### **Short description of data**

These data concerns the rock matrix porosity of the crystalline host rock surrounding the SFR repository. The data are valid for all flow paths, depths, and rock volumes.

#### **Source of data**

The  $\epsilon$  data are taken from AMF number 2 (Section 4.1.2) which is an assessment of the  $\epsilon$  data used in SR-Site (SKB 2010b, Table 6-90).

#### **Used in model or assessment activity**

The data are used in the **Radionuclide transport report** when calculating the time it takes for radionuclides to travel through the geosphere from the repository to geosphere exit locations.

#### **Data used**

See Source of data.

## 4.19 AMF Number 105

---

#### **Output from AMF activity**

Site specific data – Mineralogy

#### **Input to AMF activity**

Geochemical evolution

---

#### **Dataset**

Fracture mineral types and occurrences.

---

### 4.19.1 Fracture mineral types and occurrences.

#### **Short description of data**

The data consist of the different fracture minerals found, and their abundance, during the site investigation programme SDM-PSU (SKB 2013b).

#### **Source of data**

The data are taken from the site descriptive modelling performed around the Forsmark area, see Sandström and Tullborg (2011), Sandström et al. (2014) and Nilsson et al. (2011).

#### **Used in model or assessment activity**

The data are used in an assessment of the hydrogeochemical evolution around the Forsmark area, see the **Main report** (Chapter 6).

#### **Data used**

See Source of data.

## 4.20 AMF Number 110

---

<b>Output from AMF activity</b> Site specific data – Rock mechanics	<b>Input to AMF activity</b> Rock fallout and EDZ
--	--

---

<b>Dataset</b> Mechanical rock properties
--

---

### 4.20.1 Mechanical rock properties

#### **Short description of data**

The dataset contains mechanical properties of the bedrock surrounding the SFR repository. The dataset concerns both intact rock between fractures and weakness zones with fractures.

#### **Source of data**

The mechanical properties are taken from the Site descriptive modelling Forsmark stage 2.1 (Glamheden et al. 2007)

#### **Used in model or assessment activity**

The mechanical properties are used in an assessment of the consequence of rock fallout and EDZ in the SFR repositories. The assessment is presented in Mas Ivars et al. (2014).

#### **Data used**

See Mas Ivars et al. (2014, Tables 2-2 and 2-3).

## 4.21 AMF Number 135

---

<b>Output from AMF activity</b> Hydrogeology	<b>Input to AMF activity</b> Well related flow data
---	--

---

<b>Dataset</b> Fraction of repository water reaching probable well locations
---

---

### 4.21.1 Fraction of repository water reaching well locations

#### **Short description of data**

The data are calculated by means of DarcyTools particle tracking, and quantify the fraction of particles released from SFR repository parts that reach specified wells drilled in rock.

#### **Source of data**

The data are described and presented in Öhman and Vidstrand (2014) and also summarised in Werner et al. (2014, Chapter 6 and Appendix 3).

#### **Used in model or assessment activity**

The data are used to estimate radiological risk, related to water usage, to future, self-sufficient inhabitants using water-supply wells in rock. These include wells associated to settlements in the vicinity of future arable-land areas and wells in the well-interaction area, i.e. the area in which wells drilled in the rock may have the highest concentrations of radionuclides originating from SFR.

#### **Data used**

See Source of data.

## 4.22 AMF Number 136

---

<b>Output from AMF activity</b> Well related flow data	<b>Input to AMF activity</b> RN transport in water phase
---	---

---

<b>Dataset</b> Dose to well
--------------------------------

---

### 4.22.1 Dose to well

#### **Short description of data**

The data are used to estimate radiological risk, related to water usage, to future, self-sufficient inhabitants using water-supply wells in rock.

#### **Source of data**

The data are presented in Öhman and Vidstrand (2014) and also summarised in Werner et al. (2014, Chapter 6 and Appendix).

#### **Used in model or assessment activity**

The data are used to estimate radiological risk, related to water usage, to future, self-sufficient inhabitants using water-supply wells in rock. These include wells associated to settlements in the vicinity of future arable-land areas and wells in the well-interaction area, i.e. the area in which wells drilled in the rock may have the highest concentrations of radionuclides originating from SFR.

#### **Data used**

See Source of data.

## 4.23 AMF Number 139

---

<b>Output from AMF activity</b> Site specific groundwater compositions	<b>Input to AMF activity</b> Geochemical evolution
---	---

---

<b>Dataset</b> Groundwater compositions
--

---

### 4.23.1 Groundwater compositions

#### **Short description of data**

The data consists of groundwater compositions representative for different time domains considered in the SR-PSU safety assessment.

#### **Source of data**

The groundwater types are produced and presented in Auqué et al. (2013, Tables 5-1 to 5-3).

#### **Used in model or assessment activity**

The data are used in an assessment of the hydrogeochemical evolution around the Forsmark area, see the **Main report** (Chapter 6).

#### **Data used**

See Source of data.

## 4.24 AMF Number 145

---

<b>Output from AMF activity</b> Site specific groundwater compositions	<b>Input to AMF activity</b> Rebar corrosion and chemical degradation of concrete
---	--

---

<b>Dataset</b> Groundwater compositions
--

---

### 4.24.1 Groundwater compositions

#### **Short description of data**

The dataset describes the site specific chemical composition of groundwater used in the evaluation of the rebar corrosion and chemical degradation of concrete in the SR-PSU safety assessment.

#### **Source of data**

Data have been taken from Höglund (2014, Tables 3-1 and 3-2). These data are based on proposed groundwater compositions presented in Höglund (2001).

#### **Used in model or assessment activity**

The site specific groundwater compositions are used in the assessment of the impact of corrosion of reinforcement bars and other embedded steel components on the integrity of the concrete barriers, as well as in the modelling of the chemical degradation of concrete barriers in the 1BMA and 2BMA vault, see Höglund (2014). In the calculations, based on shoreline changes, a stepwise transition from the initial Salt water period to the Fresh water period has been assumed to take place at 2000 years after closure. This is reflected in a stepwise change in the site specific groundwater composition.

#### **Data used**

See Source of data.

## 4.25 AMF Number 184

---

<b>Output from AMF activity</b> Initial state – Repository layout	<b>Input to AMF activity</b> Rock fallout and EDZ
--	--

---

<b>Dataset</b> BMA and BLA vault dimensions
--

---

### 4.25.1 BMA and BLA vault dimensions

#### **Short description of data**

Data consists of 3D dimensions of the BMA and BLA repository vaults.

#### **Source of data**

The dimensions are taken from Christiansson and Bolvede (1987).

#### **Used in model or assessment activity**

The dimensions are used in an assessment of the consequences of rock fallout and EDZ within the repository (Mas Ivars et al. 2014).

#### **Data used**

See Source of data.

## 4.26 AMF Number 197

---

Output from AMF activity	Input to AMF activity
Site specific data	Permafrost development

---

**Dataset**  
2D profile at Forsmark  
Topography and soil types  
Rock domains and deformation zones  
Hydraulic properties for rock domains and soil types  
Thermal properties for different rock domains and soil types  
Ionic composition of groundwater  
Geothermal heat flow

---

### 4.26.1 2D profile at Forsmark

#### **Source of data**

The 2D profile was determined by Hartikainen et al. (2010).

#### **Used in model or assessment activity**

Permafrost development at Forsmark was modelled with a numerical permafrost model in a 2D vertical cross-section (Brandefelt et al. 2013), as described in the **Climate report** and the **Model summary report**.

The results of these 2D permafrost model simulations were utilised in the definition of two of the climate cases representing prolonged interglacial conditions, i.e. the *global warming* and *early periglacial* climate cases (see **Climate report**, Sections 4.2 and 4.3).

#### **Data used**

The 2D profile is described in Hartikainen et al. (2010, Appendix A).

### 4.26.2 Topography and soil types

#### **Source of data**

The topography is based on a 20 m grid Digital Elevation Model (DEM) prepared for the safety assessment SR-Site (Strömberg and Brydsten 2008). The description of soil cover along the profile originates from the regolith depth model in the Site Descriptive Model, version 2.2 prepared for the safety assessment SR-Site (Hedenström et al. 2008).

#### **Used in model or assessment activity**

See under Section 4.26.1.

#### **Data used**

The topography and soil types along the 2D profile are described in Hartikainen et al. (2010, Appendix B).

### 4.26.3 Rock domains and deformation zones

#### **Source of data**

The data were taken from site investigations for the spent fuel repository, SDM 2.2 (Stephens et al. 2007).

#### **Used in model or assessment activity**

See under Section 4.26.1.

**Data used**

The rock domains and deformation zones along the 2D profile are described in Hartikainen et al. (2010, Appendix C).

**4.26.4 Hydraulic properties for rock domains and soil types****Source of data**

The data were taken from Follin (2008).

**Used in model or assessment activity**

See under Section 4.26.1.

**Data used**

Hydraulic properties for rock domains and soil types in Forsmark are described in Hartikainen et al. (2010, Appendix D).

**4.26.5 Thermal properties for rock domains and soil types****Source of data**

The data were calculated by Sundberg et al. (2009) and Hartikainen et al. (2010, Appendix E) based on site descriptive modelling of Forsmark.

**Used in model or assessment activity**

See under Section 4.26.1.

**Data used**

Thermal properties for rock domains and soil types are described in Hartikainen et al. (2010, Appendix E).

**4.26.6 Ionic composition of ground water****Source of data**

The data were based on the hydrogeochemical site descriptive work carried out for SR-Site (Laaksoharju et al. 2008).

**Used in model or assessment activity**

See under Section 4.26.1.

**Data used**

Thermal properties for rock domains and soil types are described in Hartikainen et al. (2010, Appendix F).

**4.26.7 Geothermal heat flow****Source of data**

The data were calculated by Hartikainen et al. (2010), based on Sundberg et al. (2009).

**Used in model or assessment activity**

See under Section 4.26.1.

### **Data used**

The geothermal heat flow used is given in Hartikainen et al. (2010, Table 2-3).

## **4.27 AMF Number 211**

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Peclet number	RN transport in water phase
<b>Dataset</b>	
Péclet number	

### **4.27.1 Péclet number**

#### **Short description of data**

The Péclet number is defined to be the ratio of the rate of advection of a physical quantity by the flow to the rate of diffusion of the same quantity driven by an appropriate gradient.

#### **Source of data**

The Péclet number used in **SR-PSU** is taken from the **SR-Site** safety assessment (SKB 2010b, Section 6.7).

#### **Used in model or assessment activity**

The Péclet number is used when calculating the time it takes for radionuclides to travel through the geosphere from the repository to geosphere exit locations (**Radionuclide transport report**).

### **Data used**

Used data are stored at:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU-Data/Geosphere/Indata/Ecolego/  
FarfieldOther(AMF1187).xlsx

## 5 Climate

### 5.1 AMF Number 13

---

<b>Output from AMF activity</b> Climate cases representing prolonged interglacial conditions	<b>Input to AMF activity</b> Landscape modelling
---	---

---

**Dataset**  
Shore-level evolution

---

#### 5.1.1 Shore-level evolution

##### **Short description of data**

The dataset contains relative shore-level evolution at Forsmark for the next 100,000 years in Forsmark. Relative shore-level is defined as the vertical distance between the shore-level at a specific time and the average shore level at present.

##### **Source of data**

Relative shore-level for the climate cases representing prolonged interglacial conditions were defined based on global isostatic model simulations, extrapolations of up-to-present Holocene isostatic uplift rates at the Forsmark site, and peer-review-published data on future sea-level rise, see details in the **Climate report** (Sections 2.2.4, 4.1.3 and 4.3.3).

##### **Used in model or assessment activity**

The data are used in the landscape development model (Brydsten and Strömberg 2013).

##### **Data used**

Data on the evolution of relative shore-level for the *global warming*, *early periglacial* and *extended global warming* climate cases are illustrated in the **Climate report** (Figure 4-6). The numerical data used can be found in SKBdoc 1359616, 1359610 and 1433163.

### 5.2 AMF Number 18

---

<b>Output from AMF activity</b> Climate cases representing prolonged interglacial conditions	<b>Input to AMF activity</b> Hydrogeology
---	--

---

**Dataset**  
Maximum permafrost depth (m)  
Shore-level evolution

---

#### 5.2.1 Maximum permafrost depth

##### **Short description of data**

The dataset contains maximum permafrost depth for the period of periglacial climate domain in the *early periglacial climate case* from 17,500 AD to 20,500 AD.

##### **Source of data**

Brandefelt et al. (2013) combined climate modelling and permafrost modelling to investigate the potential for permafrost at Forsmark in the next 60,000 years. The study focuses on the expected

periods of minimum in the summer insolation at high northern latitudes at around 19,000 years AD and 56,000 years AD. The study is described in the **Climate report** (Sections 2.1.4 and 4.2.4)

#### **Used in model or assessment activity**

The result that frozen ground cannot be excluded in Forsmark around 19,000 AD was used to guide the choice of hydro-geological simulations performed for Forsmark, see Odén et al. (2014) and Vidstrand et al. (2014).

#### **Data used**

Brandefelt et al. (2013) concluded that frozen bedrock conditions cannot be excluded at SFR repository depth at 19,000 years AD.

### **5.2.2 Shore-level evolution**

#### **Short description of data**

The dataset contains relative shore-level evolution at Forsmark for the next 100,000 years in Forsmark. Relative shore-level is defined as the vertical distance between the shore-level at a specific time and the average shore level at present.

#### **Source of data**

Relative shore-level for the climate cases representing prolonged interglacial conditions were defined based on global isostatic model simulations, extrapolations of up-to-present Holocene isostatic uplift rates at the Forsmark site, and peer-review-published data on future sea-level rise, see details in the **Climate report** (Sections 2.2.4, 4.1.3 and 4.3.3).

#### **Used in models, assessments, scenarios, and calculation cases**

The data are used in the hydro-geological simulations performed for Forsmark, see Odén et al. (2014) and Vidstrand et al. (2014).

#### **Data used**

Data on the evolution of relative shore-level for the *global warming*, *early periglacial* and *extended global warming* climate cases are illustrated in the **Climate report** (Figure 4-6). The numerical data used can be found in SKBdoc 1359616, 1359610 and 1433163.

## **5.3 AMF Number 65**

---

#### **Output from AMF activity**

Climate cases representing prolonged interglacial conditions

#### **Input to AMF activity**

Freezing of concrete

---

#### **Dataset**

Lowest bedrock temperature at repository depth

---

### **5.3.1 Lowest bedrock temperature at repository depth**

#### **Short description of data**

The dataset contains maximum bedrock isotherm depths for the period of periglacial climate domain in the *early periglacial climate case* from 17,500 AD to 20,500 AD.

### **Source of data**

Brandefelt et al. (2013) combined climate modelling and permafrost modelling to investigate the potential for permafrost at Forsmark in the next 60,000 years. The study focuses on the periods of minimum in the summer insolation at high northern latitudes that will occur at around 19,000 years AD and 56,000 years AD. The study is described in the **Climate report** (Sections 2.1.4 and 4.2.4).

### **Used in model or assessment activity**

The data are used in the judgement of when the transport properties of concrete deteriorate due to internal freezing of the concrete barriers.

### **Data used**

Brandefelt et al. (2013) concluded that frozen ground (a ground temperature of less than 0°C) cannot be excluded at SFR repository depth at 19,000 years AD. They further conclude that a ground temperature of -3°C or less is very unlikely to occur at repository depth during this period.

## **5.4 AMF Number 66**

<b>Output from AMF activity</b> Minimum air temperature in next 60,000 years	<b>Input to AMF activity</b> Potential for permafrost
<b>Dataset</b> Monthly mean air temperature at 2 m height	

### **5.4.1 Monthly mean air temperature at 2 m height**

#### **Short description of data**

The dataset contains the minimum monthly-mean air temperatures at 2 m height in Forsmark in the next 60,000 years.

#### **Source of data**

The Earth System Model of Intermediate Complexity LOVECLIM (**Model summary report**) was set up with forcing conditions representing the period 54,000 years after present and a glacial atmospheric CO<sub>2</sub> concentration of 180 ppmv (Brandefelt et al. 2013). With this setup, the model was run for 10,000 years. In the **Climate report**, monthly mean air temperature from this simulation is presented and justified as minimum temperatures for the coming 60,000 years.

#### **Used in model or assessment activity**

The data are used in assessing the potential for sub-freezing bedrock temperatures at repository depth. This is further described in the **Climate report**.

#### **Data used**

The numerical data used can be found in SKBdoc 1433269. The used dataset is displayed in Brandefelt et al. (2013, Figure 3-20).

## 5.5 AMF Number 67

---

<b>Output from AMF activity</b> Denudation modelling	<b>Input to AMF activity</b> Weichselian surface denudation
---	--

---

<b>Dataset</b> Weichselian surface denudation
--

---

### 5.5.1 Weichselian surface denudation

#### **Short description of data**

The dataset contains estimates of surface denudation rates for the Forsmark site in a 100,000 year time perspective.

#### **Source of data**

The data originate from a Geographical Information System (GIS) modelling study of denudation in a large region surrounding the Forsmark site, see the **Climate report** (Sections 2.4.4–2.4.6) and Olvmo (2010).

#### **Used in models, assessments, scenarios, and calculation cases**

The estimates of future surface denudation are used to describe the potential surface denudation for the *Weichselian glacial cycle* climate case.

#### **Data used**

The estimated denudation rates for the repository location at Forsmark are given in the **Climate report** (Table 2-8).

## 5.6 AMF Number 68

---

<b>Output from AMF activity</b> Paleo air temperature evolution	<b>Input to AMF activity</b> Weichselian ice sheet development
--	---

---

<b>Dataset</b> Proxy paleo-air temperature evolution
---

---

### 5.6.1 Proxy paleo-air temperature evolution

#### **Short description of data**

The dataset contains proxy paleo-air temperature for the last glacial cycle.

#### **Source of data**

The data were obtained from published results from the GRIP ice core (Dansgaard et al. 1993).

#### **Used in models, assessments, scenarios, and calculation cases**

The data were used for a model reconstruction of the ice sheet during the Weichselian glacial cycle. A detailed description of the dataset and its use in the ice sheet modelling procedure is found in the **Climate report** (Section 2.3.4) and in SKB (2010a, Section 3.1.4 and Appendix A).

#### **Data used**

The paleo-air temperature data are shown in the **Climate report** (Figures 2-49 and 2-51). The numerical data used can be found in SKB (2010a, Appendix A).

## 5.7 AMF Number 69

---

Output from AMF activity	Input to AMF activity
Weichselian ice sheet development	Weichselian shore-level evolution

---

**Dataset**  
Weichselian ice-sheet load development

---

### 5.7.1 Weichselian ice-sheet load development

#### **Short description of data**

The dataset contains a time series of ice load data for the Weichselian glacial cycle over Fennoscandia.

#### **Source of data**

The data were obtained from the ice sheet reconstruction of the Weichselian ice sheet described in the **Climate report** (Section 2.3.4) and in SKB (2010a, Section 3.1.4).

#### **Used in model or assessment activity**

The dataset was used for GIA (Glacial isostatic Adjustment) model simulations of shore-level changes for the Weichselian glacial cycle described in the **Climate report** (Section 2.2.4) and in Whitehouse (2009).

#### **Data used**

Examples of the associated ice sheet configurations are given in the **Climate report** (Figure 2-52). The numerical data used for the Weichselian ice-sheet load development can be found in SKBdoc 1433654.

## 5.8 AMF Number 72

---

Output from AMF activity	Input to AMF activity
Climate cases representing prolonged interglacial conditions	Surface hydrology

---

**Dataset**  
Shore-level evolution  
Wet and warm climate, precipitation  
Wet and warm climate, potential evapotranspiration  
Wet and warm climate, near-surface air temperature

---

### 5.8.1 Shore-level evolution

#### **Short description of data**

Relative shoreline displacement (m), due to the isostatic rebound, at 3000, 5000 and 11,000 AD, for the *global warming* and *early periglacial* climate cases.

#### **Source of data**

Details about the shore-level evolution are found in the **Climate report** (Sections 2.2.4, 4.1.3 and 4.3.3). The relative shore-level evolution for the complete 100,000 year assessment time-period is found in SKBdoc 1359616.

### **Used in model or assessment activity**

Used to describe the location of the average sea shoreline at 3000, 5000 and 11,000 AD (MIKE SHE regional models) and at 3000 AD (MIKE SHE local model) (Werner et al. 2013).

### **Data used**

See Source of data.

## **5.8.2 Wet and warm climate, precipitation**

### **Short description of data**

The dataset contains the maximum change in annual average precipitation rate in Forsmark for the initial interglacial period of the *global warming* and *extended global warming* climate cases. This period of temperate climate domain lasts for 50,000 years in the *global warming climate case* and for 100,000 years in the *extended global warming climate case*.

### **Source of data**

The dataset is obtained from Kjellström et al. (2009) and it is detailed in Bosson et al. (2010, Section 2.3, Figure 2-5).

### **Used in model or assessment activity**

The dataset is used as a sensitivity case in MIKE SHE models run for 5000 AD. For further details, see Werner et al. (2013).

### **Data used**

The data files used are stored at:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF72

## **5.8.3 Wet and warm climate, potential evapotranspiration**

### **Short description of data**

Daily sums of potential evapotranspiration, representing a wet and warm climate.

### **Source of data**

The dataset is obtained from Kjellström et al. (2009) and it is detailed in Bosson et al. (2010, Section 2.3, Figure 2-6).

### **Used in model or assessment activity**

The dataset is used as a sensitivity case in MIKE SHE models run for 5000 AD. For further details, see Werner et al. (2013).

### **Data used**

The data files used are stored at:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF72

## **5.8.4 Wet and warm climate, near-surface air temperature**

### **Short description of data**

Daily averages of near-surface air temperature, representing a wet and warm climate.

### **Source of data**

The dataset is obtained from Kjellström et al. (2009) and it is detailed in Bosson et al. (2010, Section 2.3).

### **Used in model or assessment activity**

The dataset is used as a sensitivity case in MIKE SHE models run for 5000 AD. For further details, see Werner et al. (2013).

### **Data used**

The data files used are stored at:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF72

## **5.9 AMF Number 74**

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Climate cases representing prolonged interglacial conditions	Freezing of bentonite
<b>Dataset</b>	
Maximum permafrost depth	

### **5.9.1 Maximum permafrost depth**

#### **Short description of data**

The dataset contains maximum permafrost depth for the period of periglacial climate domain in the *early periglacial climate case* from 17,500 AD to 20,500 AD.

#### **Source of data**

Brandefelt et al. (2013) combined climate modelling and permafrost modelling to investigate the potential for permafrost at Forsmark in the next 60,000 years. The study focuses on the expected periods of minimum in the summer insolation at high northern latitudes at around 19,000 years AD and 56,000 years AD. The study is described in the **Climate report** (Sections 2.1.4 and 4.2.4).

#### **Used in model or assessment activity**

The result that frozen ground cannot be excluded in Forsmark around 19,000 AD was used to guide the choice of Near-field simulations to be performed for Forsmark, see Abarca et al. (2013).

#### **Data used**

Brandefelt et al. (2013) concluded that frozen bedrock conditions cannot be excluded at SFR repository depth at 19,000 years AD.

## 5.10 AMF Number 128

---

<b>Output from AMF activity</b> Climate cases representing prolonged interglacial conditions	<b>Input to AMF activity</b> Ecosystem parameters and dose coefficients
---	--

---

**Dataset**  
Climate evolution

---

### 5.10.1 Climate evolution

#### **Short description of data**

The dataset is a summary of projections of the future and shore level evolution at Forsmark. The dataset include maximum temperature increase, timing of maximum temperature increase, timing of return to present temperature and maximum precipitation for the climate cases global warming and extended global warming. This period of temperate climate domain lasts for 50,000 years in the *global warming climate case* and for 100,000 years in the *extended global warming climate case*. The relative shore-level evolution at Forsmark is described for the next 100,000 years in Forsmark. Relative shore-level is defined as the vertical distance between the shore-level at a specific time and the average shore level at present.

#### **Source of data**

The climate cases representing prolonged interglacial conditions, i.e. the *global warming*, *early periglacial* and *extended global warming* climate cases, were defined to span the uncertainty range in future climate evolution associated with low, medium and high human carbon emissions, see the **Climate report** (Chapters 3 and 4). The period 52,000 AD to 102,000 AD in the *global warming* and *early periglacial* climate cases was defined to represent gradual cooling with intermittent ice-sheet build up in the Northern Hemisphere. The associated variability at Forsmark was defined based on the reconstructed Weichselian glacial cycle, see the **Climate report** (Chapters 3 and 4).

#### **Used in model or assessment activity**

These data are used to predict the future landscape at the site and the ecosystems of relevance to the safety assessment. The climate development was used to infer alternative parameter sets to different climate cases in biosphere radionuclide transport modelling (Saetre et al. 2013).

#### **Data used**

The numerical data used can be found in SKBdoc 1338745.

## 5.11 AMF Number 141

---

<b>Output from AMF activity</b> Literature survey – Future climate evolution	<b>Input to AMF activity</b> Climate cases representing prolonged interglacial conditions
---	--

---

**Dataset**  
Range of air temperature and precipitation change until 2100 AD  
Range of air temperature and precipitation evolution until 12,000 AD  
Range of climate evolution until 102,000 AD  
Minimum future projected atmospheric CO<sub>2</sub> concentration until 102,000 AD

---

### 5.11.1 Range of air temperature and precipitation change until 2100 AD

#### **Short description of data**

The dataset contains a range of possible near-surface air temperature and precipitation rate change until 2100 AD for Forsmark.

### **Source of data**

The data originate from a literature survey of current knowledge on the future climate evolution until 2100 AD presented in the **Climate report** (Section 3.3.3).

### **Used in model or assessment activity**

The range of future temperature and precipitation in Forsmark was used in the definition of the climate cases representing prolonged interglacial conditions, i.e. the *global warming climate case* (**Climate report**, Section 4.1), *early periglacial climate case* (**Climate report**, Section 4.2) and *extended global warming climate case* (**Climate report**, Section 4.3). The range of possible near-surface air temperature changes until 2100 AD for low, medium and high human carbon emissions given in the **Climate report** (Section 3.3) were used to represent the *global warming*, *early periglacial*, and *extended global warming* climate cases respectively, see the **Climate report** (Sections 4.1–4.3.)

### **Data used**

The change in near-surface air temperature and precipitation rate for 2081–2100 AD for Forsmark relative to the 1986–2005 AD reference period for low, medium and high human carbon emissions is given in the **Climate report** (Section 3.3.3) and in SKBdoc 1469758.

## **5.11.2 Range of air temperature and precipitation evolution until 12,000 AD**

### **Short description of data**

The dataset contains a range of possible near-surface air temperature and precipitation rate change until 2100 AD for Forsmark.

### **Source of data**

The temperature and precipitation change data originate from a literature survey of current knowledge on the future climate evolution until 12,000 AD, see the **Climate report** (Section 3.3.4).

### **Used in model or assessment activity**

See Section 5.11.1.

### **Data used**

The change in near-surface air temperature and precipitation rate for Forsmark for 12,000 AD relative to the 1986–2005 AD reference period for low, medium and high human carbon emissions is given in SKBdoc 1469758.

## **5.11.3 Range of climate evolution until 102,000 AD**

### **Short description of data**

The dataset contains a range of possible climate evolution until 102,000 AD for Forsmark.

### **Source of data**

The range of possible climate evolution originates from a literature survey of current knowledge on the future climate evolution until 102,000 AD, see the **Climate report** (Section 3.3.5). The survey focused on the timing of the next glacial inception, and the related question of when cold climate conditions may produce permafrost in the Forsmark region.

### **Used in model or assessment activity**

See Section 5.11.1.

### **Data used**

The timing of the next glacial inception in currently available scientific studies is given in the **Climate report** (Table 3-8 and Figure 3-30).

## **5.11.4 Minimum future projected atmospheric CO<sub>2</sub> concentration until 102,000 AD**

### **Short description of data**

The dataset contains minimum future projected atmospheric CO<sub>2</sub> concentrations until 102,000 AD.

### **Source of data**

The data originate from a literature survey of current knowledge on the future evolution of atmospheric CO<sub>2</sub> until 102,000 AD (see Section 3.3.1 in the **Climate report**).

### **Used in model or assessment activity**

The estimates of minimum future projected atmospheric CO<sub>2</sub> concentrations, in combination with results of permafrost and climate model simulations (Brandefelt et al. 2013 and Section 2.1.4 of the **Climate report**), were used in the definition of permafrost conditions for the climate cases representing prolonged interglacial conditions (see Section 4.2.4 in the **Climate report**).

### **Data used**

The minimum future projected atmospheric CO<sub>2</sub> concentration is given for 12,000 AD, 19,000 AD and 52,000 AD in SKBdoc 1469758.

## **5.12 AMF Number 142**

---

### **Output from AMF activity**

Weichselian ice-sheet development

### **Input to AMF activity**

Weichselian permafrost development

---

### **Dataset**

Reconstructed Weichselian air temperature evolution

---

## **5.12.1 Reconstructed Weichselian air temperature evolution**

### **Short description of data**

The dataset contains a time series of reconstructed air temperature for the last glacial cycle for Forsmark. For ice free periods, the temperature in the dataset constitutes air temperature whereas for ice covered periods the temperature constitutes basal ice temperatures.

### **Source of data**

The data were obtained from the ice sheet reconstruction of the Weichselian ice sheet described in the **Climate report** (Section 2.3.4) and in SKB (2010a, Section 3.1.4). Both air temperatures and basal ice temperatures were obtained from the ice sheet model.

### **Used in model or assessment activity**

The dataset was used for a reconstruction of geosphere temperatures (including permafrost and frozen ground conditions) from numerical permafrost modelling (**Climate report**, Section 2.1.4, SKB 2010a, Section 3.4.4, Hartikainen et al. 2010).

### **Data used**

The time series of reconstructed air temperature for the Weichselian glacial cycle for the Forsmark region are displayed in SKB (2010a, Figure 3-55). The numerical data used can be found in SKBdoc 1436252.

## **5.13 AMF Number 144**

---

### **Output from AMF activity**

Literature survey – Future sea-level evolution

### **Input to AMF activity**

Shore-level evolution

---

### **Dataset**

Range of future sea-level rise at Forsmark

---

### **5.13.1 Range of future sea-level rise at Forsmark**

#### **Short description of data**

The dataset contains a range of possible future sea-level rise for the next 10,000 years for Forsmark.

#### **Source of data**

The sea-level rise data originate from a literature survey of current knowledge on sea-level change associated with increased global average near-surface air temperature (**Climate report**, Section 3.3.4). To account for the uncertainty in future projected sea-level change, a maximum worst-case sea-level rise at Forsmark was calculated based on published estimates of the maximum contributions from ocean steric expansion, a complete melting of the Greenland and West Antarctic ice sheets and a complete melting of all glaciers and ice caps temperature (**Climate report**, Section 3.3.4).

#### **Used in model or assessment activity**

The uncertainty range associated with future sea-level rise was taken into account in the safety assessment in the *global warming climate case* and the *extended global warming climate case*, see the **Climate report** (Sections 4.1 and 4.3). The *global warming climate case* represents the lower end of the uncertainty range, with negligible effects of global sea-level rise, whereas the *extended global warming case* represents the upper end of the uncertainty range, see the **Climate report** (Sections 4.1.3 and 4.3.3). The two cases thus also represent a minimum length period of submerged conditions above SFR in the *global warming climate case* and a maximum length period of submerged conditions above SFR in the *extended global warming climate case*.

#### **Data used**

The maximum contributions to sea-level rise in the Baltic Sea are listed in the **Climate report** (Table 3-7).

## 5.14 AMF Number 188

---

<b>Output from AMF activity</b> Potential for permafrost	<b>Input to AMF activity</b> Climate cases representing prolonged interglacial conditions
---	--

---

**Dataset**  
Maximum depth of isotherms at repository location

---

### 5.14.1 Maximum depth of isotherms at repository location

#### *Short description of data*

The dataset contains maximum depths of the 0°C, -1°C, -2°C, -3°C, -4°C and -5°C isotherms at the repository location as a function of the annual average Forsmark air temperature at 2-metres height.

#### *Source of data*

Brandefelt et al. (2013) combined climate modelling and permafrost modelling to investigate the potential for permafrost at Forsmark in the next 60,000 years. The study focused on the expected periods of minimum in the summer insolation at high northern latitudes at c. 19,000 years AD and c. 56,000 years AD. A range of Earth System Model of Intermediate Complexity (EMIC) and Earth System model (ESM) simulations with a wide range of atmospheric CO<sub>2</sub> concentrations and insolation distributions for the next 60,000 years was performed. The study is described in Brandefelt et al. (2013) and in the **Climate report** (Sections 2.1.4 and 4.2.4)

#### *Used in model or assessment activity*

The results of the permafrost modelling simulations and climate model simulations, in combination with estimates of future atmospheric CO<sub>2</sub> concentrations in the periods around 19,000 AD and 54,000 AD given in the **Climate report** (Section 3.3.1 and 4.1.4), were used in the definition of permafrost conditions in the climate cases representing prolonged interglacial conditions, see the **Climate report** (Section 4.2.4).

#### *Data used*

The maximum depths of the 0°C, -1°C, -2°C, -3°C, -4°C and -5°C isotherms at the repository location is given in the **Climate report** (Figure 2-11) as a function of the annual average Forsmark air temperature at 2-metres height. The numerical data used can be found in SKBdoc 1433270.

## 5.15 AMF Number 189

---

<b>Output from AMF activity</b> Surface denudation	<b>Input to AMF activity</b> Climate cases representing prolonged interglacial conditions
---	--

---

**Dataset**  
Maximum surface denudation rate

---

### 5.15.1 Maximum surface denudation rate

#### *Short description of data*

The dataset contains an estimate of the maximum denudation rate for a future climate evolution in Forsmark without presence of ice sheets.

### **Source of data**

The data originate from a Geographical Information System (GIS) modelling study of denudation described in Olvmo (2010) and in the **Climate report** (Section 2.4.4).

### **Used in model or assessment activity**

The data are used in the definition of maximum denudation during the next 100,000 years in the climate cases representing prolonged interglacial conditions, see the **Climate report** (Sections 4.1.5, 4.2.5 and 4.3.5).

### **Data used**

The data used are given in the **Climate report** (Section 2.4.6 and Table 2-8)

## **5.16 AMF Number 190**

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Shore-level evolution	Climate cases representing prolonged interglacial conditions
<b>Dataset</b>	
Shore-level evolution for a future warm climate	

### **5.16.1 Shore-level evolution for a future warm climate**

#### **Short description of data**

The dataset contains relative shore-level evolution at Forsmark for the next 100,000 years in Forsmark. Relative shore-level is defined as the vertical distance between the shore-level at a specific time and the average shore level at present.

#### **Source of data**

Relative shore-level for a future warm climate was defined based on Glacial Isostatic Adjustment (GIA) model simulations, extrapolations of up-to-present Holocene isostatic uplift rates at the Forsmark site, and peer-review-published data on future sea-level rise, see details in the **Climate report**, (Sections 2.2.4, 4.1.3 and 4.3.3).

#### **Used in model or assessment activity**

The data were used in the definition of the relative shore-level evolution in the climate cases representing prolonged interglacial conditions.

#### **Data used**

Data on the evolution of relative shore-level in a future warm climate is illustrated in the **Climate report** (Figure 2-37). The numerical data used are found in SKBdoc 1359616.

## 5.17 AMF Number 191

---

### Output from AMF activity

Weichselian glacial cycle climate case representing natural variability

### Input to AMF activity

Climate cases representing prolonged interglacial conditions

---

### Dataset

Weichselian glacial cycle climate case ice-sheet evolution  
Weichselian glacial cycle climate case geosphere temperature evolution  
Weichselian glacial cycle climate case shore-level evolution  
Weichselian glacial cycle climate case evolution of climate domains

---

### 5.17.1 Weichselian glacial cycle climate case ice-sheet evolution

#### **Short description of data**

The dataset contains ice-sheet thickness at Forsmark for the period 2000 AD to 52,000 AD as defined in the *Weichselian glacial cycle climate case* representing natural variability.

#### **Source of data**

The data were obtained from numerical ice sheet simulations made for the reconstruction of Weichselian conditions described in the **Climate report** (Section 2.3.4) and in SKB (2010a, Section 3.1.4).

#### **Used in model or assessment activity**

The data was used for the definition of ice-sheet thickness evolution for the period 52,000 AD to 102,000 AD in the *global warming* and *early periglacial* climate cases (**Climate report**, Sections 4.1.2 and 4.2.2).

#### **Data used**

See Source of data.

### 5.17.2 Weichselian glacial cycle climate case geosphere temperature evolution

#### **Short description of data**

The dataset contains geosphere temperature evolution at Forsmark, including development of permafrost and frozen depths, for the period 2,000 AD to 52,000 AD as defined in the *Weichselian glacial cycle climate case* representing natural variability. The dataset also contains information on freeze-out of salt during periods of geosphere freezing as well as the development of taliks along the investigated profile.

#### **Source of data**

The data was obtained from numerical permafrost simulations made for the reconstruction of Weichselian conditions described in the **Climate report** (Section 2.1.4), SKB (2010a, Section 3.4.4) and in Hartikainen et al. (2010).

#### **Used in model or assessment activity**

The data was used for the definition of permafrost development for the period 52,000 AD to 102,000 AD in the *global warming* and *early periglacial* climate cases (**Climate report**, Sections 4.1.4 and 4.2.4).

#### **Data used**

Examples of the used data are given in SKB (2010a, Figure 3-56).

### 5.17.3 Weichselian glacial cycle climate case shore-level evolution

#### **Short description of data**

The dataset contains a time series of shore-level variations for the *Weichselian glacial cycle climate case* representing natural variability.

#### **Source of data**

The data were mainly obtained from numerical GIA (Glacial Isostatic Adjustment) simulations made for the reconstruction of Weichselian conditions described in the **Climate report** (Section 2.2.4), (SKB 2010a, Section 3.3.4) and in Whitehouse (2009). For the initial few thousands of years, extrapolated data from Holocene data were used (Påsse 2001), see the **Climate report** (Section 2.2.4).

#### **Used in models, assessments, scenarios, and calculation cases**

The data were used for the definition and description of the shore-level development in the Weichselian glacial cycle climate case (**Climate report**, Section 4.4.3).

#### **Data used**

The data on shore-level development are shown in the **Climate report** (Figure 4-11).

### 5.17.4 Weichselian glacial cycle climate case evolution of climate domains

#### **Short description of data**

The dataset contains the evolution of climate domains defined for years 2000 AD to 52,000 AD of the *Weichselian glacial cycle climate case* representing natural variability.

#### **Source of data**

The data originate from the combination of permafrost, glacial isostatic adjustment (GIA) and ice-sheet modelling for the last glacial cycle, described in the **Climate report** (Sections 2.1.4, 2.2.4 and 2.2.3) and in Olvmo (2010).

#### **Used in model or assessment activity**

The data were used to define the succession of climate domains for the period 52,000 AD to 102,000 AD in the *global warming* and *early periglacial* climate cases (**Climate report**, Sections 4.1.5 and 4.2.5).

#### **Data used**

The data on evolution of climate domains are shown in the **Climate report** (Figure 4-18). Numerical data used can be found in the following documents:

- Weichselian glacial cycle climate case ice-sheet thickness and temperature evolution (SKBdoc 1437317)
- Weichselian glacial cycle climate case geosphere temperature evolution (SKBdoc 1437319)
- Weichselian glacial cycle climate case shore-level evolution (SKBdoc 1437321)
- Weichselian glacial cycle climate case development of climate domains (SKBdoc 1338361)

## 5.18 AMF Number 192

---

Output from AMF activity	Input to AMF activity
Weichselian permafrost development	Weichselian glacial cycle climate case representing natural variability

---

**Dataset**  
Reconstructed Weichselian geosphere temperature development

---

### 5.18.1 Reconstructed Weichselian geosphere temperature development

#### *Short description of data*

The dataset contains a time series of reconstructed geosphere temperatures for the last glacial cycle for Forsmark, including development of permafrost and frozen depths. The dataset also contains information on freeze-out of salt during periods of geosphere freezing as well as the development of taliks along the investigated profile.

#### *Source of data*

The data were obtained from numerical permafrost simulations made for the reconstruction of Weichselian conditions (**Climate report**, Section 2.1.4, SKB 2010a, Section 3.4.4, Hartikainen et al. 2010).

#### *Used in model or assessment activity*

The data were used for the definition and description of the permafrost development in the Weichselian glacial cycle climate case (**Climate report**, Section 4.4.3).

#### *Data used*

Examples of the used data are seen in SKB (2010a, Figures 3-56 and 3-68). The numerical data used for the Weichselian ice-sheet thickness and temperature development can be found in SKBdoc 1265613.

## 5.19 AMF Number 193

---

Output from AMF activity	Input to AMF activity
Weichselian ice-sheet development	Weichselian glacial cycle climate case representing natural climate variability

---

**Dataset**  
Weichselian ice-sheet thickness and temperature development

---

### 5.19.1 Weichselian ice-sheet thickness and temperature development

#### *Short description of data*

The dataset contains a time series of reconstructed ice sheet thickness for the last glacial cycle for Forsmark, including ice temperatures and timings of ice sheet coverage over Forsmark.

#### *Source of data*

The data was obtained from numerical ice sheet simulations made for the reconstruction of Weichselian conditions (**Climate report**, Section 2.3.4, SKB 2010a, Section 3.1.4).

#### *Used in model or assessment activity*

The data was used for the definition and description of the ice sheet development in the Weichselian glacial cycle climate case (**Climate report**, Section 4.4.2).

### **Data used**

An example of data used on ice sheet thickness is given in the **Climate report** (Figure 3-21). The numerical data used can be found in SKBdoc 1436190.

## **5.20 AMF Number 194**

---

### **Output from AMF activity**

Weichselian shore-level evolution

### **Input to AMF activity**

Weichselian glacial cycle climate case representing natural climate variability

---

### **Dataset**

Reconstructed Weichselian shore-level evolution

---

### **5.20.1 Reconstructed Weichselian shore-level evolution**

#### **Short description of data**

The dataset contains a time series of reconstructed shore-level variations for the last glacial cycle for Forsmark.

#### **Source of data**

The data were mainly obtained from numerical GIA (Glacial Isostatic Adjustment) simulations made for the reconstruction of Weichselian conditions described in the **Climate report** (Section 2.2.4), (SKB 2010a, Section 3.3.4) and in Whitehouse (2009). For the initial few thousands of years, extrapolated data from Holocene data were used (Påsse 2001), see the **Climate report** (Section 2.2.4).

#### **Used in model or assessment activity**

The data were used for the definition and description of the shore-level development in the Weichselian glacial cycle climate case (**Climate report**, Section 4.4.3).

### **Data used**

The data used on shore-level development are shown in the **Climate report** (Figure 3-20). The numerical data used can be found in SKBdoc 1436249.

## **5.21 AMF Number 195**

---

### **Output from AMF activity**

Weichselian surface denudation

### **Input to AMF activity**

Weichselian glacial cycle climate case representing natural climate variability

---

### **Dataset**

Weichselian surface denudation

---

### **5.21.1 Weichselian surface denudation**

#### **Short description of data**

The dataset contains estimates of surface denudation rates for the Forsmark site in a 100,000 year time perspective.

### **Source of data**

The data originate from a Geographical Information System (GIS) modelling study of denudation in a large region surrounding the Forsmark site described in the **Climate report** (Sections 2.4.4–2.4.6) and in Olvmo (2010).

### **Used in model or assessment activity**

The estimates of future surface denudation are used to describe the potential surface denudation for the *Weichselian glacial cycle* climate case.

### **Data used**

The estimated denudation rates for the repository location at Forsmark are given in the **Climate report** (Table 2-8).

## **5.22 AMF Number 196**

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Weichselian glacial cycle climate case representing natural climate variability	RN transport and dose
<b>Dataset</b>	
Weichselian glacial cycle climate case ice-sheet development	
Weichselian glacial cycle climate case shore-level evolution	

### **5.22.1 Weichselian glacial cycle climate case ice-sheet development**

#### **Short description of data**

The dataset contains ice-sheet thickness at Forsmark as reconstructed for the last glacial cycle.

#### **Source of data**

The *Weichselian glacial cycle climate case* was defined based on a reconstructed evolution of climate and climate-related issues for the last glacial cycle, see the **Climate report** (Sections 2.3.4 and 4.4). The evolution of ice-sheet thickness at Forsmark was determined based on simulations with the UMISM ice-sheet model, see the **Climate report** (Section 2.3.4).

#### **Used in model or assessment activity**

The timing of the first future deglaciation of Forsmark (around 68,000 years AD) is used in the calculation case glacial conditions in which submerged conditions are assumed at 68,000 AD (the calculation is further described in the **Radionuclide transport report**).

#### **Data used**

The data used on ice-sheet thickness over Forsmark in the *Weichselian glacial cycle climate case* is displayed in the **Climate report** (Figure 4-10).

### **5.22.2 Weichselian glacial cycle climate case shore-level evolution**

#### **Short description of data**

The dataset contains shore-level evolution at Forsmark as reconstructed for the last glacial cycle.

### Source of data

The *Weichselian glacial cycle climate case* was defined based on the reconstructed evolution of climate and climate-related issues for the last glacial cycle, see the **Climate report** (Sections 2.3.4 and 4.4). The first few thousands of years of the future period are based on extrapolated observed relative sea-level data (Påsse 2001) whereas from about 10,000 years AD and onwards the time series is constructed from Glacial Isostatic Adjustment (GIA) modelling, see the **Climate report** (Section 2.2.4).

### Used in model or assessment activity

See Section 5.22.1.

### Data used

The data used on shore-level evolution at Forsmark in the *Weichselian glacial cycle climate case* is displayed in the **Climate report** (Figure 4-11). Detailed references to where numerical data can be found are given in the following documents:

- Weichselian glacial cycle climate case ice-sheet development (SKBdoc 1471889).
- Weichselian glacial cycle climate case shore-level evolution (SKBdoc 1471890).

The used data are stored in the file:

svn.skf.se/trac/projekt/browser/SFR/SR-PSU/Indata/Climate/Shore level data Forsmark reference evolution and Global warming climate case.xlsx

## 5.23 AMF Number 198

Output from AMF activity	Input to AMF activity
Geothermal heat flux	Weichselian ice-sheet development
<b>Dataset</b>	
Geothermal heat flux	

### 5.23.1 Geothermal heat flux

#### Short description of data

The dataset contains a distributed dataset on geothermal heat flux over northern Europe, including high-resolution data for Sweden and Finland.

#### Source of data

The high resolution data for Sweden and Finland was calculated from detailed datasets of  $\gamma$ -emission measurements from bedrock and till (see the **Climate report**, Section 2.3.2 and Näslund et al. 2005). The surrounding low resolution data were interpolated from drill-hole data (**Climate report**, Section 2.3.2 and Pollack et al. 1991).

#### Used in model or assessment activity

The dataset was used as input to the thermo dynamical ice sheet modelling made for reconstructing the Weichselian ice sheet (**Climate report**, Section 2.3.4)

#### Data used

The data used on geothermal heat flux are shown in the **Climate report** (Figure 2-45). Numerical data used can be found in SKBdoc 1433662.

## 5.24 AMF Number 200

---

<b>Output from AMF activity</b> Digital elevation data ETOPO2	<b>Input to AMF activity</b> Weichselian ice-sheet development
<b>Dataset</b> Digital elevation	

---

### 5.24.1 Digital elevation

#### **Short description of data**

The dataset contains global digital elevation data, including bathymetry, with a 2×2 minute resolution. For the present assessment data were extracted for northern Europe.

#### **Source of data**

The data were obtained from the National Geophysical Data Center (NGDC) ETOPO2 Global 2' Elevations dataset (ETOPO2 2001).

#### **Used in model or assessment activity**

The dataset was used as input to the thermo dynamical ice sheet modelling made for reconstructing the Weichselian ice sheet (**Climate report**, Section 2.3.4)

#### **Data used**

Digital elevation data (2x2 minute resolution) for Northern Europe from the ETOPO 2 data base (ETOPO2 2001). The dataset was originates from <http://www.ngdc.noaa.gov/mgg/global/etopo2.html> and can be found in SKBdoc 1469820 with a description of the dataset in SKBdoc 1469822.

## 5.25 AMF Number 203

---

<b>Output from AMF activity</b> Weichselian landscape modelling	<b>Input to AMF activity</b> Weichselian permafrost development
<b>Dataset</b> Future vegetation and surface cover types Future lakes	

---

### 5.25.1 Future vegetation and surface cover types

#### **Short description of data**

The dataset contains the evolution of future vegetation and surface cover types.

#### **Source of data**

The data are given in Hartikainen et al. (2010, Appendix J).

#### **Used in model or assessment activity**

Weichselian permafrost development at Forsmark during the period from 115,000 years ago to 70,000 years ago was modelled with a numerical permafrost model in a 2D vertical cross-section (Hartikainen et al. 2010), as described in the **Climate report** (Section 2.1.4)

The results of these 2D permafrost model simulations were utilised, together with the 1D permafrost simulations that were made for the full glacial cycle, in the definition and description of the *Weichselian glacial cycle climate case* representing natural variability, see the **Climate report** (Section 4.5).

#### **Data used**

See Source of data.

### **5.25.2 Future lakes**

#### **Short description of data**

The dataset contains the evolution of future lakes.

#### **Source of data**

The evolution of future lakes in the Forsmark area was determined for the next 45,000 years from simulations with a landscape model (Brydsten 2006). These data were used to represent the period from 115,000 years ago until 70,000 years ago.

#### **Used in model or assessment activity**

Permafrost development at Forsmark was modelled with a numerical permafrost model in a 2D vertical cross-section (Brandefelt et al. 2013), as described in the **Climate report**.

The results of these 2D permafrost model simulations were utilised in the definition of the two of the Climate cases representing prolonged interglacial conditions, the *global warming* and *early periglacial* climate cases, see the **Climate report** (Sections 4.2 and 4.3).

#### **Data used**

The used data are described in Hartikainen et al. (2010, Appendix I).

## **5.26 AMF Number 204**

---

#### **Output from AMF activity**

Weichselian surface denudation

#### **Input to AMF activity**

Surface denudation

---

#### **Dataset**

Weichselian denudation rate

---

### **5.26.1 Weichselian denudation rate**

#### **Short description of data**

The dataset contains estimates of surface denudation rates for the Forsmark site in a 100,000 year time perspective.

#### **Source of data**

The data originate from a Geographical Information System (GIS) modelling study of denudation in a large region surrounding the Forsmark site described in the **Climate report** (Sections 2.4.4–2.4.6) and in Olvmo (2010).

### **Used in model or assessment activity**

The estimates of future surface denudation were used, in combination with the succession of climate domains, to describe the potential surface denudation for the Climate cases representing prolonged interglacial conditions.

### **Data used**

The estimated denudation rates for the repository location at Forsmark are given in the **Climate report** (Table 2-8).

## **5.27 AMF Number 210**

---

### **Output from AMF activity**

Minimum air temperature in next 60,000 years

### **Input to AMF activity**

Climate cases representing prolonged interglacial conditions

---

### **Dataset**

Minimum Forsmark air temperature at 2-metres height

---

### **5.27.1 Minimum Forsmark air temperature at 2-metres height**

#### **Short description of data**

The dataset contains the minimum annual average air temperatures at 2 m height in Forsmark for the periods of minimum in the summer insolation at high northern latitudes at c. 19,000 years AD and c. 56,000 years AD as a function of the atmospheric CO<sub>2</sub> concentration.

#### **Source of data**

Brandefelt et al. (2013) combined climate modelling and permafrost modelling to investigate the potential for permafrost at Forsmark in the next 60,000 years. The study focuses on the expected periods of minimum in the summer insolation at high northern latitudes at around 19,000 years AD and 56,000 years AD. A range of Earth System Model of Intermediate Complexity (EMIC) and Earth System model (ESM) simulations with a wide range of atmospheric CO<sub>2</sub> concentrations and insolation distributions for the next 60 ka was performed. The results of the climate model simulations were combined with estimates of the uncertainty in the results due to future glacier and ice-sheet growth, inter-model differences, internal variability and future atmospheric greenhouse gas concentrations, in order to estimate the coldest feasible near-surface air temperature in Forsmark in the periods around 19,000 AD and 56,000 AD. The study is described in Brandefelt et al. (2013) and in the **Climate report** (Sections 2.1.4 and 4.2.4).

### **Used in model or assessment activity**

The results of the permafrost modelling simulations and climate model simulations, in combination with estimates of future atmospheric CO<sub>2</sub> concentrations in the periods around 19,000 AD and 54,000 AD, given in the **Climate report** (Sections 3.3.1 and 4.1.4) were used in the description of permafrost conditions in the climate cases representing prolonged interglacial conditions, see the **Climate report** (Section 4.2.4).

### **Data used**

The minimum annual average bias-corrected Forsmark T<sub>2m</sub> when all uncertainties are taken into account is given in the **Climate report** (Table 2-2).

## 6 Biosphere

### 6.1 AMF Number 1

Output from AMF activity	Input to AMF activity
Landscape modelling	Hydrogeology
<b>Dataset</b>	
Bedrock and regolith-layer geometrical data	
Development of lakes and streams	
Location of future talliks	

#### 6.1.1 Bedrock and regolith-layer geometrical data

##### **Short description of data**

The data define the evolution of the areal distribution, elevation, and thickness of the regolith layers.

##### **Source of data**

The data are delivered from the regolith development model (RDM) described in Brydsten and Strömngren (2013). The data define areal distribution, elevation, and thickness of regolith layers at given time slices. Data are given for 7 selected time slices (2000, 2500, 3000, 3500, 5000, 7000, and 9000 AD).

##### **Used in model or assessment activity**

The data are used in all hydrogeological simulations (Td08, Td11, Td12, and Td13), to reflect the prevailing hydrogeological conditions at studied time slices. The 7000 AD data are not used in hydrogeological modelling. The data are used in the SR-PSU safety assessment for:

1. Geometrically define: a) ground surface and b) bedrock surface in the discretised grid.
2. Prescribe local head: a) lakes, b) rivers and c) mixed-boundary condition approach.
3. Numerically implement sediment-layer parameterisation.
4. Visualisation of output in context with topography.

##### **Data used**

The datasets specified in Table 6-1 are stored in SKB GIS database. The Static regolith model is stored in: GIS#12\_08 and the Dynamic regolith model: GIS#12\_09.

#### 6.1.2 Development of lakes and streams

##### **Short description of data**

The dataset contains the evolution of the areal extension of lakes and streams.

##### **Source of data**

The data are delivered from the lake development model (RLDM) described in Brydsten and Strömngren (2013). The data define areal extension of lakes and rivers at given time slices. Data are delivered for 7 selected time slices (2000, 2500, 3000, 3500, 5000, 7000, and 9000 AD).

1. RLDM lake geometry in ArcGIS shape vector format (lakes\_<time slice>) for time slices 2000, 2500, 3000, 3500, 5000, 7000, and 9000 AD. Each ArcGIS shape object consists of a quadruplet of files with extension \*.shp, \*.dbf, \*.sbx, and \*.sbn.
2. RLDM geometry of streams and basins is originally stored in ArcGIS shape vector format, however exported in data-point ASCII format (element-ordered nodes), by Ulf Brising, to facilitate handling outside ArcGIS.

**Table 6-1. Regolith data files delivered from RLDM.**

Filenames <sup>1)</sup>	Description	Usage
pdem<time slice>.asc pdem<time slice>.xyz	Upper peat surface elevation (m).	HSD parameterisation Point data used for basin filling, defining lake/river objects, grid generation.
lpgd<time slice>.asc	The upper surface of lacustrine accumulation of postglacial deposits, elevation (m).	HSD parameterisation
mpgd<time slice>.asc	The upper surface of marine accumulation of post glacial deposits, elevation (m).	HSD parameterisation
gkl<time slice>.asc	The upper surface of glacial clay, elevation (m).	HSD parameterisation
fill<time slice>.asc	The upper surface of filling, elevation (m).	HSD parameterisation
glfl<time slice>.asc	The upper glaciofluvial-material surface elevation (m).	HSD parameterisation
till<time slice>.asc	The upper till surface elevation (m).	HSD parameterisation
bedr<time slice>.asc bedr<time slice>.xyz	The upper bedrock surface, level in the height system RH 70 (m). The level has been corrected for all layers from –8000 AD to 55,000 AD using the Sea shoreline curve for the reference scenario.	HSD parameterisation Point data not used <sup>2)</sup>

<sup>1)</sup> Delivered for <time slice>: 2000 AD, 2500 AD, 3000 AD, 3500 AD, 5000 AD, 7000 AD, and 9000 AD. Extensions \*.asc are in GIS ESRI ASCII raster format, while \*.xyz is in point-data ASCII format.

<sup>2)</sup> Owing to a “fixed-bedrock” convention used, the bedrock surface is modelled as static. The bedrock surface is therefore defined by the original definition in the static regolith model (bedrock\_up\_v2\_2000AD.xyz), GIS #12\_08.

### **Used in model or assessment activity**

The data are used in all hydrogeological simulations (Td08, Td11, Td12, and Td13), to reflect the prevailing hydrogeological conditions at studied time slices. The 7000 AD data are not used in hydrogeological modelling.

The data are used in the SR-PSU safety assessment for:

1. Prescribed head at model top boundary.
2. Visualisation in context of particle exit locations.

### **Data used**

The RLDM lake geometry in ArcGIS shape vector format described in section source of data above is stored at: svn:\SR-PSU\Synthesis\Leveranser\Leverans\_tidssteg\_geosigma

RLDM geometry of streams and basins is stored in SKB GIS database according to Table 6-2.

Used files are described in (vattendrag\_SDEADM.UMEU\_FM\_GEO\_10171.txt) and (bassanger\_SDEADM.UMEU\_FM\_GEO\_10168.txt)

## **6.1.3 Location of future taliks**

### **Short description of data**

Data concerning location of future taliks are taken firstly from the results of the landscape evolution model for year 20,000 AD. The results of this model comprise predicted locations of streams and lakes large enough to fulfil talik formation criteria, i.e. approximate having the same or larger dimensions as a permafrost layer is thick. The second set of information is taken from the results of a groundwater flow model focusing on the surface water balance for a temperate landscape of the year 11,000 AD. These results comprise all surface water bodies deeper than 0.5 metres that is consistent over a hydrological year.

### **Source of data**

Landscape development in the Forsmark area from the past into the future (8,500 BC – 40,000 AD) relevant for 20,000 AD is found in Brydsten and Strömngren (2013).

Surface hydrology data relevant for 11,000 AD results are found in Werner et al. (2013).

**Table 6-2. Datasets in SKB GIS database used in the modelling.**

Name	Title (in Swedish)	Data type
SDEADM.UMEU_FM_GEO_9124	Modellerad överyta för fyllning (Z3c). För Variant 1.	R
SDEADM.UMEU_FM_GEO_9148	Modellerad överyta för glaciallera (Z4b). För Variant 2.	R
SDEADM.UMEU_FM_GEO_9145	Modellerad överyta för isälvsmaterial (Z3b). För Variant 2.	R
SDEADM.UMEU_FM_GEO_9122	Modellerad överyta för sand/grus (Z3a). För Variant 1.	R
SDEADM.UMEU_FM_GEO_9150	Modellerad överyta för ytnära berg (Z6). För Variant 2.	R
SDEADM.UMEU_FM_GEO_9103	Modellerad överyta för berg. För Varian 1 och Variant 2.	R
SDEADM.UMEU_FM_GEO_9147	Modellerad överyta för lergyttja (Z4a). För Variant 2.	R
SDEADM.UMEU_FM_GEO_9121	Modellerad överyta för torv. (Z2) För Variant 1.	R
SDEADM.UMEU_FM_GEO_9142	Modellerad överyta för ytlager (Z1). För Variant 2.	R
SDEADM.UMEU_FM_GEO_9127	Modellerad överyta för morän (Z5). För Variant 1.	R
SDEADM.UMEU_FM_GEO_9146	Modellerad överyta för fyllning (Z3c). För Variant 2.	R
SDEADM.UMEU_FM_GEO_9123	Modellerad överyta för isälvsmaterial (Z3b). För Variant 1.	R
SDEADM.UMEU_FM_GEO_9149	Modellerad överyta för morän (Z5). För Variant 2.	R
SDEADM.UMEU_FM_GEO_9144	Modellerad överyta för sand/grus (Z3a). För Variant 2.	R
SDEADM.UMEU_FM_GEO_9126	Modellerad överyta för glaciallera (Z4b). För Variant 1.	R
SDEADM.UMEU_FM_GEO_9125	Modellerad överyta för lergyttja (Z4a). För Variant 1.	R
SDEADM.UMEU_FM_GEO_9143	Modellerad överyta för torv (Z2). För Variant 2	R

**Used in model or assessment activity**

The data are assessed in all simulations concerning permafrost and hydrogeology reported in Odén et al. (2014) and are detailed described therein (Table 6-4).

**Data used**

The used datasets are stored at: [svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Synthesis/Leveranser/\\_25\\_Talik\\_input/Talik\\_input](https://svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Synthesis/Leveranser/_25_Talik_input/Talik_input)

**6.2 AMF Number 20**

Output from AMF activity	Input to AMF activity
Site specific data	Landscape modelling
<b>Dataset</b>	
Present day topography and bathometry	

**6.2.1 Present day topography and bathometry****Short description of data**

The digital elevation model (DEM) for the Forsmark area describes the topography in the terrestrial area and the bathometry in lakes and the sea. The DEM is important as input for further modelling within the safety assessment. Such models include, e.g. hydrology, Quaternary deposits and land use.

**Source of data**

A thorough description of the construction of the DEM is found in Brydsten and Strömgren (2013).

**Used in model or assessment activity**

The DEM is used in the regolith depth model (RDM) and the regolith lake development model (RLDM).

**Data used**

The data used are stored in the SKB's GIS database (SDE) at: SDEADM.UMEU\_FM\_HOJ\_8741.

## 6.3 AMF Number 22

---

Output from AMF activity	Input to AMF activity
Site specific data	Surface hydrology

---

**Dataset**  
Present-day climate, precipitation  
Present-day climate, potential evapotranspiration  
Present-day climate, near-surface air temperature  
Present-day sea level

---

### 6.3.1 Present-day climate, precipitation

#### *Short description of data*

Daily sums of measured precipitation (mm) from the meteorological station Högmasten during the period 2003-05-15–2010-12-31.

#### *Source of data*

The precipitation dataset from the meteorological station Högmasten station is presented in Werner et al. (2014, Chapter 2).

#### *Used in model or assessment activity*

The precipitation dataset is used in MIKE SHE models run for present-day climate conditions is given in Werner et al. (2013, Chapter 4), and the datasets used in MIKE SHE models run for 3000, 5000, and 11,000 AD are given in Werner et al. (2013, Chapter 5).

#### *Data used*

The data used are stored in files located at:  
[svn.skb.se/projekt/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF22](http://svn.skb.se/projekt/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF22)

### 6.3.2 Present-day climate, potential evapotranspiration

#### *Short description of data*

Daily sums of calculated potential evapotranspiration (mm) from the meteorological station Högmasten during the period 2003-05-15–2010-12-31.

#### *Source of data*

The potential evapotranspiration dataset from the meteorological station Högmasten is presented in Werner et al. (2014, Chapter 2).

#### *Used in model or assessment activity*

The potential evapotranspiration dataset is used in MIKE SHE models run for present-day climate conditions is given in Werner et al. (2013, Chapter 4), and the datasets used in MIKE SHE models run for 3000, 5000, and 11,000 AD are given in Werner et al. (2013, Chapter 5).

#### *Data used*

The data used are stored in files located at:  
[svn.skb.se/projekt/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF22](http://svn.skb.se/projekt/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF22)

### **6.3.3 Present-day climate, near-surface air temperature**

#### ***Short description of data***

Daily averages of measured near-surface air temperature (°C) from the meteorological station Högmasten during the period 2003-05-15–2010-12-31.

#### ***Source of data***

The near-surface air temperature dataset from the meteorological station Högmasten is presented in Werner et al. (2014, Chapter 2).

#### ***Used in model or assessment activity***

The near-surface air temperature dataset is used in MIKE SHE models run for present-day climate conditions (Werner et al. 2013, Chapter 4), and in MIKE SHE models run for 3000, 5000, and 11,000 AD (Werner et al. 2013, Chapter 5).

#### ***Data used***

The data used are stored in files located at:  
svn.skb.se/projekt/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF22

### **6.3.4 Present-day sea level**

#### ***Short description of data***

Daily averages of sea level (m elevation, RHB70) from the SKB sea-level gauging station PFM10038 during the period 2003-05-15–2010-12-31. Sea level is an input parameter to both the MIKE SHE model and the surface stream model MIKE11.

#### ***Source of data***

The sea-level dataset from the PFM10038 station is presented in Werner et al. (2014, Chapter 2).

#### ***Used in model or assessment activity***

The sea-level dataset is used as boundary condition in all MIKE SHE models with sea present within the model domain. The dataset is also used as downstream boundary conditions for MIKE 11 surface-flow models, which are coupled to the MIKE SHE models. For further details, see Werner et al. (2013).

#### ***Data used***

The data used are stored in files located at:  
svn.skb.se/projekt/SFR/SR-PSU/Indata/Hydrology/MIKESHE/AMF22

## 6.4 AMF Number 52

<b>Output from AMF activity</b> Landscape modelling	<b>Input to AMF activity</b> Surface hydrology
<b>Dataset</b> Regolith depth and stratigraphy models Site-specific hydrogeological properties of regolith types	

### 6.4.1 Regolith depth and stratigraphy models

#### *Short description of data*

Regolith depth and stratigraphy models are implemented in MIKE SHE to describe the regolith layers for the time slices for which MIKE SHE models were set up.

#### *Source of data*

The delivered data (GIS format) are from the landscape development model described in the **Biosphere synthesis report** and Brydsten and Strömngren (2013). The delivered data includes thickness of regolith layers in Forsmark for different climate cases and land-use variant described in the **Biosphere synthesis report** (Chapter 5).

#### *Used in model or assessment activity*

The data (thicknesses and lower levels of regolith layers) are used in MIKE SHE models run for present-day conditions, and in MIKE SHE models run for 3000, 5000 and 11,000 AD. For further details, see Werner et al. (2013).

#### *Data used*

Four datasets were produced and stored in SKB's GIS-database as the following deliveries.

1. The new regolith depth model variant 1 and 2 in the global warming case. The land-use variants are described in the **Biosphere synthesis report** (Chapter 5) and the delivered files are listed in Table 6-3.
2. GIS delivery ID C296, Global warming case with updated layers for peat for time points 3000 AD, 5000 AD and 11,000 AD.
3. GIS delivery ID C245, Weichsel case where thickness of regolith layers have been transformed to levels in xyz format for time points 2500, 3000, 3500, 5000, 7000 and 9000 AD).
4. GIS delivery ID C245, Regolith thickness in the Weichsel case for time points 2500 AD, 3000 AD, 3500 AD, 5000 AD, 7000 AD and 9000 AD.

**Table 6-3. GIS-datasets delivered for global warming case variant 1 and 2.**

GIS-dataset		
SDEADM.UMEU_FM_GEO_9165	SDEADM.UMEU_FM_GEO_9151	SDEADM.UMEU_FM_GEO_9166
SDEADM.UMEU_FM_GEO_9126	SDEADM.UMEU_FM_GEO_9162	SDEADM.UMEU_FM_GEO_9152
SDEADM.UMEU_FM_GEO_9103	SDEADM.UMEU_FM_GEO_9141	SDEADM.UMEU_FM_GEO_9157
SDEADM.UMEU_FM_GEO_9161	SDEADM.UMEU_FM_GEO_9150	SDEADM.UMEU_FM_GEO_9124
SDEADM.UMEU_FM_GEO_9163	SDEADM.UMEU_FM_GEO_9121	SDEADM.UMEU_FM_GEO_9144
SDEADM.UMEU_FM_GEO_9153	SDEADM.UMEU_FM_GEO_9145	SDEADM.UMEU_FM_GEO_9122
SDEADM.UMEU_FM_GEO_9149	SDEADM.UMEU_FM_GEO_9148	SDEADM.UMEU_FM_GEO_9147
SDEADM.UMEU_FM_GEO_9123	SDEADM.UMEU_FM_GEO_9169	SDEADM.UMEU_FM_GEO_9167
SDEADM.UMEU_FM_GEO_9160	SDEADM.UMEU_FM_GEO_9158	SDEADM.UMEU_FM_GEO_9142
SDEADM.UMEU_FM_GEO_9168	SDEADM.UMEU_FM_GEO_9155	SDEADM.UMEU_FM_GEO_9125
SDEADM.UMEU_FM_GEO_9159	SDEADM.UMEU_FM_GEO_9143	SDEADM.UMEU_FM_GEO_9164
SDEADM.UMEU_FM_GEO_9146	SDEADM.UMEU_FM_GEO_9127	SDEADM.UMEU_FM_GEO_9156
SDEADM.UMEU_FM_GEO_9104		

## 6.4.2 Site-specific hydrogeological properties of regolith types

### **Short description of data**

Hydrogeological properties (hydraulic conductivities (m/s) in the horizontal and vertical directions, specific yield (–) and specific storage coefficient (1/m)) of regolith types used in the MIKE SHE modelling.

### **Source of data**

The dataset is presented in Bosson et al. (2010, Table 2-3).

### **Used in model or assessment activity**

The dataset is used in MIKE SHE models run for present-day conditions, and in MIKE SHE models run for 3000, 5000 and 11,000 AD. For further details, see Werner et al. (2013).

### **Data used**

Data used for hydrogeological properties of layers of the RDM are given in Werner et al. (2013, Table 2-2). The data are identical to the data given in Bosson et al. (2010).

## 6.5 AMF Number 54

---

### **Output from AMF activity**

Landscape modelling

### **Input to AMF activity**

RN transport and dose

---

### **Dataset**

Thresholds of the landscape  
Geometric parameters and infilling parameters for the biosphere objects

---

## 6.5.1 Thresholds of the landscape

### **Short description of data**

Thresholds or points in time when the landscape object reaches a certain level above sea level are used to model the transition of marine basins into lakes and mires.

### **Source of data**

These thresholds are derived in the landscape development model (**Biosphere synthesis report**, Brydsten and Strömngren 2013).

### **Used in model or assessment activity**

These thresholds are used in the radionuclide transport model for the biosphere to determine transitions between marine, limnic and terrestrial parameter values (Saetre et al. 2013).

### **Data used**

The data used are stored in the file:

[svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\\_indata/ObjectSpecific.xlsm](http://svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter_indata/ObjectSpecific.xlsm)

## 6.5.2 Geometric parameters and infilling of the biosphere objects

### **Short description of data**

These data describe the geometric parameters of the biosphere objects over time as well as successional development where the lake is turned into a mire. The geometric parameters include both terrestrial and aquatic part of the biosphere objects and include area, depth of regolith layers and water column over time. The infilling of sediments in the aquatic ecosystems are described by the sedimentation and resuspension rate. The expansion of the mire into the lake is described by peat ingrowth.

### **Source of data**

These data are derived in the Landscape development model (**Biosphere synthesis report**, Brydsten and Strömberg 2013). The peat ingrowth is described in Grolander (2013).

### **Used in model or assessment activity**

Data are used in the radionuclide transport model for the biosphere (Saetre et al. 2013).

### **Data used**

The data used are stored in the files:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/ObjectSpecific.xlsm

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/TimeSeries.xlsm

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/Ter\_growth.xlsx

## 6.6 AMF Number 88

---

### **Output from AMF activity**

Ecosystem parameters and dose coefficients

### **Input to AMF activity**

RN transport and dose

---

### **Dataset**

Site generic data

Dose coefficients

---

### 6.6.1 Site generic data

#### **Short description of data**

A large set of data describes different ecosystem properties of the biosphere objects. These data are used in the radionuclide transport modelling for the biosphere to calculate dose to humans and non-human biota. Most of the data are general in the sense that they are general for the region of Forsmark e.g. net primary production of macrophytes, leaf area index for different crops, density of peat and diet fractions for humans. Data are mostly based on site investigations from different ecosystems (Andersson 2010, Aquilonius 2010, Löfgren 2010), but some are also taken from literature.

#### **Source of data**

The site generic data contain a large number of parameters. The data and underlying calculations are described in detail in Grolander (2013).

#### **Used in model or assessment activity**

The data are used in the radionuclide transport modelling for the biosphere (Saetre et al. 2013). Data files 1, 2, 3 and 4, are used for all biosphere calculation cases. In addition some alternative parameterisations are used for alternative climate cases. Data file 5 is used for the extended global warming case and data files 6 and 7 are used for calculation case talik (periglacial conditions).

### **Data used**

The data used are stored in the files:

- 1) svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/SiteGeneric.xlsm
- 2) svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/SiteGeneric\_aquatic.xlsm
- 3) svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/TimeSeries\_converted.xlsm
- 4) svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/OrganismSpecific\_NHB.xlsx
- 5) svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/WarmerClimate/SiteGeneric.xlsm
- 6) svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/ColderClimate/SiteGeneric.xlsm
- 7) svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/ColderClimate/SiteGeneric\_aquatic.xlsm

### **6.6.2 Dose coefficients**

#### **Short description of data**

Three dose coefficients for humans are used in the PSU assessment, dose coefficients for external exposure from radionuclides in or on the ground ( $\text{Sv h}^{-1}$  per  $\text{Bq m}^{-3}$ ), dose coefficients for ingestion ( $\text{Sv Bq}^{-1}$ ), and dose coefficients for inhalation ( $\text{Sv Bq}^{-1}$ ). In addition to this an additional calculation case were peat and wood are combusted for heat generation is applied in SR-PSU. The exposure to radionuclides in the contaminated air are considered and therefore dose conversion factors (doseCoef\_comb\_peat, doseCoef\_comb\_wood,  $\text{Sv/year}$  per  $\text{Bq/kg dw}$ ) for the exposure by inhalation of contaminated air following the combustion of peat or wood.

Dose estimates to non-human biota are calculated using organism, radionuclide and radiation type specific dose conversion coefficients. Eight different kinds of coefficients in total or for non-human biota are used (see Grolander 2013).

#### **Source of data**

The dose coefficients for internal exposure (inhalation and ingestion) are taken from ICRP publication 72 (ICRP 1996) and dose coefficients for external exposure are taken from EPA (1993). Dose coefficients for peat and wood combustion were taken from Stenberg and Rensfeldt (2014).

Dose coefficients used for non-human biota are derived according to the methods in Ulanovsky and Pröhl (2006) and Ulanovsky et al. (2008).

#### **Used in model or assessment activity**

The data are used in the radionuclide transport modelling for the biosphere (Saetre et al. 2013). The data are used for all calculation cases, see the **Biosphere synthesis report**.

### **Data used**

The data used are stored in the files:

- svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/RadionuclideSpecific.xlsm
- svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/RadionuclideSpecific\_NHB.xlsx

## 6.7 AMF Number 99

---

<b>Output from AMF activity</b> Landscape modelling	<b>Input to AMF activity</b> Potential for permafrost
--	--

---

**Dataset**  
Future vegetation and surface cover types  
Future lakes

---

### 6.7.1 Future vegetation and surface cover types

#### **Short description of data**

Vegetation type and surface cover type affect the potential for permafrost. These data were used in the 2D permafrost model simulations.

#### **Source of data**

The data are given in Hartikainen et al. (2010, Appendix J).

#### **Used in model or assessment activity**

Permafrost development at Forsmark was modelled with a numerical permafrost model in a 2D vertical cross-section (Brandefelt et al. 2013), as described in the **Climate report** and the **Model summary report**.

The results of these 2D permafrost model simulations were utilised in the definition of the two of the Climate cases representing prolonged interglacial conditions, the *global warming* and *early periglacial climate* cases, see the **Climate report** (Sections 4.2 and 4.3)

#### **Data used**

See Source of data.

### 6.7.2 Future lakes

#### **Short description of data**

Due to land-rise areas that are presently marine bays can in the future turn into lakes. This data describes future lakes in the landscape in the future.

#### **Source of data**

The permafrost model simulations were performed for a future period around 54,000 years after closure. According to the landscape development modelled for SR-Site (Brydsten 2006) and for SR-PSU (**Biosphere synthesis report**), no lakes are present along the 2D profile for this period.

#### **Used in model or assessment activity**

Permafrost development at Forsmark was modelled with a numerical permafrost model in a 2D vertical cross-section (Brandefelt et al. 2013), as described in the **Climate report** and the **Model summary report**.

The results of these 2D permafrost model simulations were utilised in the definition of the two of the Climate cases representing prolonged interglacial conditions, the *global warming* and *early periglacial climate* cases, see the **Climate report** (Sections 4.2 and 4.3).

#### **Data used**

See Source of data.

## 6.8 AMF Number 102

---

<b>Output from AMF activity</b> Site specific data	<b>Input to AMF activity</b> Ecosystem parameters and dose coefficients
<b>Dataset</b> Ecosystem data	

---

### 6.8.1 Ecosystem data

#### *Short description of data*

Data from site investigations in Forsmark are used to calculate ecosystem parameters. The data include data from both terrestrial and aquatic ecosystems.

#### *Source of data*

Data used to calculate terrestrial, marine and limnic ecosystem parameters are mainly based on site specific measurements and models for the Forsmark area (Löfgren 2010, Aquilonius 2010, Andersson 2010) but also some additional literature data from other sites are used. In addition, some recent reports with measurements of regolith characteristics are used.

#### *Used in model or assessment activity*

The input data from site and literature are used to assign parameter values to all ecosystem parameters described in the radionuclide transport model (AMF 88). The parameters describe properties such as primary production, production of edible food in the ecosystems, exchange between water and atmosphere, degassing from mires etc. All ecosystem parameters are thoroughly described in Grolander (2013).

#### *Data used*

Description of the data and the derivation of parameter values are found in the description of ecosystem parameters in Grolander (2013).

## 6.9 AMF Number 103

---

<b>Output from AMF activity</b> Biosphere object identification	<b>Input to AMF activity</b> Landscape modelling
<b>Dataset</b> Biosphere object delineation	

---

### 6.9.1 Biosphere object delineation

#### *Short description of data*

The delineation of biosphere objects is the geographical extent of the biosphere objects. The objects change with time as the areas where they are located change from sea to land areas; this means that the coordinates defining the objects are time dependent.

#### *Source of data*

The process of delineation of biosphere objects is described in the **Biosphere synthesis report** (Chapter 6).

### **Used in model or assessment activity**

The delineation is used for further landscape modelling where the areas of different ecosystem types (marine, limnic, terrestrial), and depth of regolith layers over time in the biosphere objects are modelled. The landscape modelling data for the biosphere objects is then used for the radionuclide transport and dose modelling (AMF 54).

### **Data used**

The data on biosphere object delineation are stored at:  
svn.skbn.se/trac/projekt/browser/SFR/SR-PSU/Landscape/Objects\_130306

## **6.10 AMF Number 138**

---

### **Output from AMF activity**

Surface hydrology

### **Input to AMF activity**

RN transport and dose

---

### **Dataset**

Inter-basin water exchange in marine area  
Inter-compartment water fluxes in marine, limnic and terrestrial ecosystems

---

### **6.10.1 Inter-basin water exchange in marine area**

#### **Short description of data**

A parameter quantifying inter-basin water exchanges (WF\_lobjxx\_xx), i.e. annual average water flows between neighbouring marine basins.

#### **Source of data**

The dataset is calculated using the flexible-mesh modelling tool MIKE 3 FM using site data from Forsmark. For further details, see Karlsson et al. (2010) and Werner et al. (2013, Sections 4.4 and 5.6).

#### **Used in model or assessment activity**

The dataset is used as input to the modelling of radionuclide transport in the biosphere (Saetre et al. 2013 and **Biosphere synthesis report**).

#### **Data used**

The data used are stored in the files:

svn.skbn.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/WF\_landscape.xlsx

svn.skbn.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/WarmerClimate/WF\_landscape.xlsx

These two datafiles are derived with Matlab scripts from files with hydrological modelling results:

The Matlab script 'svn.skbn.se/trac/projekt/browser/SFR/SR-PSU/Indata/matlab/WF\_landscape.m' is used to convert the file 'svn.skbn.se/trac/projekt/browser/SFR/SR-PSU/Indata/Marine/DHI\_delivery\_20121213/2012-12-13/BasinFluxes.xlsx'

The Matlab script 'svn.skbn.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/WarmerClimate/matlab/WF\_landscape.m' is used to convert the file 'svn.skbn.se/trac/projekt/browser/SFR/SR-PSU/Indata/Marine/DHI\_delivery\_20121213/2012-12-13/BasinFluxes\_WET.xlsx'

## 6.10.2 Inter-compartment water fluxes in marine, limnic and terrestrial ecosystems

### **Short description of data**

Parameters quantifying advective water fluxes between compartments of the radionuclide model for the biosphere (Saetre et al. 2013, **Biosphere synthesis report**) for the time steps 3000 AD, 5000 AD and 11,000 AD.

### **Source of data**

The dataset (totally 27 parameters) is calculated using the MIKE SHE water-flow modelling tool. For further details, see Werner et al. (2013, Chapter 7 and Appendix 1).

### **Used in model or assessment activity**

The dataset is used as input to the modelling of radionuclide transport in the biosphere (Saetre et al. 2013, **Biosphere synthesis report**).

### **Data used**

The advective water fluxes used are stored in the file `svn.skf.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter_indata/q_flux.xlsx` and water balances for each object and time steps are stored in excel files at `svn.skf.se/projekt/SFR/SR-PSU/Indata/Hydrology`.

## 6.11 AMF Number 164

---

### **Output from AMF activity**

Landscape modelling

### **Input to AMF activity**

Ecosystem parameter data and dose coefficients

---

### **Dataset**

Geometry parameters for the biosphere objects

---

## 6.11.1 Geometry parameters for biosphere objects

### **Short description of data**

Site specific data on depth and volume of aquatic basins determine the occurrence of aquatic primary producers which are dependent on photic depth (depth to which enough light penetrates to allow for photosynthesis). The delivered dataset includes mean depth, volume, area of photic depths in the marine and lake stages for the 7 biosphere objects in the safety assessment.

### **Source of data**

The geometry of the biosphere objects over time and derivation of this dataset is fully described in Brydsten and Strömngren (2013).

### **Used in model or assessment activity**

In the radionuclide transport and dose calculations the geometry of the future landscape is of interest, depths of different regolith layers, sedimentation, resuspension etc influence the transport and accumulation of radionuclides. Moreover, some parameters such as biomass and production of primary producers are used to calculate incorporation of radionuclides into biota (parameters: `biom_pp_micro`, `biom_pp_macro`, `biom_pp_plank`, `NPP_micro`, `NPP_macro`, and `NPP_plank`) are dependent on the geometry of the aquatic basins. The photic area, mean depth, and volumes of the aquatic marine basins and lakes were used to calculate biomass and production of primary producers in these ecosystems. The use of the geometry data in the calculations are fully described in Grolander (2013).

### **Data used**

The data used are stored in the file:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Landscape/Ecolego\_SFR\_7\_basins.xlsx

## **6.12 AMF Number 165**

---

**Output from AMF activity**

$K_d$ /CR in Biosphere

**Input to AMF activity**

RN transport and dose

---

**Dataset**

Element-specific  $K_d$  and CR data

---

### **6.12.1 Element-specific $K_d$ and CR data**

#### **Short description of data**

$K_d$  and CR values selected from the underlying site-specific and literature dataset. Geometric means, geometric standard deviations, minimum and maximum values are delivered together with best estimate values used in deterministic calculations.

#### **Source of data**

The parameterisation methods and selected  $K_d$  and CR data are described in Tröjbom et al. (2013).

#### **Used in model or assessment activity**

Element-specific  $K_d$  and CR values are used in the radionuclide transport and dose modelling to assess retention in soils and on particular matter and to assess uptake in biota, for details see Saetre et al. (2013).

### **Data used**

$K_d$  and CR values used in the radionuclide transport model for the biosphere are given in the file:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/ElementSpecific.xlsx

CR values used for the non-human biota assessment are given in the file:

svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\_indata/Element Specific\_NHB.xlsx.

## **6.13 AMF Number 166**

---

**Output from AMF activity**

Input data

**Input to AMF activity**

$K_d$ /CR in Biosphere

---

**Dataset**

Site-specific concentrations  
Literature  $K_d$  and CR data.

---

### **6.13.1 Site-specific concentrations**

#### **Short description of data**

Site-specific concentrations in water, regolith and biota from both Forsmark and Laxemar-Simpevarp are used to calculate site-specific  $K_d$  and CR values according to methods described in Tröjbom et al. (2013).

### **Source of data**

The site specific measurements of concentration used for deriving  $K_d$  and CR data are from several underlying SKB reports and are described in detail in Tröjbom et al. (2013).

### **Used in model or assessment activity**

The calculated site-specific  $K_d$  and CR values are used together with literature  $K_d$  and CR data (see Section 6.13.2) to derive  $K_d$  and CR parameter values used in the radionuclide transport model for calculation of retention in regolith layers and uptake in biota, see AMF number 165 (Section 6.12).

### **Data used**

The underlying site-specific chemistry dataset is compiled in an excel file: [svn://svn.skb.se/projekt/SFR/SR-PSU/Indata/Element specific/Leverans/Underlag/SKB\\_Chemistry\\_SR\\_PSU.zip](svn://svn.skb.se/projekt/SFR/SR-PSU/Indata/Element%20specific/Leverans/Underlag/SKB_Chemistry_SR_PSU.zip).

## **6.13.2 Literature $K_d$ and CR data**

### **Short description of data**

$K_d$  and CR values compiled in several openly available studies, these compilations of data contain  $K_d$  and CR data for many elements and for many types of soils and biota.

### **Source of data**

These compilations of literature data used are IAEA (2010), ICRP (2011) and data presented in the ERICA modelling tool (Beresford et al. 2008, Hosseini et al. 2008). The data used in the assessment are described in detail in Tröjbom et al. (2013).

### **Used in model or assessment activity**

The literature  $K_d$  and CR data are used (together with the site-specific  $K_d$  and CR data) to derive  $K_d$  and CR values for the radionuclide transport model for calculation of retention in regolith layers and uptake in biota, see AMF number 165 (Section 6.12).

### **Data used**

The literature  $K_d$  and CR values are stored in an access database:

[svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Element specific/Leverans/Underlag/SKB\\_Kd\\_CR.zip](svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/Element%20specific/Leverans/Underlag/SKB_Kd_CR.zip)

## **6.14 AMF Number 172**

---

<b>Output from AMF activity</b>	<b>Input to AMF activity</b>
Well investigation	Well related flow data

---

**Dataset**

Well investigation

---

### **6.14.1 Well investigation**

#### **Short description of data**

The dataset includes well locations, depths and discharges, and it is used as input to analyses of groundwater flow from SFR 1 and SFR 3 to future water-supply wells drilled in the rock. Specifically, the analyses concern (1) wells drilled and used by future agricultural settlements (i.e. wells associated to potential arable land) and (2) wells drilled in the contamination plume downstream from SFR (decoupled from any foreseeable land use for a self-sustaining community).

### **Source of data**

The methodology and background data used for assigning well locations, depths and discharges are described in Werner et al. (2013, Chapter 6).

### **Used in model or assessment activity**

The dataset is used in DarcyTools groundwater-flow modelling, specifically in the *global warming climate case* (CCM\_GW) and in the *wells in discharge area calculation case* (CCL\_WD). The setup of the DarcyTools modelling and associated modelling results are summarised in Werner et al. (2013, Chapter 6).

### **Data used**

Initial and relocated well locations (coordinate system RT 90 2.5 gon V/0:15) for the *global warming climate case* are given in Werner et al. (2013, Table 6-10) and initial and relocated well locations (coordinate system RT 90 2.5 gon V/0:15) for the *wells in discharge area calculation case* are given in Werner et al. (2013, Table 6-12).

In all calculation cases, a well depth of 60 mbgs (metres below ground surface) and a well discharge of 700 L/day are used.

## **6.15 AMF Number 173**

---

### **Output from AMF activity**

Surface hydrology

### **Input to AMF activity**

Ecosystem parameters and dose coefficients

---

### **Dataset**

Percolation

---

### **6.15.1 Percolation**

#### **Short description of data**

Percolation is the net downward flow (precipitation–interception–evaporation–transpiration) to the saturated zone causing leaching in the upper aerated and biologically active layer. This parameter is used to calculate the leaching of radionuclides previously incorporated into the organic soil layer of a drained mire used for agricultural purposes. The percolation is calculated in MIKE-SHE simulations (Bosson et al. 2010) describing the landscape of Forsmark at 2000 AD, 5000 AD and 10,000 AD.

#### **Source of data**

The percolation data are described in detail in Grolander (2013) and originate from Bosson et al. (2010).

#### **Used in model or assessment activity**

The data are compiled among the ecosystem parameters to fit the overall description of the different ecosystems and is further used in the radionuclide transport modelling for the biosphere (Saetre et al. 2013).

#### **Data used**

The parameter percolation is found among site generic data in the file:  
[svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter\\_indata/SiteGeneric.xlsm](svn.skb.se/trac/projekt/browser/SFR/SR-PSU/Indata/parameter_indata/SiteGeneric.xlsm)

## References

SKB's (Svensk Kärnbränslehantering AB) publications can be found at [www.skb.se/publications](http://www.skb.se/publications).  
References to SKB's unpublished documents are listed separately at the end of the reference list.  
Unpublished documents will be submitted upon request to [document@skb.se](mailto:document@skb.se).

### **References with abbreviated names**

**Main report, 2014.** Safety analysis for SFR. Long-term safety. Main report for the safety assessment SR-PSU. SKB TR-14-01, Svensk Kärnbränslehantering AB.

**Barrier process report, 2014.** Engineered barrier process report for the safety assessment SR-PSU. SKB TR-14-04, Svensk Kärnbränslehantering AB.

**Biosphere synthesis report, 2014.** Biosphere synthesis report for the safety assessment SR-PSU. SKB TR-14-06, Svensk Kärnbränslehantering AB.

**Climate report, 2014.** Climate and climate-related issues for the safety assessment SR-PSU. SKB TR-13-05, Svensk Kärnbränslehantering AB.

**Data report, 2014.** Data report for the safety assessment SR-PSU. SKB TR-14-10, Svensk Kärnbränslehantering AB.

**Initial state report, 2014.** Initial state report for the safety assessment SR-PSU. SKB TR-14-02, Svensk Kärnbränslehantering AB.

**Model summary report, 2014.** Model summary report for the safety assessment SR-PSU. SKB TR-14-11, Svensk Kärnbränslehantering AB.

**Radionuclide transport report, 2014.** Radionuclide transport and dose calculations for the safety assessment SR-PSU. SKB TR-14-09, Svensk Kärnbränslehantering AB.

### **Other references**

**Abarca E, Idiart A, de Vries L M, Silva O, Molinero J, von Schenk H, 2013.** Flow modelling on the repository scale for the safety assessment SR-PSU. SKB TR-13-08, Svensk Kärnbränslehantering AB.

**Andersson E (ed), 2010.** The limnic ecosystems at Forsmark and Laxemar-Simpevarp. SKB TR-10-02, Svensk Kärnbränslehantering AB.

**Aquilonius K (ed), 2010.** The marine ecosystems at Forsmark and Laxemar-Simpevarp. SR-Site Biosphere. SKB TR-10-03, Svensk Kärnbränslehantering AB.

**Auqué L F, Gimeno M, Acero P, Gómez J B, 2013.** Composition of groundwater for SFR and its extension, during different climatic cases, SR-PSU. SKB R-13-16, Svensk Kärnbränslehantering AB.

**Beresford N A, Barnett C L, Howard B J, Scott W A, Brown J E, Copplestone D, 2008.** Derivation of transfer parameters for use within the ERICA Tool and the default concentration ratios for terrestrial biota. *Journal of Environmental Radioactivity* 99, 1393–1407.

**Birgersson M, Andersson L, 2014.** Freezing of bentonite components in SFR – modeling and laboratory testing. R-14-29, Svensk Kärnbränslehantering AB.

**Bosson E, Sassner M, Sabel U, Gustafsson L-G, 2010.** Modelling of present and future hydrology and solute transport at Forsmark. SR-Site Biosphere. SKB R-10-02, Svensk Kärnbränslehantering AB.

**Boverket, 2004.** Boverkets handbok om betongkonstruktioner: BBK 04. Karlskrona: Boverket. (In Swedish.)

**Brandefelt J, Näslund J-O, Zhang Q, Hartikainen J, 2013.** The potential for cold climate conditions and permafrost in Forsmark in the next 60,000 years. SKB TR-13-04, Svensk Kärnbränslehantering AB.

**Brydsten L, 2006.** A model for landscape development in terms of shoreline displacement, sediment dynamics, lake formation, and lake choke-up processes. SKB TR-06-40, Svensk Kärnbränslehantering AB.

- Brydsten L, Strömgren M, 2013.** Landscape development in the Forsmark area from the past into the future (8500 BC – 40,000 AD). SKB R-13-27, Svensk Kärnbränslehantering AB.
- Börgesson L, Dueck A, Johansson L-E, 2010.** Material model for shear of the buffer – evaluation of laboratory test results. SKB TR-10-31, Svensk Kärnbränslehantering AB.
- Börgesson L, Åkesson M, Kristensson O, Malmberg D, Birgersson M, Hernelind J, 2014.** Modelling of critical H-M processes in the engineered barriers of SFR. SKB TR-14-27, Svensk Kärnbränslehantering AB.
- Christiansson R, Bolvede P, 1987.** Byggnadsgeologisk uppföljning. Slutrapport. SKB SFR 87-03, Svensk Kärnbränslehantering AB. (In Swedish.)
- Crawford J, 2010.** Bedrock  $K_d$  data and uncertainty assessment for application in SR-Site geosphere transport calculations. SKB R-10-48, Svensk Kärnbränslehantering AB.
- Crawford J, 2013.** Quantification of rock matrix  $K_d$  data and uncertainties for SR-PSU. SKB R-13-38, Svensk Kärnbränslehantering AB.
- Cronstrand P, 2014.** Evolution of pH in SFR 1. SKB R-14-01, Svensk Kärnbränslehantering AB.
- Dansgaard W, Johnsen S J, Clausen H B, Dahl-Jensen D, Gundestrup N S, Hammer C U, Hvidberg C S, Steffensen J P, Sveinbjörnsdóttir A E, Jouzel J, Bond G, 1993.** Evidence for general instability of past climate from a 250-kyr ice-core record. *Nature* 364, 218–220.
- Duro L, Grivé M, Domènech C, Román-Ross G, Bruno J, 2012.** Assessment of the evolution of the redox conditions in SFR 1. SKB TR-12-12, Svensk Kärnbränslehantering AB.
- EPA, 1993.** External exposure to radionuclides in air, water, and soil. Federal Guidance Report 12. EPA-402-R-93-081, U.S. Environmental Protection Agency, Washington DC.
- ETOPO2, 2001.** Global Digital Elevation Model (ETOPO2) representing gridded (2 minute by 2 minute) elevation and bathymetry for the world. Data were derived from the National Geophysical Data Center (NGDC) ETOPO2 Global 2' Elevations dataset from September 2001.
- Follin S, 2008.** Bedrock hydrogeology Forsmark. Site descriptive modelling, SDM-Site Forsmark. SKB R-08-95, Svensk Kärnbränslehantering AB.
- Georgiev G, 2013.** A seismic evaluation of SFR. Analysis of the Silo structure for earthquake load. SKB R-13-52, Svensk Kärnbränslehantering AB.
- Glamheden R, Mærsk Hansen L, Fredriksson A, Bergkvist A, Markström I, Elfström M, 2007.** Mechanical modelling of the Singö deformation zone. Site descriptive modelling Forsmark stage 2.1. SKB R-07-06, Svensk Kärnbränslehantering AB.
- Grolander S, 2013.** Biosphere parameters used in radionuclide transport modelling and dose calculations in SR-PSU. SKB R-13-18, Svensk Kärnbränslehantering AB.
- Hartikainen J, Kouhia R, Wallroth T, 2010.** Permafrost simulations at Forsmark using a numerical 2D thermo-hydro-chemical model. SKB TR-09-17, Svensk Kärnbränslehantering AB.
- Hedenström A, Sohlenius G, Strömgren M, Brydsten L, Nyman H, 2008.** Depth and stratigraphy of regolith at Forsmark. Site descriptive modelling, SDM-Site Forsmark. SKB R-08-07, Svensk Kärnbränslehantering AB.
- Hosseini A, Thørring H, Brown J E, Saxen R, Ilus E, 2008.** Transfer of radionuclides in aquatic ecosystems – Default concentration ratios for aquatic biota in the Erica Tool. *Journal of Environmental Radioactivity* 99, 1408–1429.
- Holmén J G, Stigsson M, 2001.** Modelling of future hydrogeological conditions at SFR. SKB R-01-02, Svensk Kärnbränslehantering AB.
- Höglund L O, 2001.** Project SAFE. Modelling of long-term concrete degradation processes in the Swedish SFR repository. SKB R-01-08, Svensk Kärnbränslehantering AB.
- Höglund L O, 2014.** The impact of concrete degradation on the BMA barrier functions. SKB R-13-40, Svensk Kärnbränslehantering AB.

- IAEA, 2010.** Handbook of parameter values for the prediction of radionuclide transfer in terrestrial and freshwater environments. Vienna: International Atomic Energy Agency. (Technical Report Series 472)
- ICRP, 1996.** International Commission on Radiological Protection. Age-dependent doses to members of the public from intake of radionuclides: Part 5, compilation of ingestion and inhalation dose coefficients. Oxford: Pergamon. (ICRP Publication 72; Annals of the ICRP 26)
- ICRP, 2011.** Wildlife Transfer Parameter Database. Available at: <http://www.wildlifetransferdatabase.org> [Februari 2011].
- Karlsson A, Eriksson C, Borell Lövestedt C, Liungman O, Engqvist A, 2010.** High-resolution hydrodynamic modelling of the marine environment at Forsmark between 6500 BC and 9000 AD. SKB R-10-09, Svensk Kärnbränslehantering AB.
- Keith-Roach M, Lindgren M, Källström K, 2014.** Assessment of complexing agent concentrations in SFR. SKB R-14-03, Svensk Kärnbränslehantering AB.
- Kjellström E, Strandberg G, Brandefelt J, Näslund J-O, Smith B, Wohlfarth B, 2009.** Climate conditions in Sweden in a 100,000-year time perspective. SKB TR-09-04, Svensk Kärnbränslehantering AB.
- Laaksoharju M, Smellie J, Tullborg E-L, Gimeno M, Hallbäck L, Molinero J, Waber N, 2008.** Bedrock hydrogeochemistry Forsmark. Site descriptive modelling, SDM-Site Forsmark. SKB R-08-47, Svensk Kärnbränslehantering AB.
- Löfgren A (ed), 2010.** The terrestrial ecosystems at Forsmark and Laxemar-Simpevarp. SR-Site Biosphere. SKB TR-10-01, Svensk Kärnbränslehantering AB.
- Löfgren M, 2014.** Recommendation of rock matrix effective diffusivities for SR-PSU. Based on formation factor logging in situ by electrical methods in KFR102B and KFR105. SKB R-13-39, Svensk Kärnbränslehantering AB.
- Löfgren M, Sidborn M, 2010.** Statistical analysis of results from the quantitative mapping of fracture minerals in Laxemar. Site descriptive modelling – complementary studies. SKB R-09-31, Svensk Kärnbränslehantering AB.
- Mas Ivars D, Veiga Ríos M, Shiu W, Johansson F, Fredriksson A, 2014.** Long term stability of rock caverns BMA and BLA of SFR, Forsmark. SKB R-13-53, Svensk Kärnbränslehantering AB.
- Moreno L, Neretnieks I, 2013.** Impact of gas generation on radionuclide release – comparison between results for new and old data. SKB P-13-40, Svensk Kärnbränslehantering AB.
- Nilsson A-C, Tullborg E-L, Smellie, J, Gimeno M, Gómez J, Auqué L, Sandström B, Pedersen K, 2011.** SFR site investigation. Bedrock hydrogeochemistry. SKB R-11-06, Svensk Kärnbränslehantering AB.
- Näslund J-O, Jansson P, Fastook J L, Johnson J, Andersson L, 2005.** Detailed spatially distributed geothermal heat-flow data for modeling of basal temperatures and meltwater production beneath the Fennoscandian ice sheet. *Annals Of Glaciology* 40, 95–101.
- Noguchi T, Tomosawa F, Nemati K M, Chiaia B M, Fantilli A P, 2009.** A practical equation for elastic modulus of concrete. *Structural Journal* 106, 690–696.
- Odén M, Follin S, Öhman J, Vidstrand P, 2014.** SR-PSU Bedrock hydrogeology. Groundwater flow modelling methodology, setup and results. SKB R-13-25, Svensk Kärnbränslehantering AB.
- Olvmo M, 2010.** Review of denudation processes and quantification of weathering and erosion rates at a 0.1 to 1 Ma time scale. SKB TR-09-18, Svensk Kärnbränslehantering AB.
- Pollack H N, Hurter S J, Johnson, J R, 1991.** A new global heat flow compilation. Available at: [http://www.wdcb.ru/sep/data/hdata/hf\\_global.dat](http://www.wdcb.ru/sep/data/hdata/hf_global.dat)
- Pusch R, 2003.** Design, construction and performance of the clay-based isolation of the SFR silo. SKB R-03-30, Svensk Kärnbränslehantering AB.
- Påsse T, 2001.** An empirical model of glacio-isostatic movements and shore-level displacement in Fennoscandia. SKB R-01-41, Svensk Kärnbränslehantering AB.

- Saetre P, Nordén S, Keesmann S, Ekström P-A, 2013.** The biosphere model for radionuclide transport and dose assessment in SR-PSU. SKB R-13-46, Svensk Kärnbränslehantering AB.
- Sandström B, Tullborg E-L, 2011.** Site investigation SFR. Fracture mineralogy and geochemistry of borehole sections sampled for groundwater chemistry and Eh. Results from boreholes KFR01, KFR08, KFR10, KFR19, KFR7A and KFR105. SKB P-11-01, Svensk Kärnbränslehantering AB.
- Sandström B, Tullborg E-L, Sidborn M, 2014.** Iron hydroxide occurrences and redox capacity in bedrock fractures in the vicinity of SFR. SKB R-12-11, Svensk Kärnbränslehantering AB.
- SKB, 2001.** Project SAFE Compilation of data for radionuclide transport analysis. SKB R-01-14, Svensk Kärnbränslehantering AB.
- SKB, 2008.** Safety analysis SFR 1. Long-term safety. SKB R-08-130, Svensk Kärnbränslehantering AB.
- SKB, 2010a.** Climate and climate-related issues for the safety assessment SR-Site. SKB TR-10-49, Svensk Kärnbränslehantering AB.
- SKB 2010b.** Data report for the safety assessment SR-Site. SKB TR-10-52, Svensk Kärnbränslehantering AB.
- SKB, 2011.** Long-term safety for the final repository for spent nuclear fuel at Forsmark. Main report of the SR-Site project. SKB TR-11-01, Svensk Kärnbränslehantering AB.
- SKB, 2013a.** Låg- och medelaktivt avfall i SFR. Referensinventarium för avfall 2013. SKB R-13-37, Svensk Kärnbränslehantering AB. (In Swedish.)
- SKB, 2013b.** Site description of the SFR area at Forsmark at completion of the site investigation phase. SDM-PSU Forsmark. SKB TR-11-04, Svensk Kärnbränslehantering AB.
- SKI, 1992.** Project Seismic Safety. Characterization of seismic ground motions for probabilistic safety analyses of nuclear facilities in Sweden. Summary report. SKI Technical Report 92:3, Statens kärnkraftinspektion (Swedish Nuclear Power Inspectorate).
- Stenberg K, Rensfeldt V, 2014.** Estimating doses from exposure to contaminated air when burning peat or wood. SKB R-14-33, Svensk Kärnbränslehantering AB.
- Stephens M B, Fox A, La Pointe P, Simeonov A, Isaksson H, Hermanson J, Öhman J, 2007.** Geology Forsmark. Site descriptive modelling Forsmark stage 2.2. SKB R-07-45, Svensk Kärnbränslehantering AB.
- Strömngren M, Brydsten L, 2008.** Digital elevation models of Forsmark. Site descriptive modelling, SDM-Site Forsmark. SKB R-08-62, Svensk Kärnbränslehantering AB.
- Sundberg J, Back P-E, Ländell M, Sundberg A, 2009.** Modelling of temperature in deep boreholes and evaluation of geothermal heat flow at Forsmark and Laxemar. SKB TR-09-14, Svensk Kärnbränslehantering AB.
- Thorsell P-E, 2013.** Studier av frysningssegenskaper hos betong från 1 BMA. SKB P-13-07, Svensk Kärnbränslehantering AB. (In Swedish.)
- Tröjbom M, Grolander S, Rensfeldt V, Nordén S, 2013.**  $K_d$  and CR used for transport calculation in the biosphere in SR-PSU. SKB R-13-01, Svensk Kärnbränslehantering AB.
- Ulanovsky A, Pröhl G, 2006.** A practical method for assessment of dose conversion coefficients for aquatic biota. *Radiation and Environmental Biophysics* 45, 203–214.
- Ulanovsky A, Pröhl G, Gómez-Ros J M, 2008.** Methods for calculating dose conversion coefficients for terrestrial and aquatic biota. *Journal of Environmental Radioactivity* 99, 1440–1448.
- Vidstrand P, Follin S, Öhman J, 2014.** SR-PSU Hydrogeological modelling. TD13– Periglacial climate conditions. SKB P-14-06, Svensk Kärnbränslehantering AB.
- von Schenck H, Bultmark F, 2014.** Effekt av bitumensvällning i silo och BMA. SKB R-13-12, Svensk Kärnbränslehantering AB. (In Swedish.)
- Werner K, Sassner M, Johansson E, 2013.** Hydrology and near-surface hydrogeology at Forsmark – synthesis for the SR-PSU project. SR-PSU Biosphere. SKB R-13-19, Svensk Kärnbränslehantering AB.

**Werner K, Norville J, Öhman J, 2014.** Meteorological, hydrological and hydrogeological monitoring data from Forsmark – compilation and analysis for the SR-PSU project. SR-PSU Biosphere. SKB R-13-20, Svensk Kärnbränslehantering AB.

**Whitehouse P, 2009.** Glacial isostatic adjustment and sea-level change. State of the art report. SKB TR-09-11, Svensk Kärnbränslehantering AB.

**Öhman J, Vidstrand P, 2014.** SR-PSU Bedrock hydrogeology. TD12 – Water-supply wells in rock. SKB P-14-05, Svensk Kärnbränslehantering AB.

**Öhman J, Follin S, Odén M, 2014.** SR-PSU Hydrogeological modelling. TD11 – Temperature climate conditions. SKB P-14-04, Svensk Kärnbränslehantering AB.

#### Unpublished documents

SKBdoc id,version		Issuer, year
1265613 ver 1.0	Data used in the SR-Site Climate program	SKB, 2011
1338361 ver 1.0	Climate domains Weichselian glacial cycle SR-PSU	SKB, 2015
1338745 ver 1.0	Summary of future climate projections	SKB, 2015
1358612 ver 1.0	SFR Förslutningsplan. (In Swedish.)	SKB, 2014
1359610 ver 2.0	Shore level data Forsmark Early periglacial climate case SR-PSU	SKB, 2015
1359616 ver 2.0	Shore level data Forsmark Global warming SR-PSU	SKB, 2012
1395214 ver 1.0	TD08 – SFR3 effect on the performance of the existing SFR1	SKB, 2013
1417785 ver 1.0	Översiktlig bedömning av konsekvenser för omgivande barriärer i BMA (SFR) till följd av ny behandling och förpackning av industrikoncentrat i Forsmark. (In Swedish.)	SKB, 2013
1427105 ver 4.0	Radionuclide inventory for the application of extension of the SFR repository – Treatment of uncertainties	SKB, 2014
1433163 ver 1.0	Shore level data Forsmark Extended global warming SR-PSU	SKB, 2015
1433269 ver 1.0	monthlymean_T2m_Forsmark_LOVECLIM_54k_180	SKB, 2015
1433270 ver 1.0	Maximum isotherm depths at the SFR location for a range of annual average air temperature at 2-m height	SKB, 2015
1433654 ver 1.0	xyz-x3a	SKB, 2015
1433662 ver 1.0	GHF full dataset lat long wgs-84	SKB, 2015
1436190 ver 1.0	Reconstructed Weichselian ice thickness and temperature Forsmark SR-PSU.	SKB, 2015
1436249 ver 1.0	Reconstructed Weichselian rsl data Forsmark SR-PSU.	SKB, 2015
1436252 ver 1.0	Reconstructed Weichselian ice thickness and temperature Forsmark SR-PSU.	SKB, 2015
1437317 ver 1.0	Ice thickness and temperature Weichselian glacial cycle Forsmark SR-PSU	SKB, 2015
1437319 ver 1.0	Permafrost and perennially frozen depth 1D simulation data Weichselian glacial cycle SR-PSU.	SKB, 2015
1437321 ver 1.0	Shore level data Weichselian glacial cycle Forsmark SR-PSU.	SKB, 2015
1469758 ver 1.0	AMF 141 Future climate evolution.	SKB, 2015
1469820 ver 1.0	ETOPO2.dos.	SKB, 2015
1469822 ver 1.0	readme ETOPO2.	SKB, 2015
1471889 ver 1.0	Weichselian glacial cycle climate case ice-sheet development.	SKB, 2015
1471890 ver 1.0	Weichselian glacial cycle climate case shore-level evolution	SKB, 2015
1481419 ver 1.0	Ny beräkning av Mo-93 i normkolli till PSU 2015-05 (In Swedish.)	SKB, 2015



## CC-number used in the compilation of input data for the radionuclide transport calculations and the corresponding CC-name used in the reporting of the PSU safety assessment

CC-number	CC-name	Description
<b>Main scenario</b>		
CC1	CCM_GW	Global warming
CC6	CCM_TR	Timing of releases
CC26	CCM_CD	Collective dose
CC2	CCM_EP	Early periglacial
<b>Less probable scenarios</b>		
CC20	CCL_IH	High inventory
CC24	CCL_FH	High flow in the bedrock
CC16	CCL_BC	Accelerated concrete degradation
CC13	CCL_BB	Bentonite degradation
CC3	CCL_EQ	Earthquake
CC7	CCL_CA	High concentrations of complexing agents
CC9	CCL_WD	Wells downstream of the repository
CC10	CCL_WI	Intrusion wells
<b>Residual scenarios</b>		
CC15	CCR_B1	Loss of barrier function – no sorption in the repository
CC17	CCR_B2	Loss of barrier function – no sorption in the bedrock
CC25	CCR_B3	Loss of barrier function – high water flow in the repository
CC21	CCR_RX	Changed redox conditions in SFR 1
CC12	CCR_EX	Extended global warming
CC18	CCR_UR	Unclosed repository
CC19	CCR_GC	Glacial and post-glacial conditions
<b>Scenario combinations</b>		
CC28	CCC_SC1	Combination of high flow in the bedrock and accelerated concrete degradation
CC29	CCC_SC2	Combination of high flow in the bedrock and high concentrations of complexing agents



